




LANCASTER
UNIVERSITY
ARCHAEOLOGICAL
UNIT

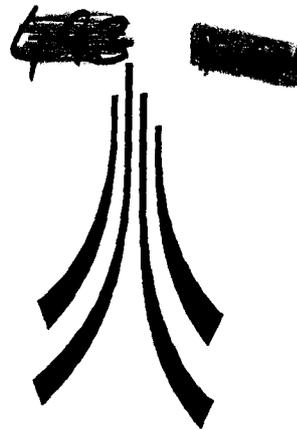

December 1997

MPP
GAS INDUSTRY

Step 1 Report

Monuments Protection Programme
The Gas Industry

Step 1 Report

Report no 1997-98/(043)/7659

Checked by Project Manager. <i>[Signature]</i> Date 10/2/98
Passed for submission to client. <i>[Signature]</i> Date 12/2/98

© Lancaster University Archaeological Unit
Storey Institute
Meeting House Lane
Lancaster
LA1 1TH

December 1997

CONTENTS

Acknowledgements	3
1. INTRODUCTION	4
2. GEOLOGY AND RAW MATERIALS	6
3. TECHNICAL OUTLINE	7
3.1 Definitions	7
3.2 Gasworks.....	8
3.3 Distribution	19
3.4 Natural Gas Installation.....	20
4. HISTORICAL OUTLINE	22
4.1 Background	22
4.2 Scientific Investigation and Experimentation, to 1805	22
4.3 Early Private & Central Gasworks, & Innovation. 1805 - 1820	23
4.4 Expansion, 1820 - 50.....	25
4.5 Established Industry	27
4.6 Expansion, Modernisation. Municipalisation & Electricity, 1875 - 1920	28
4.7 Restrained Rationalisation. 1920 - 49	29
4.8 Nationalisation, 1949 - 1967	30
4.9 Natural Gas. 1967 - 1986	31
4.10 Privatisation, 1986 on.....	33
5. ARCHITECTURAL CONSIDERATIONS	34
6. REGIONALITY	35
7. COMPONENTS	36
7.1 Gasworks.....	36
7.2 Distribution	42
7.3 Natural Gas Installation.....	43
7.4 Administrative Site.....	43
8. SOURCES OF INFORMATION	45
8.1 Published Works	45
8.2 Regional Works.....	45
8.3 Contemporary Works	46
8.4 Primary Records & Library Collections.....	46
8.5 Museum Collections & Historical Societies	47
8.6 Sources for Step 2 Data and Consultation.....	48
9. PRIORITIES AND RECOMMENDATIONS	49
9.1 Importance.....	49
9.2 Rarity.....	49
9.3 Recommendations	50

BIBLIOGRAPHY 51
APPENDIX 1 - ILLUSTRATIONS 61

Figure 1	Diagram showing principal parts of a gasworks (Gas Council - undated)	62
Figure 2	Figure 2: Plan of the Fazeley Street gasworks, Birmingham of 1875.....	63
Figure 3	plan of Rome Street Gasworks in 1922 (City of Carlisle Gas Undertaking Rome St Gasworks official inauguration plant)	64
Figure 4	Horizontal gas retort bench, cut away diagram (Cossons 1987, 221).....	65
Figure 5	Cross-section of a Glover-West vertical retort bench with coal and coke handling plant (City of Carlisle Gas Undertaking Rome St Gasworks official inauguration plant).....	66
Figure 6	Diagram of coke oven plant (Gas Council - undated).....	67
Figure 7	Diagram of Fulham Station Carburetted Water Gas Plant (Fulham Station booklet).....	68
Figure 8	Diagram of coal handling plant at coal jetty (Fulham Station booklet).....	69
Figure 9	Diagrams of exhausters, condensers and washers at Fulham (Fulham Station booklet).....	70
Figure 10	Benzole plant and gasholders at Fulham (Fulham Station booklet).....	71
Figure 11	Diagram of Natural Gas Shore terminal (Wilson 1974, 32-3)	72
Figure 12	Growth of National Transmission System (Williams 1981, 226-7).....	73

APPENDIX 2 - ADDRESS LIST FOR CIRCULATION 74

ACKNOWLEDGEMENTS

This report has been researched and written by Michael Trueman. Initially David Cranstone, and later Richard Newman, acted as project managers and Richard Newman read and commented upon both an initial draft and final text. I must express my considerable thanks to the large number of individuals, societies, SMR officers and other organisations whose responded to me letters and calls. LUAU expresses particular thanks to members of the Fakenham Town Gas Museum Trust for sparing the time to show Michael Trueman around the site and explain a host of technical details. We are grateful also to the helpful staff of the National Gas Archive in Partington, and to the staff of the Nottinghamshire County library service.



1. INTRODUCTION

- 1.1 Throughout the nineteenth and twentieth centuries, the gas industry has been concerned with supplying gas to customers for lighting, heating, cooking, and a range of industrial uses. It effectively began with the work of William Murdoch and Phillip LeBon in the 1790s. Gas plant was subsequently sold to provide private factory installations, but the industry came to be dominated by the system of centralised stations serving many customers through a distribution system. The spread of the industry to most parts of Britain occurred prior to about 1850, and subsequent growth was in terms of increasing numbers of customers and consumption. The gas industry also had an important effect on other industries, particularly the coal industry, which provided the raw material; the iron industry, in terms of demand for plant manufacture and as a customer for coke; railways, as a major transporter of coal and other materials; the chemical industries, which utilised by-products; and the coking industry, from which surplus gas was purchased (see Falkus 1967, 504). In historical terms, studies of the gas industry of the early nineteenth century have been an important element in a debate over the role of state intervention in industry at that period (see for example Matthews 1986). The major twentieth-century change has been the conversion to natural gas between 1967 and 1977, which inevitably meant the loss of many early remains. As with the later electricity industry, developments took place on an international stage with Britain, the USA, Germany and France all playing important roles. Remains in England must be viewed in this context and are of major importance.
- 1.2 There is a considerable literature on the history of the gas industry. This has focused mainly on technological and business history. Limited outline studies of field remains have been undertaken in certain areas and varying observations on individual sites have been reported in a wide variety of local journals and other publications. It must be stressed that in studying the gas industry, we are dealing with a product of the industrial revolution. Its broad history, particularly technological, is fairly well documented. This is supplemented by museum preservation of examples of equipment and machinery from its early development. Surviving archaeological remains are mainly buildings and gasholders, often of considerable scale. Their value lies in the potential to explain the specific architecture of the industry, its regional and company variation and the way in which gas technology was put into practice. Surviving *in situ* machinery is rare and, where it occurs, considerably enhances the value of remains. Conservation of remains of the later industry, with the development of more complex plant on ever larger sites is problematical. To the authors knowledge, no overview of the archaeology of the industry has previously been compiled.
- 1.3 The purpose of this report is to set a framework for the gas industry in the identification, recording and evaluation of industrial monuments and, where applicable, their selection for statutory protection under existing legislation, in accordance with the approach set down by English Heritage Archaeology Division (1992). Specifically the framework includes: a technical and historical outline; a breakdown of the archaeological components one would expect to encounter; an attempt to specify sources for identifying sites, and a statement of anticipated priorities for the industry. In achieving this, and in view of the dispersed nature of accessible

source material, it has been useful to partially pre-empt the data gathering process of Step 2 by circulating a questionnaire to potential contacts. The responses to this have formed a valuable source in compiling this report.

- 1.4 Following English Heritage guidance, the report deals specifically with the production of gas from coal and other raw materials (including methane gas drainage), together with the storage and distribution of gas, and the conversion to natural gas. It does not deal with the transport of fuel, customer consumption or the manufacture of gas plant. These subjects, together with related industries, in particular those using the by-products, should be considered in separate reports. It should be noted that the report has been written in tandem with the step 1 report for the oil industry.
- 1.5 Although, the industry grew as a *British* industry, and was operated as such within the nationalised and re-privatised sectors, this report is geographically limited to England. It does not attempt to cover the industries of Wales and Scotland. Nevertheless, as an industry that grew from international efforts and in order to allow informed judgements to be made, it has been deemed necessary to make reference to the industry of these and other countries.

2. GEOLOGY AND RAW MATERIALS

- 2.1 Prior to the 1960s conversion to natural gas, coal was the basic raw material of England's gas industry. Coal is a sedimentary rock, consisting essentially of carbonized vegetable matter formed under compression. It varies in flammability, bitumen content and its ability to be coked (see Buchanan 1972, 69-71; Gould & Cranstone 1992, 1-2; Trueman 1954). In order of decreasing hardness and increasing volatility, coals are graded as follows: *anthracite* (a clean burning hard coal of almost pure carbon); *bituminous coals* (which burn with a smoky flame - through cannel coal, steam coal, coking coal, and gas coal); to *lignite* or brown coal (which has strong traces of plant structure and is part way between bituminous coals and peat).
- 2.2 *Coking coals* formed the basis of the English gas industry. They produce a good quality coke and gas, and are found in Durham, Northumberland, Lancashire, Yorkshire, the Midlands, Somerset, and Kent. *Cannel Coal* had a particular value for the coal gas industry (it also played an important role in the coal-oil industry) as it produces a rich gas, although conversely a poor coke, and it provided the foundation of the early Scottish industry. In England, there are large deposits in South Lancashire.
- 2.3 Early gasworks could not transmit gas over large distances and as such needed to be near their customers, rather than the coal source. The transport of raw materials was therefore a fundamental concern, so that gasworks are generally located adjacent to a canal, river, or railway. For example, most of London's coal came by sea from the Durham coalfields, in contrast, most Yorkshire towns got coal from neighbouring pits, by rail or canal (Stewart 1958, 1, 4).
- 2.4 Throughout most of the nineteenth century the industry was essentially providing gas-light, utilising the *illuminating power* of the burning gas. This illuminating quality was measured in *candle power* (cp). Hence, for example, the early Scottish industry supplied gas with a high illuminating power of about 25cp, resulting from its heavy use of cannel coal. By contrast, the English industry used coking coal, which produced a gas with a typical illuminating power of 16 cp. In the late nineteenth-century two factors (both partly spurred by competition with the emerging electricity industry) led to a fundamental change from the *illuminating standard* to the *thermal standard*. The first development was that of the incandescent mantle burner, which provided light indirectly by using the heat of the burning gas to cause a solid to fluoresce. The second development, was a move to using gas for heating and cooking appliances. Formal change to the thermal standard was by act of parliament in 1920. From this date the *calorific value* of gas (ie the amount of heat released when fully burned) was measured in *British Thermal Units* (100,000 Btu =1 therm). In broad terms, town gas had a calorific value of 500 Btu; natural gas is about 1000 Btu.

3. TECHNICAL OUTLINE

This section summarises the processes involved in the gas industry. The purpose is to identify the function of **components** (including *plant*) which are to be used in the site assessments, together with other *important terms*. Items are described under class headings: GASWORKS, covering both the production of town gas by carbonization of coal and the gasification of other materials; DISTRIBUTION; and NATURAL GAS INSTALLATION, covering remains of the use of natural gas, mainly from the 1960s. The bulk of this section is based on Cossons 1987, Cotterill 1981, Elton 1958, Bracegirdle 1973, Stewart 1958, Sturt 1980, Wilson 1976.

3.1 DEFINITIONS

3.1.1 For the purposes of this report a distinction is drawn between *town gas* and *natural gas*. From its origins at the beginning of the nineteenth century up to the British adoption of natural gas in the 1960s, manufactured gas formed the basis of the British gas supply industry. Throughout that era, the term *town gas* was used to refer to any combination of combustible gases distributed through mains for domestic, commercial and industrial use. Town gas was largely produced by heating fossil fuels. Coal gas was the principal form, produced by the carbonization of coal. Cannel coal also used, particularly in Scotland - yielding a richer gas (20-28 candle power compared to 12-18cp of coal) but poorer coke. In London, in 1844, several companies sold gas from cannel coal, others supplied both coal gas and cannel coal gas in separate mains, whilst others mixed the two (Stewart 1958, 18-19).

3.1.2 Other fuels used including brown coal, coke, mineral oil, animal oils and wood, and in these cases the heating process was termed 'gasification'. Coke, resulting from the carbonisation process, became commonly used to produce 'water gas' (by passing steam over the heated coke) and 'producer gas' (by passing air over it) - the end products generally being blended with the town gas mix. In the case of 'oil gas', gasification was achieved by spraying the oil onto coke or heated brick, a process known as 'cracking'. Coal gas production required a considerable time (measured in weeks) to go from cold start to effective production; in contrast both water gas and oil gas could be brought into and out of production rapidly and as such became important for covering demand fluctuations. In addition to the manufactured gases, some natural gas was used, in the form of methane, which was abstracted from coal mines in a process known as 'methane gas drainage'.

3.1.3 Hence, the main forms of town gas were:

Coal gas: mixture of hydrogen, methane and carbon dioxide (typically 55%, 30%, 10%) produced (with impurities including tar, ammonia and hydrogen sulphide) by destructive distillation of coal.

Producer gas: mixture of carbon monoxide and nitrogen formed by passing air through red hot coke. Cheaply made in gasworks where used for heating retorts.

Water gas: mixture of hydrogen, carbon monoxide, carbon dioxide produced by passing steam through incandescent coke.

Oil gas: gas produced by the 'cracking' of oil (spraying onto heated coke or bricks).

Methane: highly flammable gas. main component of natural gas. Occurs commonly in mines.

3.1.4 *Natural gas* is gas found under pressure in the earth either alone or in association with crude oil and has quite different properties to the various town gases. It is a mixture of hydrocarbon gases, mainly methane, ethane, propane and butane - methane being the largest component. These gases have a high calorific value, that is a given volume of gas, when burnt, yields a large amount of heat (consequently half the volume of natural gas to coal gas is needed to achieve the same heat, hence natural gas is cheaper to store). The domestic burners developed for Britain's coal gas industry could not burn natural gas - basically because the higher calorific value of natural gas meant that, in order to burn, it required a higher quantity of air mixed in at the burner. The decision to switch to natural gas supplies in the 1960s therefore necessitated a major conversion programme for gas appliances.

3.2 GASWORKS

3.2.1 The essential stages in the manufacture of town gas were developed in Britain in the early nineteenth century. Whilst individual processes were refined and changed over the next 160 years, these essential stages remained and are summarised below.

Raw Materials & Preparation • This stage covered the preparation and handling of raw materials, for example storing and crushing coal.

Heat Treatment • The basic process to manufacture gas took two forms:

- *Carbonization* - heating of coal (at a temperature of over 500C; 'low temperature carbonization' was below 600C, 'high temperature carbonization' was up to 1000C.
- *Gasification* - heating of brown coal, coke and oil
- The output from this process was a crude gas, at a temperature of about 80°C. It appeared as a yellow-brown smoke, made up of a cocktail of permanent gases (varying mixtures of: hydrogen, oxygen, carbon dioxide, carbon monoxide, nitrogen, ammonia, naphthalene, sulphuretted hydrogen, organic sulphur compounds, cyanogen compounds, nitric oxide compounds, benzole) together with tar and water vapour.

Purification

- Certain constituents of the crude gas impeded its usefulness, and hence were regarded as 'impurities'. Hence a large part of a gasworks was taken up by a variety of *purification* processes for extracting these impurities. These processes divided into three:
 - *Condensation* - reduced the temperature of the gas, and condensed out tar and water vapour.
 - *Washing and Scrubbing* - removal of impurities by absorption in a liquid. Pre c1870, a *washer* was used to bubble gas through the liquid; a *scrubber* was used to pass gas over wetted surfaces. Post c1870, these distinctions lost.
 - *Dry purification* - process for removing sulphuretted hydrogen by passing gas over solid granules of lime or iron oxide held in purifier boxes.

*Pumping,
Metering and
Storage*

- A pump or exhauster was used to cause gas to flow through the various processes.
- Meters - recorded the quantity of gas manufactured.
- Gasholders - stored the gas ready for distribution.

3.2.2 In addition to this, waste products were collected and disposed of (wherever possible by sale) - specifically these were coke, ash clinker, waste heat steam, tar, ammoniacal liquor, and purifier wastes. The ammoniacal liquor of the early industry had no re-use value and was often dumped in canals, rivers and sea, or on waste ground around the works. Alongside this, the early wet purification process yielded a noxious sludge known as 'billy blue', which was often dumped with the ammoniacal liquor. These wastes and the smoke and dust from the furnace and the steam from quenching coke all contributed to the gas industry's well-earned reputation for filth.

RAW MATERIALS AND TRANSPORT

3.2.3 All coal GASWORKS required a coal store (Cotterill 1981, 31; Wilson 1976, 34). This could be covered or in the form of open stacks, although wet coal reduced the gas yield (the temperature of the coal needed to be monitored against the possibility of spontaneous combustion, and the heaps were apparently often sprayed with whitewash as a guard against pilfering). Similarly there was a requirement for a coke store; a lime shed, and a refuse lime heap. Later works incorporated coal handling plant and coke handling plant, and an oxide shed. A weighbridge would be used to monitor quantities. As gasworks needed to be sited close to centres of use, transport features were an important part of the site: for early works location next to a canal was common; a canal or riverside jetty would have provided unloading facilities. From the mid-nineteenth century, railway sidings were a common feature.

CARBONIZATION

- 3.2.4 The core of a gasworks was the retort house, incorporating a *chimney* for the furnace exhaust. Most early retort houses for *horizontal retorts*, had characteristically low profiles and are rare survivals. The later move to *vertical retorts* saw much taller buildings with characteristic wall ventilation. Inclined and vertical retorts occupied less space, allowing greater production capacity on a smaller area.
- 3.2.5 Coal was held and carbonised in *retorts*, heated by a *furnace*. Several retorts heated by the same furnace were known as an *oven*, and a row of adjoining ovens was known as the retort bench. (Cotterill 1981, 25; Stewart 1958, 12, 13). The particular pattern of retorts and furnaces was known as the retort bench *setting*. The gas/impurity mixture rose from each retort through an *ascension pipe* into an hydraulic main, essentially a large closed trough half filled with water (devised by Clegg in 1811). From the 1930s, individual *ascension pipes* gave way to a *standpipe* serving several retorts. The hydraulic main served as a seal and collected hot tar and ammonia which dissolved in the water and was continuously drawn off through a tar tower and thence to a liquor tank and tar well. The gas passed to a large pipe called the foul main, which cooled the gas and conveyed it to the first of various purification plants. A series of underground pipes then conveyed the gas between the different *purifier plant* and into the gasholders.
- 3.2.6 By 1805, Murdoch had devised both vertical and horizontal retorts. Many different forms and arrangements were tried out (eg Clegg's horizontal rotary retort of 1817). However, the essential development was from *horizontal cast iron retort* to the *fireclay retort* of the mid-nineteenth century to the *inclined* and *vertical retorts* of the late nineteenth and early twentieth centuries (although in 1956 one quarter of the capacity of the industry still came from horizontal retorts).
- 3.2.7 Key dates in the development the *horizontal retort* in relation to the English industry are as follows (Stewart 1958, 12-15):
- 1810s Clegg set standard arrangement for *iron retorts* (200 day lifetime).
 - 1831 George Lowe devised *through retort*.
 - 1853 Wide adoption of moulded *fireclay retorts* (1000 days).
 - 1920s Introduction of *silica retorts*, moulded or as shaped bricks/sections (3000-4000 days).
- 3.2.8 Clegg's early standard used cast iron with a D-section, measuring 12 inches x 12 inches or 20 inches x 14 inches and 7 feet long. Iron retorts had good conductivity (keeping down fuel consumption) and were non-porous (allowing production of gas at a high pressure, which carried it through the purification plant). However they had a short lifetime, as they easily expanded, disturbing the brickwork they were set in and, once cracked, they could not be repaired. Fireclay linings were developed by Grafton in Edinburgh in 1818, followed by retorts entirely of fireclay in 1820 (Cotterill 1981, 25-6). These were first used in England at Wolverhampton in 1822, but only came into general use from 1853. The advantages of fireclay were the greater lifetime, the lower distortion and the ability to withstand higher temperatures, although their porosity

created the need for *exhauster* pumps to drive gas through the purification processes. Silica as the material for retorts was introduced in 1920 in larger gasworks.

- 3.2.9 Many settings were used. For example with cast iron retorts, Clegg devised an early common arrangement of five retorts around a furnace. When clay retorts were introduced, mixed settings were initially used with the heat from clay retorts rising around iron retorts, but improved settings led to cast iron being dropped. An example is the 'Methuen' setting of ten retorts in two vertical rows of five (Stewart 1958, 12, 13).
- 3.2.10 The essential developments in relation to the *furnace* are concerned with the fuel used (Stewart 1958, 12, 13-14, 18-19; Wilson 1976, 35). Coal was the basic fuel at the earliest gasworks, with some later use of tar (used a lot in Scotland from 1826, but only occasionally in England from 1838, see Cotterill 1981, 25). The use of coke drawn from the retort was an important change (in 1839 by Alexander Cross according to Stewart 1958, 12, in 1819-23 by Croll in London according to Cotterill 1981, 25), and this became the normal fuel. Heat was by direct contact of flames from furnace to retorts, which was known as 'direct fired setting'. Cotterill (1981, 25) states that Rackhouse introduced indirect heating of several retorts in an oven in 1817.
- 3.2.11 In 1861 Siemens invented the *gas producer*, and producer gas was rapidly adopted as the fuel for large gasworks. The 'Generator setting' was used from 1865 to the 1930s in smaller works, whereby producer gas rose around the retorts and burned with injected air in a combustion chamber. In 1885 the Klonne recuperator was invented whereby outgoing spent producer gas was used to heat incoming air supplies; this was the 'regenerator setting' which remained in use up until conversion to natural gas.
- 3.2.12 The charging and drawing of retorts evolved from a manual to a mechanical operation, the latter being the norm after 1885 (Stewart 1958, 12, 13-14; Wilson 1976, 37). This change occurred as a complex series of technical improvements. One of the most basic was the change from the early retort iron lid with clay 'lute' seal, to Robert Morton's mechanical self-sealing lid of 1869. Initially retorts were charged by shovel with the spent coke raked out, quenched and stored for sale. The development of a *raised retort bench* allowed withdrawn coke to be dropped into an arched cellar for quenching and the U-shaped *scoop* (9 feet long, operated by three men) was developed for charging the long *through retort* of 1831.
- 3.2.13 Although there were early efforts at mechanical charging, including Clegg's 'rotary retort' of 1815, and further efforts in the 1830s (using conveyors, worm-drives and wagon chargers), the main development of *mechanical scoops* came after 1868 (Best, 1868; Holden & Mann, 1868; West, 1873; Taylor, 1878; Richards, 1878; Ross, 1881; Somerville, 1883). Subsequently other types of charger were devised, for example the *shot charger*, *projection charger* (using rotating wheel), and the *conveyor chain* (which also allowed retorts to be fully filled rather than the previous two-thirds). Discharging was also mechanised, for example by ram and conveyor:

shot:	• Arrol-Foulis	1891
	• Guest Gibbons	
conveyor:	• Green	1892

- | | | | |
|-------------|-------------------|-------|------------------|
| projection: | • Fiddes-Aldridge | 1900s | (and discharged) |
| | • Brouwer | 1900 | |
| | • Drake | | |
| | • Jenkins | | |
| | • Ride & Bell | | |

3.2.14 *Inclined retorts* were devised to utilise gravity in charging and discharging (Stewart 1958, 15). In 1869 Carpenter used a short-lived system of 8 inclined retorts fed by worm-drive. However, the main development was by Coze (1885 in Rheims), taken up in England by Morris at Brentford, using retorts at 32° to the horizontal with coal fed from overhead hoppers, and an iron stop releasing spent coke. The system was in wide use between 1890 and 1930. Although intermittent *vertical retorts* had been used very early on in the gas industry (Murdoch tried them in 1805, and Brunton designed one in 1828), their practical development was as an improvement on *inclined retorts* (Stewart 1958, 16-17). Rowan attempted an early version in 1885, but the first successful, and widely adopted, design was by Bueb (in Dessau, Germany) in 1902, using retorts grouped in threes with up to eighteen in a setting. Later designs built the three retorts as a single unit or *chamber*.

3.2.15 More importantly, continuous *vertical retorts* were developed in the early twentieth century (Cotterill 1981, 29; Stewart 1958, 16-17). Various experimental plant was built (1854 - Young, 1874 - Scott, 1902 - Settle and Padfield), but two designs were particularly successful. 'Woodall-Duckham' retorts were developed by W H Woodall at Bournemouth 1903; and 'Glover-West' retorts derived from a 1905 prototype at St Helens by S & T Glover and W Young. The retorts were heated via surrounding flues using producer gas (often from a separate *producer gas plant*), sometimes with recuperation and usually with waste heat boilers. Coal was fed at two-hourly intervals from overhead *hoppers* to a *charging pouch* above each retort. Continuous carbonisation took place over a seven hour period, with coke being removed in small amounts via a helicoidal *extractor* into a *coke box*. The latter was emptied at two-hourly intervals through gas-tight doors.

3.2.16 The significant advantages of these retorts, given below, led to their wide adoption:

- part of process was to introduce steam to retort base, this had the effect of allowing coke to be discharged without smoke, dust and steam.
- there was a saving in ground space
- efficiency of operation in mechanisation and fuel saving
- high quality of coke produced - good for resale as domestic smokeless fuel.

3.2.17 *Coke ovens* were mainly developed in the eighteenth century for the iron industry (Mott 1936; Stewart 1958, 17-18; Trinder 1981, 165). The earliest systems used coke heaps and, in north-east, beehive ovens. The latter increased in use and by the mid-nineteenth century were a standard feature of ironworks. European developments of coke ovens included elliptical ovens and vertical flues and the important *By-product recovery oven* dates from 1866. The first Simon-Carves recovery ovens in England were built at Crook, County Durham, in 1882. This technology appears to have made little direct contribution to gas industry technology until the twentieth century.

However, the coking industry and gas industry have interacted in the sense of sales of materials to each other. The purchase of coke oven gas was effectively restricted to undertakings in iron and steel areas, but this was widely done in the early twentieth century (the earliest at Lanchester in 1906; Little Hulton in Lancashire, 1910; Middlesborough, 1914; Leeds, Wath, Swinton, & Mexborough, 1918; and subsequently many more). Coke oven designs with their large chambers were adopted on a few large gasworks, the main advantage being their long working lifetime (typically 25 years). The first English gasworks to use them was in Birmingham in 1912 and in 1930, the massive Beckton works built a set of 'Koppers' ovens (Mott 1936, 104).

GASIFICATION

- 3.2.18 *Carburetted water gas plant* was used to generate *carburetted water gas*, a mixture of gases from two processes - *water gas* from passing steam over hot coke, and *oil gas* from cracking of oil on hot coke or brick (see Cotterill 1976; Elton 1958, 272; Mills 1995; Nabb 1997; Stewart 1958, 11, 20-22; Williams 1981, 29-30, 60-62).
- 3.2.19 *Water gas* is produced in retorts, passing steam through white hot coke (developed by Ibbetson, 1824; Donovan, 1830; Val Marino, 1839; White, 1847). The *cupola generator*, from 1849, used an air blast to heat coke alternated with the gas making steam blasts (developed by Gillard, 1849; White, 1849; Kirkham, 1854; Spice, 1875; Lowe in USA). In 1874 Strong patented a system for preheating the steam.
- 3.2.20 The gasification of non-mineral oil in retorts was carried out in the 1820s (patented by Taylor and devised in relation to whale oil), but was abandoned by 1830 as uncommercial. Related to this, in 1819, Gordon and Heard patented a process for compressing oil gas into cylinders as the basis of a proposed portable gas industry. This was also short-lived, although it was revived for lighting railway carriages in Germany, in 1871, and adopted in England in 1876, being supplied by Pintsch & Co and Pope & Son.
- 3.2.21 In 1874 Lowe devised a system for gas enrichment by spraying oil onto the hot coke inside a *water gas generator*, and in 1882 by spraying oil onto heated brick in a separate chamber (a *carburettor*) adjacent to a *water gas generator*. This result was the basic *carburetted water gas plant*, introduced to England in the 1890s and continued in use (with refinements) until the introduction of natural gas in the 1960s. In the twentieth century, some plant was also developed that used oil as the sole raw material.
- 3.2.22 The *complete gasification of coal* was developed from Siemens' gas producer technology, that is passing a mix of steam and air through a fuel bed. Part of the spur for this development was a growing shortage of coal suitable for carbonization and it was used initially for non-coking bituminous coals. The technology saw many refinements in the period 1890-1920; about 150 small complete gasification plants were built in Britain in 1918-21 (by Tully); and it was revived in the 1930s and after the second world war. A particular development was that of Mond in 1889, to allow the use of coking coals; a system improved by Lymn in 1920 and subsequently used in Staffordshire for industrial heating. *Complete gasification* technology was mainly used

and developed in the USA (for anthracite) and Europe (for Lignite), hence in the 1930s, the *Lurgi process* was developed in Germany, using oxygen and superheated steam in a continuous process that produced gas at high pressure (see Stewart 1958, 21-2; Williams 1981, 123-5). Lurgi plant was built at Westfield, in Scotland (in 1958-60), and at Coleshill, in Birmingham (closed in 1969).

PURIFICATION

- 3.2.23 The degree to which purifying processes changed through the nineteenth and twentieth centuries was affected in part by the development of understanding of these processes, and in part by discoveries of uses for the impurities. The processes are described here from the point of view of a coal gasworks. In broad terms, the processes were equally applicable to water gas and oil gas, although these do not contain ammonia (Cotterill 1981, 32-4, 35; Stewart 1958, 23-9).
- 3.2.24 In the early industry, the chemistry behind purification was poorly understood. The basic need was to remove tar; and to reduce the content of those constituent gases that were of no use for lighting (CO₂, O₂ and N₂); and to remove gases that left an unpleasant effect when burnt (particularly ammonia, hydrogen sulphur and sulphur compounds). In all cases, tar would have been washed into a **tar pit** and 'ammoniacal liquor' was drained into a **liquor tank**.
- 3.2.25 The very earliest purification, beyond simply cooling and washing in water, was a *wet process*, based on the discovery (by Henry in 1805) that washing gas with a suspension of slaked lime appeared to remove the impurities (the process was generally referred to as 'cream of lime'). Clegg originally put lime in the gasholders. However **lime washers** were quickly developed (various plants devised mainly by Richards, Clegg and Malam) and were standard up to c1845 in spite of the problem of 'billy blue' waste (Chandler & Lacy 1949, 60-67). They incorporated *agitators*, initially manually operated, later mechanically driven. In addition, purification plants would have had a **lime shed**, and a **refuse lime heap**.
- 3.2.26 The **Condenser** was essentially a long run of piping which allowed the gas to be cooled (by air or water), in order to condense out more tar and ammonia. Murdoch had used a *vertical cylindrical condenser* which used a water jet to precipitate out the tar. In 1817, John Perks designed a *multiple inverted U-tube air-cooled condenser* design, which became common. Improved designs were spurred in 1860 and 1870 by legislation over allowed levels of impurities. Types devised were *annular condensers* (Kirkham 1860, Wright Walker & Padham 1865), the *zigzag condenser* (Graham 1867), and *water-cooled condensers* (Livesey 1870, Cleland 1873, Morris and Cutler 1874, Clapham 1884). **Electro-detarrers** were introduced in the twentieth century, placed after the condenser.
- 3.2.27 **Washers** and **scrubbers** were other distinct plant types devised to further reduce residual tar and ammonia by absorption in water, and were placed after the condenser. Both techniques were improved as the use of by-products grew. The **washer** was devised by Wilson in 1817; it consisted of a gas-tight box in which gas was passed through perforated wooden boards running with water. This was improved by Cathels (bubbler washer of 1868), Livesey (using perforated metal tubes, 1870) and Walker

(using fine slots in metal tubes, 1872). The *washer* mainly removed tar, but also some ammonia. The more efficient *tower scrubber* was devised by George Lowe in 1846 to remove the remaining ammonia: it employed shelving and a water spray from the summit of the tower. It was improved by Mann and Walker in 1871. The alternative *rotary washer*, devised by Hills in 1848, sprayed water onto brushwood in a rotating cylinder.

- 3.2.28 Up to the 1840s the *wet process* was the dominant means of removing hydrogen sulphide and sulphur compounds. The expansion of the industry and increasing size of gasworks over this time inevitably meant increasing amounts of lime waste from this process. An alternative process, *dry lime purification*, avoided the problem. This method was originally devised by Reuben Phillips in Exeter in 1817, and involved passing the gas over slats which held damp burnt lime. It was gradually adopted from the 1840s, and was particularly taken up after the 1860 and 1871 acts that introduced stringent controls and independent testing at gasworks. In addition, there were experiments with the use of various metal oxides in place of the dry lime: manganese oxide by Croll in 1840, and iron oxide by Evans in 1842, Langmaid in 1848, and Laming and Hills in 1849. Hills patented a process for *revivifying* iron oxide that led to its wide use. The spent oxide was spread out in an open *oxide shed* to allow oxygen to react with the iron sulphide, so releasing sulphur and reforming the iron oxide. However, iron oxide only removed hydrogen sulphide from the gas so that lime continued to be used alongside it until the early twentieth century when the legal requirement to remove sulphur compounds was dropped. In fact, because of the resale value of the lime as agricultural fertilizer many sites continued to use dry lime by itself (55% in 1901). In all cases, *purifiers* were the basic component - consisting of a series of large cast iron boxes, holding the trays of dry lime or iron oxide, with piping and *valves* to control the cycle of use of the boxes. From 1921 some sites used reinforced concrete instead of cast iron. In 1930, the *tower purifier*, with removable trays operated by crane, was introduced from Germany and became popular for large sites.
- 3.2.29 Beyond these basic processes, further refining took place in the later stages of the industry's history, either to improve gas quality or to extract a useful by-product. *Cyanogen plant* was employed on some large sites between 1885 and 1922, the Cyanogen liquor being of use in printing and dyeing (for example to make 'Prussian blue'). It was eventually abandoned as uneconomical. *Naphthalene plant* was used from c1912 to remove naphthalene, a hydrocarbon which higher carbonising temperatures caused to create a flaky deposit in the gas plant. *Benzole plant* was adopted during the First World War to boost explosives manufacture and subsequently was maintained for resale to the chemical industry for dyestuffs, plastics and as motor spirit. The basic process was either by washing with gas oil or by passing gas through chambers with carbon pellets. From 1930 *gas drying plant* was used to reduce water vapour in the gas, and so reduce the problem of water deposition in the mains.

PUMPING

- 3.2.30 The purpose of pumping at a gasworks was to draw gas through the purifying processes and to provide energy to lift the bells in the *gasholders*, which in turn pressurised the mains (Elton 1958, 271; Stewart 1958, 34-5). In 1825 Broadmeadow

identified purifiers as slowing the gas flow resulting in so-called 'back pressure' in the condenser which in turn reduced the amount of gas leaving the retorts. In spite of the high pressure possible with iron retorts, this limited the amount of purification that could be carried out, resulting in ammonia reaching the mains and causing corrosion. To combat this, Broadmeadow invented the exhauster, a one way pump placed after the condensers. However, only with the widespread use of clay retorts from the 1850s, with their lower pressures, did exhausters become a standard component of gas plant. Many developments of the exhauster took place. John Grafton's efficient version was widely used, as was Beale's rotary steam exhauster and subsequently the Rateau turbo exhauster.

1830	<i>2-bell</i>	(Broadmeadow)
1840	<i>reversed wet drum</i>	(Malam)
1841	<i>3-bell</i>	(Grafton)
1841	<i>piston-type</i>	(Anderson)
1843	<i>3 bell with flap valves</i>	(Methuen)
1847	<i>double-lobed</i>	(Jones)
1848	<i>rotary steam type</i>	(Beale)
1850	<i>steam ejector type</i>	(Cleland)
1910	<i>turbo</i>	(Rateau)

- 3.2.31 Exhausters were initially driven by steam engine, later by gas engine (common on small rural works), steam turbine or electric pump. Common practice was for each pump to be driven by its own steam engine, but line shafting was also employed (and was essential for gas engines, with their higher speeds). To ensure an even 'pull' on the gas by the exhauster, a small governor alongside it controlled flow between the inlet and outlet. These components could be housed in an exhauster house and there may have been a separate engine house, with *boiler* and *chimney* (see Watkins 1978, 108-13). From the early twentieth century, a gasworks often had its own power house to provide electricity.

STORAGE

- 3.2.32 The purpose of a gasholder is to provide a storage buffer between the production processes and the distribution of gas to customers (Miele 1996; Stewart 1958, 32-4; Sturt 1980). It also provides the *mains* pressure. In 1782 Lavoisier devised the forerunner of the gasholder, and the earliest practical holders followed his design: a cubical wooden framework covered with sheet iron, with the bottom end open and submerged in water. However, by 1816, the normal arrangement was for a cylindrical *bell*, supported by a central chain and counterbalance system, lifted by gas pressure and sealed at its base in a *water tank*. There were many short-lived variations on this and one, Clegg's *rotating gasholder* of 1815, led to the early *meter* design (see below).
- 3.2.33 During the first quarter of the nineteenth century gasholders were frequently encased in brick built gasholder houses. This practice based partly on the erroneous belief that

gas storage held a major danger of explosion and partly with the intention of protecting the holder from wind and rain.

- 3.2.34 The very earliest *water tanks* were made from second-hand wooden brewers vats (a use that survived to 1843). However, the basic designs that became standard, were in place by 1818:- *buried* (with brick walls, cement or puddled clay waterproofing and a central 'dumpling' to reduce the water needed), *semi-buried* (with an earth bank built against the tank walls that could be used on poor ground) and *above ground* (of expensive cast or wrought iron plates but which could be used on a wide range of locations).
- 3.2.35 The central chain support of the earliest holders gave way to more complex *guide framing*. The earliest *column guide* used a single central cast iron column, designed by Malam. Guide rollers at the top and bottom of the bell ran on rails fixed to the column. The next development, for bigger bells, to use a series of independent cast iron lattice girder tripods placed around the circumference of the water tank (the 1830 Fulham no 2 gasholder is a unique survival of this type). With the use of *telescopic holders*, there was a need for greater stability, so banded framework of cast and wrought iron ties was added to the top and bottom of the guide frame, and the tripods were replaced by cast iron columns. Paddon ties were used from 1870. From the 1880s still bigger holders were built using rolled section steel or lattice girders in place of the columns and diagonal tension rods in the frame: this followed work by Cripps and Baker and was pioneered by Livesey.
- 3.2.36 To the middle of the nineteenth century, most gasholders were single lift, with the *bell* of riveted iron or steel plate, and *carriage rollers*, at the edge of its spherical crown and base, running against the column guides. A *telescopic holder* was designed in England by Tait in 1824 and were first used in 1826 in Leeds (the first patent was in 1827 by Nicholson, who abandoned it due to Tait's earlier published design). This design allowed more gas to be stored on a given area of land, and proved cheaper to build than two single lift holders (although the increased pressure had to be dealt with). It consisted of an inner bell with a U-shaped base rim (the *cup*), and a *lift* running around it with an inverted U-shaped upper rim (the *grip*). As the *bell* rose under pressure the water-filled *cup* linked in to the *grip* and carried the *lift* with it. The cup and grip of early designs were of riveted sections, which caused leakage problems, but from 1862 bent sections became the common practice. The further problem of freezing in the winter necessitated electrical and steam-based *antifreeze systems*. The first successful 3-lift holder followed in 1861 at Blackfriars, with the first 4-lift in 1886 at East Greenwich. The 1880s also saw the *flying lift* (pioneered by Livesey at Rotherhithe in 1888), where a top lift rises above the supporting standards. Broadly, until the 1880s, small gasworks had *single lift holders* and larger works had the *telescopic type*.
- 3.2.27 A *cable-guided holder* designed by Pease in 1887, replaced the guide frame with a system of wire cables. This had limited use to c1910, but became obsolete. More importantly, the *spirally guided holder* was patented by Gadd and Mason in 1887 and the first was built in Northwich, Cheshire in 1889-90. In place of a guide frame, there was a system of rails fitted to the exterior of each lift running at an angle of 45°. Carriage rollers on the water tank and on the top of each lift ran against these rails.

Water seals were provided by the *cup* and *grip* system of telescopic holders. Initial riveted construction was replaced by welding in the twentieth century. These holders were cheaper to build than column-guided holders, and became common additions and replacements at gasworks; by the mid-twentieth century they were the dominant form in Britain.

3.2.38 *Dry holders* were adopted from German and USA developments in the twentieth century, although the concept was devised in England by Caslon in 1823 and developed by Knapton in 1849. Essentially these are *waterless piston holders*, which avoid the construction problems of the water tank (requiring lighter foundations), re-wetting the gas and the needs for anti-freeze systems of wet holders; they also provide a constant pressure irrespective of the amount of gas in them. Their disadvantage is the need for greater maintenance. Relatively few were built in Britain. There are three main types. The *M.A.N. holder* was developed in Germany in 1915-16, and the first example built in Britain dates to 1927. It has a polygonal shell of steel plate with inner stanchions. The steel *piston*, with radial and tangential rollers which run in the stanchions, is sealed by counterbalanced rubbing plates in a tar- (later oil-) filled channel. The *Klönne holder* was patented in Germany in 1882, but only built in 1927. The first British holder was built in 1931. It has a cylindrical steel shell with outer stanchions and a *piston* with two sets of radial rollers (which allow it to rotate) and a seal of lubricated rubberised textile. The *Wiggins holder* was effectively an American development of the Caslon/Knapton designs, used initially in the oil industry. Designed by John Wiggins in 1936, it was first built in 1940, and was used for gas in Britain from the 1950s. It has a welded cylindrical shell with a slightly domed roof. An inner *piston* has a flexible seal with an outer telescopic *fender* and a further seal to the shell. As the piston rises, it picks up the fender, guided by a counterbalance system.

3.2.39 The *pressure holder* was developed from the 1930s, and consists of a sphere or a horizontal cylinder with dished ends. It holds gas at high pressure, releasing it to distribution systems through pressure-reducing *governors*.

METERING AND PRESSURE

3.2.40 Gasworks staff monitored the quantity and quality of gas produced with a *station meter*. The *wet meter* was devised by Clegg in 1817, following the principle of his earlier *rotating gasholder*, and improved by his son-in-law, John Malam: gas displaced water in the chambers of a paddle wheel or drum causing it to rotate, this action operating a dial. A *station governor* maintained constant pressure into the mains. This was again devised by Clegg, in 1815, and resembled a small gasholder set over the mains pipe, with a self-regulating valve sitting within the gas flow, and the pressure set by placing weights on its floating bell. Further developments by Hunt, Cowan, Parkinson and Braddock increased the precision of this device, and an alternative design used a flexible diaphragm in place of the bell. An 1879 design by Stott used a mercury seal. A *meter house* commonly held these components, although the governor could be located separately in a *valve house*, from where gas flow into and out of the gasholders was controlled (see Cotterill 1981, 31; Elton 1958, 270; Stewart 1958, 389; Williams 1981, 20; Wilson 1976, 39-40).

ADMINISTRATION

3.2.41 In addition to these major components, a range of ancillary features were present at a coal gasworks. These included a boundary fence and a gateway into the works, a workshop and a smithy for the many running repairs, a stable, a stores, a laboratory, offices, gas showroom, and a manager's house. Large, later works had an administrative block, with *offices*, *canteen* and *toilets*, and generally a *car park*.

3.3 DISTRIBUTION

3.3.1 The purpose of a gas distribution system was to send gas to customers at an even pressure and volume at any time of day and at whatever distance from the place of storage, such that it would fuel appliances (Cotterill 1981, 36-7; Elton 1958, 271; Stewart 1958, 37-42; Wilson 1976, 40-42). In the early industry, there was a great deal of variation in the ability to achieve this. The pressure in the system came from the falling weight of gasholder bells, controlled by the station governor. Early systems, and later small systems, were based on *low pressure mains* laid through the supply area, decreasing in size with distance from holders. *Street mains* branched off this, with further branching of *service pipes* to individual customers, where a *meter* measured the amount of gas consumed. Piping in the house was known as *carcassing*. Such simple systems only worked for small areas and more complex systems evolved to deal with increased overall demand, peak demands, multiple gas station supplies, and bigger areas (especially towns). Four elements to these system are described by Stewart (1958, 38):

Low pressure network

Medium pressure feeder mains

- fed by *pumping plant*
- fed from gasworks to *governors* at strategic points on low pressure network
- fed gasholder stations on the edge of the system, which in turn fed a low pressure network via *governors*

High pressure grid

- linked gasworks and gasholder stations
- fed from gasworks to *governors* at strategic points on a low pressure network

Boosters

- to boost pressure at times of low gasholder levels or during heavy demand.

3.3.2 Boosters were pumps similar to exhausters, situated in a booster house at gasworks or gasholder stations, and driven either by steam, gas engine or electric motor. Turbine-driven fan-type boosters became common in the twentieth century (see Watkins 1978, 108).

3.3.3 In addition to this, some rural systems used small diameter high pressure steel mains to deliver gas direct to each customer, with pressure-reducing valves bringing the gas to the correct pressure for burning. In addition some mains were for delivering raw

'coke oven' gas, from ironworks and collieries, to a gasworks for purifying. In 1931, the Sheffield Gas Company gained permission to build a high pressure grid for this purpose. The general progress was to larger systems, culminating in nationalisation of the industry, when a high pressure *backbone mains* was built.

- 3.3.4 House *meters* were originally wet meters, with dry meter designs being used from the 1850s and coin in the slot meters from 1889 (Bracegirdle 1973, 144; Elton 1958, 272; Stewart 1958, 44).
- 3.3.5 For mains construction, lead, wood and stone were tried by the early industry. However, cast iron rapidly became the norm (originally introduced for water in 1810). In 1919 spun-cast replaced pit-cast manufacture and allowed longer sections of pipe (from 9 feet - 12 feet to 12 feet - 18 feet). Lengths were joined by flanges or lead-filled sockets or, from 1826, socket and spigot joints. These were improved in 1921 by the use of a rubber ring, and from 1928 by a lead ring. Control valves at points on the mains were used by the early industry as a precaution against repair needs, although this was discontinued in favour of the practice of inserting pigs bladders (later rubberised canvas) during the repair process! After the second world war, valves were adopted again. From 1840, lengths of wrought iron, and later steel, were used (for greater tensile strength) where mains crossed bridges or in tunnelling. From 1900 seamless steel tubes were increasingly used for mains and from 1933, there was occasional use of reinforced asbestos cement.
- 3.3.6 *Service pipes* were small diameter 'barrels' (made in the same way as gun barrels and in period following the Napoleonic wars, actually made of old gun barrels). They were replaced by wrought iron. In 1813 Russell devised a system of screwed and socketed wrought pipes: in 1825, Whitehouse patented a butt welding process which allowed manufacture of longer lengths, and in 1840 the lap welding process was devised. From 1940, steel replaced wrought iron. Corrosion protection was provided by wrapping the pipes in bitumenised hessian or laying in wooden troughs filled with pitch.
- 3.3.7 *House carcassing* was originally in lead and copper. However copper reacted with ammonia and could cause blockages and was replaced by iron tubing. Lead piping was replaced by 'compo pipe', a thin lead coated with tin. In the twentieth century, iron or steel tubing has been used.

3.4 NATURAL GAS INSTALLATION

- 3.4.1 The components in this section refer entirely to the natural gas industry of the 1950s and later (Williams 1974). The main component relevant to this report is the shore terminal (or *beach* or *reception terminal*). These are large complex sites, and an entirely twentieth-century feature, characterised by large amounts of specialised plant and pipework, above and below ground, which is spread over large areas. In terms of the MPP it is the terminal as a whole that is of interest. Different parts of a terminal are run by different organisations.
- 3.4.2 The technical structure of industry as it stands in 1997 is as follows (see TransCo's *Beach to Meter* booklet, available from TransCo Public Relations, and BP 1972, 170-

248). Companies known as *gas producers* extract *natural gas* via *rigs* in *undersea gas fields* around Britain, and deliver it, via *undersea pipeline*, to one of six **shore terminals** (Bacton, Theddlethorpe, Easington, Teeside, Barrow and St Fergus), where the gas is refined (this includes reduction of water and hydrocarbon content, sulphur purification and odorizing). Gas is then transported, via pumping in 20 *compressor stations* (using gas-fuelled jet engines) through the pipeline or *high pressure main* of the *National Transmission System* (either directly or via the large capacity *Storage Network*) to 120 *off-take stations*, from where it is delivered to 14 power stations, 8 large industrial users, and 4 *area transmission systems*, which further divide into 13 *Local Distribution Zones*. The latter includes *low pressure storage* and *low pressure mains* that deliver to customers. There are also *interconnector* pipelines to Ireland and the continent. Within this system, the *Storage Network* includes *Liquid Natural Gas storage* (English sites at Avonmouth, Partington, Isle of Grain), *Salt Cavity Storage* at Hornsea, and *Rough Storage* in the now depleted Rough gas field. Management of gas flow and delivery is via a *System Control Centre* and *Area Control Centres*. About 40 companies, referred to as *gas Shippers*, buy the stored gas and sell it to customers.

4. HISTORICAL OUTLINE

4.1 BACKGROUND

4.1.1 The technological history of gas manufacture is essentially one of refinement and increase in scale of that process. A considerable literature exists on the history of the industry, although there has been relatively little mainstream archaeological investigation of physical remains. The history of the gas industry does appear to break down into a series of periods of development that may be reflected in the surviving remains.

4.2 SCIENTIFIC INVESTIGATION AND EXPERIMENTATION, TO 1805

4.2.1 Natural gas was encountered and utilised in various parts of world at very early dates, but consideration of this is beyond the scope of this study (Williams 1981, 3). In Europe, curiosity about inflammable airs may be traced from the late sixteenth century, with the seventeenth and eighteenth centuries characterised by scientific investigation of the phenomenon and experimentation in its manufacture. This history is described by (amongst others) Elton (1958, 258-63) and Stewart (1958, 5-6). Some of the notable steps are as follows:

- 1688 Rev John Clayton communicated to Royal Soc. that gas could be extracted from a fuel and used as an illuminant.
- 1764 Gabriel Jars suggested using mine gas for lighting
- 1765 James Spedding collected pit gases and used them to light works office at Whitehaven colliery.
- 1770 Coke ovens built at Sulzbach which carbonised coal in closed retorts, from which gas was piped away as waste.
- 1779 George Dixon founded works for extracting tar from coal at Cockfield, Durham.
- 1782 Lavoisier devised forerunner of gasholder.
- 1782 Archibald Cochrane (Lord Dundonald) collected gas from tar ovens at Culross, and experimented with it for lighting.
- 1783 on Jean Pierre Minkellers reputed to have lit his lecture room in Louvain with coal gas.
- 1792 William Murdoch lit his office in Redruth, Cornwall with gas distilled from coal.
- 1797 Pillipe LeBon produced gas from wood in an iron retort (patented in 1799).
- 1802 Murdoch's gas plant used to illuminate Boulton & Watt's Soho factory.

4.2.2 The origin of the gas industry may be seen in the coming together of two strands - an increasing understanding of chemistry and demand for artificial lighting. By the end of the eighteenth century, a reasonable grasp had been attained of the chemistry behind gas manufacture. In addition, the practice of carbonizing coal to produce coke became well established following Abraham Darby's hugely important development of the

coke-smelting of iron in 1709. Prior to the emergence of gaslight, dependence for artificial light was on tallow and wax candles and on oil lamps. The drive for better lighting grew in the late eighteenth century, with increasing numbers of urban streets, public buildings (theatres, assembly rooms, inns, shops) and the needs of developing industry. Increasing numbers of factories, particularly in the textile industry, worked long hours throughout year and wanted safer lighting - the snuffing of candles caused dangerous sparks, and there were many resulting mill fires (Falkus 1981, 218-19).

- 4.2.3 The initial commercial development of the industry may be related to the work of a group of engineers and industrialists (see Elton 1958; Falkus 1981, 220-2; Stewart 1958, 6-9). William Murdoch, an engineer with the firm of Boulton and Watt, began systematic experiments in the production of gas from coal in 1792. Phillipe LeBon worked on gas lighting from the distillation of wood from about the same time. LeBon's work was cut short by his murder in 1804, but importantly provided inspiration for the entrepreneurial pursuits of Fredriech Winzer which formed the beginning of the central-station system. Murdock's work was in part spurred by a sense of competition with LeBon after becoming aware of his work in 1801, but it was also driven by the encouragement of Manchester cotton spinner George Lee (reflecting the textile industry's desperate need for better lighting systems and also the personal contacts of the time - Lee was a major customer of Boulton and Watt and a family friend of the Watt family). By 1802, Murdoch had developed a practical gas plant that was used to illuminate Boulton and Watt's Soho Foundry in Birmingham, and this plant was rapidly developed for commercial sale by Murdoch, aided by his apprentice Samuel Clegg. The first commercial Murdoch installation came in 1805-06, not unsurprisingly at George Lee's cotton mill. At the same time, having left Boulton and Watts employ in 1805, Clegg set up independently and installed his own gas plant at a cotton mill near Halifax run by Henry Lodge, apparently ahead of Murdock (see Elton 1958, 268, Stewart 1958, 8).

4.3 EARLY PRIVATE AND CENTRAL GASWORKS, AND INNOVATION, 1805 - 1820

- 4.3.1 The period to the 1820s saw the establishment of the basic components of gasworks with considerable experimentation and innovation by early gas engineers. It also saw competing systems of private gas plant versus central stations supplying customers through mains. The latter dominated by the end of the period.
- 4.3.2 The making and selling of private plant was pursued by the Boulton & Watt company from 1805 to 1814. This route was also pursued by Samuel Clegg and Josiah Pemberton as independent gas engineers. With one exception this was the plant was sold to industrial concerns (particularly textile mills), predominantly in the North and Midlands. Between 1805 and 1812 gasworks erected in factories in England included following (Elton 1958, 268; Falkus 1981, 224; Stewart 1958, 9).

Boulton & Watt

1805-6	Phillips & Lee cotton mill	Salford
1809	Birley & Co mill	Manchester

1809	Kennedy's mill	Manchester
1809	Wormald, Gott & Co	Leeds
1809	McConnel & Kennedy	Manchester
1809	Gillespie & Co mill	Glasgow
1809	Nielson & Co	Kirkland, Fife
1809	Gott's mill	Leeds
1810	Marshall Hives & Co	Leeds
1810	Birley & Hornby	Chorlton
1810	Lister Ellis & Co	Otley
1810	Coupland & Sons	Leeds
1810	Thomas & Lewis	Manchester
1811	Marshall, Hutton & Co	Shrewsbury
1811	Huddart & Co	Limehouse
1811	Benyon, Benyon & Bage	Shrewsbury

Clegg

1805	Lodges cotton mill	Halifax
1806	Borough Reeve of Manchester (experimental street lighting)	Manchester
1807	Knight factory at Longsight	Manchester
1809	Harris Works	Coventry
1811	factory at Delphinstone	Lancaster
1811	Stonyhurst College (with separate liming plant)	Lancashire
1812	Greenaways cotton mill (with first hydraulic main)	Manchester
1812	Ashton & Sons mill	Hyde
1812	Ashton & Sons mill	Stockport
1812	Ackermann lithographers.	London (Strand)

Pemberton

pre 1807	Saunders Button factory	Birmingham
pre 1807	Spooner park Mill	Birmingham
pre 1807	Cook's brass works	Birmingham
1807	Golden Lane Brewery	London

- 4.3.3 The period also saw numerous innovations (many by Clegg). By 1812, the basic plant included single-ended horizontal cast-iron retorts, a hydraulic main, a tar pit, purification by wet liming plant, and cooling by means of a 'worm' in the gasholder water (Elton 1958, 269). In addition, Reuben Phillips devised a dry lime process in 1817, although this was not commonly used until the 1840s.
- 4.3.4 The central station system aimed to supply customers via street mains and seems to have originated with the German entrepreneur Friederich Winzer (later 'Frederic Winsor'), possibly adopting the idea from the water industry. His interest in gas manufacture was apparently sparked by observation of LeBon's in Paris. Subsequently Winzer chose to attempt a promotion of gas-lighting in London, with its large wealthy market and wide relative costs of coal and oil/tallow. In spite of strong opposition by Boulton & Watt and others, this led to the formation of the Gas Light and Coke Co by charter of 1812 (following a parliamentary act of 1810), permitted to supply gas in London. After its formation, Winsor in fact had a very strained relationship with the company and returned to Paris in 1815. Initial technical problems were overcome following the appointment of Samuel Clegg as its chief engineer late in 1812. Between then and his departure in 1817, Clegg set up the technical infrastructure of the company, with gasworks at St Peter's Street (Westminster), Norton Folgate and Brick Lane.
- 4.3.5 The company consequently had huge financial success, and provided the inspiration and model for companies to follow (see Falkus 1981, 225-31). Between 1814-19 other companies were formed in London. The first gas companies outside London were established in Preston in 1816 with a company of subscribers who engaged London engineer John Grafton, and Liverpool, with a similar set up with another London engineer James Hargreaves (Falkus 1967, 494, 505). By 1820, there were 15 towns in England and Scotland with a gas undertakings, each formed under an act of parliament, which authorised the building of works and the breaking up of streets to lay mains, and specified gas quality and level of dividends. The arrangement generally involved an initial contract with the local authority to supply public lighting at a very cheap rate as a pay-off for being allowed to dig up paving. Profits came instead from supplying private customers.
- 4.3.6 The early gas supplies were for lighting and the mains was turned off in daytime. Interior lighting was initially in non-domestic settings: public houses, shops, warehouses, theatres and public halls. The earliest burners used for this lighting were formed as holes in pipe caps, and were referred to by the shape of flame produced (rat-tail, cockspur, cockscomb). The improvement of using a sawcut rather than holes was led to the batwing burner of 1816 and the similar fishtail burner of 1820. After 1820 an adaptation of the Argand burner (originally devised for oil lighting) came into common use (the adaptation had been made by Clegg in 1809).

4.4 EXPANSION, 1820 - 1850

- 4.4.1 This period saw a huge expansion of the industry. Although some private installations continued to be built, particularly at factories, the bulk of the growth was in terms of companies using central stations to supply non-domestic lighting: for streets, factories,

shops, inns, railway stations, and institutions. The period saw a chronological pattern of new supply to progressively smaller towns. The 1820s saw most gas undertakings established at towns with populations of 10,000 or more; the 1830s towns of 4-10,000, and the 1840s towns of 2,500-4,000, this construction activity matching economic development (see Falkus 1967, 494, 498). The undertakings ranged from large incorporated companies, through smaller non-incorporated companies to numerous small private companies. They all needed technical expertise and this was thus also the heyday of the *contract system* for specialist gas engineers (such as Clegg, the Malam bros, Peckston, Stears and others) and for speculators with interests in wide areas (for example the Barlow brothers and John Gosling).

- 4.4.2 The formation of gas undertakings continued to be by individual act of parliament, although there were occasional general acts, as in the Gasworks Clauses Act of 1847, which codified the terms of operation. By 1830, 200 towns in England and Scotland had gas undertakings formed in this way; by 1849 - there were a least 760 towns. In addition village works were often formed without a statutory basis, and eventually there were about 600 of these small works (Falkus 1967, 500; Stewart 1958, 43).
- 4.4.3 Horizontal cast iron retorts remained the norm in this period, and to c1845, the more or less standard purification plant consisted of a hydraulic main, a foul main, a condenser, a breeze box, and lime washers (Stewart 1958, 23-4). Although the telescopic gasholder was patented by Tait in 1824, the majority of gasholders were single lift.
- 4.4.4 Although the early industry was dominated by coal gas, there was some competition from oil gas companies. In 1815 John Taylor, the mining engineer, obtained a patent for an oil cracking process devised by his brother Philip and established an oil gasworks at Bow in London. Taylor and Martineau also manufactured oil gas plant at a London works and franchised it to companies that set up in whaling areas (Edinburgh, Hull, Bristol, Liverpool and others). In 1824 Taylor and Martineau further attempted to set up an oil gasworks to supply Westminster; which brought strong opposition from coal gas concerns and a public enquiry went against the scheme. Alongside this, in 1819, Gordon and Heard patented a process for compressing oil gas into cylinders, which led to the establishment of the Portable Gas Company of 1825, operated until 1834. This early oil gas industry seems to have failed to overcome technical problems and its higher costs compared to coal gas led to closure of all concerns by 1830 (see Cotterill 1976, 20; Elton 1958, 272; Mills 1995; Nabb 1997; Stewart 1958, 11; Williams 1981, 29-30).
- 4.4.5 Although the gas supply at this time was predominantly for non-domestic lighting, by 1840, there was some domestic lighting in wealthier (ie upper and middle class) homes. This advance followed improvements to the quality of gas together with price reductions, better lamp and burner design and improved ventilation, but mostly by the introduction of metering. The 1820s saw the first use of credit meters on customer's premises (in place of charging by the time for which gas was supplied). By the 1830s, meters were in wide use. Initially these were wet meters; replaced by dry meters from the 1840s, which enhanced domestic popularity (Falkus 1967, 501). The 1840s also saw successful mixing of air with gas to achieve more efficient combustion. The use of

meters combined with the appearance of non-lighting appliance (such as the first gas stoves in the 1830s) also led to mains being kept on through the day.

4.5 ESTABLISHED INDUSTRY, 1850 - 1875

- 4.5.1 After about 1850, the expansion of the industry was mainly the expansion of existing works or the addition of new works for a company to extend its area supply. There was also some new supply to very small settlements and the beginning of amalgamation of companies in bigger towns. Private gasworks for industrial concerns, were also still occasionally installed in this period, where economically viable.
- 4.5.2 The 1860 Metropolis Gas Act gave a monopoly of supply for a given area in London and provided for independent testing of quality, purity and pressure of gas sold. This latter clause was extended to the entire country in the 1871 Gasworks Clauses Act. More formal professionalisation of the industry also began with the formation in 1863 of the British Association of Gas Managers (later the Institution of Gas Engineers).
- 4.5.3 In terms of plant, horizontal clay retorts came into common usage, with self-sealing lids from 1869. Between 1845 and 1870 dry purifiers largely replaced the wet process and washers and scrubbers were improved and widely adopted. The first successful 3-lift telescopic gasholder was built at Blackfriars in 1861, although the majority of small gasworks continued to operate *single lift holders*. Finally, railway sidings to gasworks became common.
- 4.5.4 In 1852 the House of Commons was installed with gas lighting (which remained until 1900). Over the next twenty years, lighting was also brought to many houses and further refinements of domestic and non-domestic burners followed. Sugg and Bray introduced the water-slide chandelier in 1869; Sugg produced Argand burners suitable for use in large spaces such as shops; and Wenham & Sugg developed a regenerative process for powerful lights (as required for lighthouses). Finally, portable oil gas production was revived and used for lighting railway carriages in Germany, in 1871, and in England in 1876, the latter being supplied by Pintsch & Co and Pope & Son.
- 4.5.5 The wider use of gas for non-lighting purposes grew from the 1860s, with more common use of gas cooking and gas engines from the 1870s. This was boosted by the invention of the bunsen burner in 1855, which improved combustion by combined air with the gas. Many cooking appliances were patented between 1850-60, although there adoption was slow, partly due to developing nature of the technology and partly to high costs compared to coal. In 1824 the Aetna iron works (in Liverpool) made gas cookers; in 1841, the chef Alex Soyer began gas coking at the reform Club in London; in the 1860s Wright & Co. and Leoni & Co sold small cooking and heating appliances; and from 1869, the Crystal Palace District Gas Co began renting out cookers and stoves. Heating appliances were also developed, if slower than for cooking. In 1849 Edwards invented pumice balls; in 1851 Smith and Phillips devised an imitation coal fire; in 1852 Goddard devised asbestos fibre; 1859 saw the invention of the firebrick back; and 1877 the radiant fire with woven wire. In addition, water heaters were being made from 1850, and the first water geyser (by Maugham)

appeared in 1868 and was subsequently improved by others. These new products were readily promoted and in 1879 there was an exhibition of gas appliances in Leeds.

- 4.5.6 A further important development was the invention of the gas engine by Lenoir in 1866. The subsequent development of the Otto cycle for gas engines in 1876 led to the commercial success of the gas engine, with many being produced by the Crossley brothers of Manchester.

4.6 EXPANSION, MODERNISATION, MUNICIPALISATION AND ELECTRICITY, 1875 - 1920

- 4.6.1 The period 1875-1920 saw considerable growth of the industry, with gas consumption trebling. It was characterised by a significant expansion of non-lighting uses, partly spurred by competition with electricity from the 1880s, further technological developments (including a move to vertical retorts, improved condensing and purifying techniques, and greater mechanisation), the expansion and modernisation of gasworks, and widespread municipalisation in the North and the Midlands.
- 4.6.2 The first municipal gas undertaking was formed in 1843 by the Manchester Corporation. However this was a rarity until the late nineteenth century. Although the 1872 Borough Funds Act prevented municipal undertakings from supplying to an area already covered by a statutory company, the 1875 Public Health Act empowered local authorities to purchase local undertaking and by 1882, 148 municipal undertakings had been formed. This had risen to 306 in 1912, mainly in Lancashire, Yorkshire and the Midlands (Williams 1981, 27-8, 43). However this was still less than half the number of private companies. In London, several companies amalgamated. In 1870 the Gas Light & Coke Co merged with the Great Central Co and the City of London Company. In 1876, the Imperial Company merged with the Equitable, the Western and the Victoria Docks companies (Williams 1981, 27).
- 4.6.3 There were several major technical advances in this period. Inclined retorts were introduced in the 1880s, followed by vertical retorts in the early 1900s, resulting in tall **retort houses**, with characteristic wall ventilation. Carburetted water gas plant was also introduced, at the Beckton works in 1890. Between 1870-1920 the standard sequence of purification plant was: condensers, exhauster, Livesey (or similar) washer, tower scrubber or rotary washer, and dry purifier (with iron oxide and/or lime). The 1905 Act relieved London Companies of the need to remove organic sulphur and this was gradually extended throughout the country. The 1880s and 1890s were also the time when telescopic gasholder construction reached its peak under engineers such as George Livesey. This included the first 4-lift holder at East Greenwich in 1886 and the first use of the flying lift. In addition the spiral holder was invented (in 1888).
- 4.6.4 The period 1890-1910 saw a major extension of gas supplies into working class homes. This was a product of several factors and was done in the face of severe competition from the new electricity industry. The gas industry was able to compete with the electricity industry in providing domestic and street lighting (until c1930) very largely due to the introduction of the incandescent gas mantle, which came into general use, in its more efficient inverted form, from about 1900. It evolved out of a long line of developments from the 1860s on, based on the principle of using gas

combustion to cause a solid body to glow rather than depending on illumination of the gas itself, and culminating in the Welsbach lamp of 1887. The penny-in-the-slot meter was introduced in 1889 (by Thorp & Marsh); and from 1893 this was a cornerstone in the expansion into working class homes (Stewart 1958, 46). Domestic increases were also due to the wide adoption of heating and cooking appliances, partly spurred by competition with electricity and partly due to the availability of better designs (Falkus 1967, 495). These designs included the Leoni gas fire of 1882, Fletcher's 'Africa' gas fire (a metal basket with fireclay balls) of 1890, Fletcher's improved water geyser in 1890, Pottertons water heater of 1904, a gas fire with columnar radiants in 1905, a gas fire with grid radiants in 1925, and the Ascot water heater in 1932. Industrial use also grew. From 1880, Fletcher and others developed gas for small industrial uses (muffle furnaces, metal working, glue boiling, etc); and during the First World War, there was increased use for furnace-firing.

- 4.6.5 The period also saw several important institutions formed: the Gas Companies Protection Association in 1898, the Incorporated Institution of Gas Engineers (IGE) in 1903, (by amalgamation of conflicting institutions), the Society of British Gas Industries in 1905 (to represent makers of plant and apparatus), the British Commercial Gas Association in 1912 (a publicity agency for industry), and the National Gas Council of Great Britain and Ireland in 1916. From 1907, methodical research was carried out under the umbrella of the IGE and the major gas companies (Williams, 1981, 22).
- 4.6.6 The adoption of the incandescent gas mantle and the steady move to non-lighting functions also brought about a gradual move from the illuminating standard to a thermal standard as the basis for charging customers, and the 1916 Gas Act empowered undertakings to choose to switch to the thermal standard.

4.7 RESTRAINED RATIONALISATION, 1920 - 1949

- 4.7.1 The 1920 Gas Regulation Act obliged all statutory undertakings to adopt the thermal standard. It also allowed gas undertakings to buy gas from each other (Williams 1981, 44, 59). The industry at this point was in the hands of numerous different undertakings, a set-up which now came to be regarded as a 'fragmentary' arrangement for what was now a fundamental utility industry. In 1920 there were at least 1300 gas undertakings, of which 780 statutory undertakings provided the bulk of the supply. Changed economics and electricity competition forced some smaller undertakings to be absorbed by large ones, such that the number of statutory undertakings reporting to Board of Trade reduced from 798 in 1920 to 716 in 1935 (for example the GL&C absorbed a further 6 companies between 1922 and 1935). More important was 'Holding Company' movement of the 1930s which saw 242 undertakings enter into joint operation under 18 umbrella companies (covering 9% of gas production). By 1936, half of the gas supplied came from 20 undertakings, of which the biggest was the Gas Light and Coke Company. In addition the institutions representing the industry underwent some re-organisation. In 1919 the Federation of Gas Employers was formed; in 1934 British Gas Federation was set up to represent five existing bodies; and in 1939 the Gas Research Board was set up under the IGE and the Society of British Gas Industries, to conduct co-operative research for industry.

- 4.7.2 The purchase of coke oven gas produced in relation to the iron and steel industry, was effectively restricted to neighbouring undertakings. The possibility of building networks for extending this were examined by a Board of Trade Departmental Committee, which decided it was only feasible in South Yorkshire and in 1931, the Sheffield Gas Co was given permission to build a high pressure grid (which cut prices by 30%).
- 4.7.3 By the 1930s, continuous vertical retorts were well established, being in use at 250 of the 450 largest undertakings, and accounting for about 60% of the gas made. Carburetted water gas generation on many large sites was an important means of dealing with daily demand fluctuation. The first dry holders (to German designs) were built in 1927. Further extension of urban and rural systems led to the gas-main mileage rising from 39,000 miles in 1920 to 69,000 miles in 1945 (Williams 1981, 57-67).
- 4.7.4 By-products remained important. The British Sulphate of Ammonia Federation was set up in 1920 to negotiate on behalf of gas companies and the National Benzole Company was set up in 1919 for similar purpose. Coal-tar was important as the continuing basis of an expanding organic chemical industry, as well as being used for re-surfacing roads, treating roofs and timbers. Finally the domestic sales of coke rose with improved designs of coke boilers.
- 4.7.5 At this time 60-70% of gas sales were domestic, with 90% of these used in heating and cooking. Domestic lighting lost out to electricity, although public lighting remained important to the late 1930s (until then about half of street lighting was by gas, representing about 5% of the gas made). Commercial and industrial use consumed roughly equal amounts (Williams 1981, 69).
- 4.7.6 The Second World War resulted in damage to many works, and was a period of repairs, with some new gas plant and some producer gas plant installed. There was also the adaptation of a small proportion of plant to produce hydrogen for barrage balloons (Williams 1981, 81-8).

4.8 NATIONALISATION, 1949 - 1967

- 4.8.1 Nationalisation of the gas industry had been a policy of the Labour party since before the war. The 1948 Gas Act followed nationalisation of the coal industry in 1945, the railways in 1947, and the electricity industry in 1948, and followed the model of the Electricity Act (Elliott 1980, 13-14, Stewart, 1958, 44, Williams 1981, 103-20). A total of 1,050 works were brought under 12 autonomous Area Gas Boards (10 England, 1 Scotland, 1 Wales). The Act excluded 35 'ancillary gas undertakings' which generated gas for their own purposes, this included 13 undertakings that were already nationalised - 6 owned by the Coal Board and 7 by the Transport Commission. Coke ovens (of the coal board and the steel industry - nationalised in 1949) were also excluded.
- 4.8.2 The Gas Council was also formed 'to promote and assist the efficient exercise and performance by the Area Boards of their functions'. It had a London headquarters and

- had 14 members of Council, made up of the 12 Area Board Chairmen (hence very powerful men within the industry), together with its own chairman and vice chairman.
- 4.8.3 The product of nationalisation was a further concentration of generation into larger works, together with the laying of a grid mains. The number of gasworks was reduced from 1,050 in 1949 to 536 in 1958, and the gas mains was extended from 77,000 miles in 1950/1 to 90,000 in 1956/7. The bulk of the gas came from this nationalised industries gasworks, although 14% was purchased from coking industry, and a small amount from oil refineries. There was also some transported butane gas to remote rural areas, and *methane gas drainage*, for example at Whitehaven where the gasworks was closed in favour of this.
- 4.8.4 Gasworks employed coal gas supplemented by carburetted water gas for demand fluctuations. However the increasing scarcity of suitable coking coals combined with large increases in coal prices prompted the nationalised gas industry to explore moves away from coal (Williams 1981, 122-9). Research was directed specifically at the complete gasification of low grade coal; the gasification of oil, and the importation of liquefied natural gas (see below). Four research centres were established: Watson House (originally set up by the GL&C Co in 1926, adjacent to Nine Elms Works in London), the London Research Station (also set up by GL&C Co, in 1928 at Fulham), the Midlands Research Station (1950s, Solihull), and the Engineering Research Station (in 1964 at Killingworth, Newcastle-upon-Tyne).
- 4.8.5 Lurgi plant for the complete gasification of coal was built at Westfield, Scotland in 1958-60, and at Coleshill, Birmingham (closed in 1969). However, much wider adoption was made of oil gas processes developed by the research labs. The catalytic rich gas (CRG) process was first used at Bromley-by-Bow works; and the gas recycle hydrogenation (GRH) process was first built at Avomouth, Bristol in 1965.
- 4.8.6 Nationalised gas usage in the 1950s divided as follows: domestic, 51%; industrial, 29%; commercial, 15%; public, 5%. One notable feature was the heavy promotion of central heating in the 1960s. By products again remained important, with yearly sales as below (Stewart 1958, 48):
- coke 11 million tons
 - coke breeze 1.7 million tons
 - tar 370 million gallons
 - ammonia products 250,000 tons
 - sulphur 125,000 tons
 - benzole 29 million gallons

4.9 NATURAL GAS, 1967 - 1986

- 4.9.1 Conversion to natural gas between 1967 and 1977 resulted in the elimination of early equipment and traditional gas works in Britain (see Elliott 1980, 1-12; Williams 1981, 139-223; Wilson 1974). The Gas Council was pursuing the idea of natural gas from the early 1950s, when it examined the American industry (by 1950 90% of the

American gas supply was natural gas) and became involved in exploration. This led in 1959, to the first delivery of liquid methane (using American-developed technology) to the Canvey Island **shore terminal**, in Essex. In 1961, liquid methane was imported from the Sahara (Hassi R'Mel Oasis), and the Canvey Island terminal was expanded (with a new jetty and storage tanks) to cope. This storage capacity was increased further in 1966, such that imported natural gas was providing 10% of the British supply. Although the gas was too rich to be used directly in existing town gas burners, it could be blended with the town gas supplies. A *high pressure main* built from Canvey Island to Leeds allowed this blending, via spurs to eight of the twelve Area Boards.

- 4.9.2 A series of developments made it possible for the gas industry to consider total conversion to natural gas. First, in the 1950s, Britain established oil and gas rights over the western half of the North Sea (by the 1958 'Convention of the Seas' in Geneva, ratified in 1964). Then, in 1959, the discovery of the Groningen Gas Field in Holland waters spurred exploration and in 1965, BP established the *West Sole Field*.
- 4.9.3 A major problem with conversion was that natural gas could not be used by existing appliances. Natural gas has twice the calorific value (or heating content) of manufactured gas so that it requires twice the amount of air mixed with it at the burner in order to burn. It was therefore necessary either to convert the natural gas, or to convert the appliances. The Gas Council chose the latter option as being cheaper in the long term. A trial conversion run was made in Canvey in 1965 (near the terminal) and the final decision to go for conversion was taken by the Gas Council in 1966. The Conversion Executive was set up, as a department of the Gas Council, to oversee it and the Conversion Programme proper began at Burton-on-Trent in the summer of 1967, reaching completion in 1977 (Elliott 1980, 13-14).
- 4.9.4 A new **shore terminal** was built at Easington, Humberside in 1967 to serve the *West Sole Field*; and a new 24-inch main was built to connect this to the Canvey Island-Leeds main at Totley, near Sheffield. In 1966-7 three fields were discovered off the Norfolk coast - *Hewett*, *Leman Bank* and *Indefatigable*; this resulted in a **shore terminal** at Bacton in 1967-8. The *Viking field* became operational in 1972 (by the NCB and Conoco), with its **shore terminal** at Theddlethorpe. The *Rough Field* was discovered in 1968, although only developed after 1973, and was linked to the Easington terminal in 1975. In Scotland, the St Fergus terminal opened in 1975/6 in relation to the *Frigg Field*. Finally in 1985, a terminal was opened at Barrow to serve the *South Morecambe field*. Hand-in-hand with construction of the new terminals, was a major extension of the high pressure distribution grid, what became termed the *National Transmission System*, which was greatly extended beyond the Canvey Island-Leeds pipeline, from 320 miles in 1966 to 3047 miles in 1978-9 (Williams 1981, 225-30).
- 4.9.5 Conversion to natural gas also resulted in a major business restructuring, with the twelve area boards and the Gas Council being brought together as the 'British Gas Corporation' on 1 Jan 1973 (from the Gas Act of 1972).

4.10 PRIVATISATION, 1986 ON

4.10.1 Re-privatisation of the gas industry came about in 1986, with the formation of 'British Gas'. The privatisation act also set up the regulatory body OFGAS. Subsequent re-organisations have followed and the industry is currently in the process of demergering, with two separate parent companies formed in 1997: 'BG plc', which includes 'TransCo' who operate the pipeline and storage system throughout Great Britain; and 'Centrica plc', whose core business is that of supplying gas to customers. In part this re-organisation is in relation to an ongoing process of re-introducing supply competition within industry. (commenced in the South West in 1996).

4.10.2 The companies making up the demerged parent groups are as follows:

BG plc:

- *TransCo* - operates Britain's pipeline
- *BG Storage* - operates gas storage system
- *British Gas International Exploration and Production* - gas and oil exploration and production
- *British Gas International Downstream* - international gas transportation, distribution and power generation
- *Properties* - management of Group's property portfolio
- *Research & Technology* - for the Group and others.

Centrica plc:

- *British Gas Trading* - markets gas supplies
- *HRL Ltd* (Morecambe) - manages/operates Morecambe gas fields (opened in 1985) in Irish Sea (subsidiary of British Gas Trading)
- *British Gas Services* - installation, repairs and servicing of domestic gas systems and appliances.
- *Energy Centres* - retailing of gas and electric appliances.

5. ARCHITECTURAL CONSIDERATIONS

- 5.1 The buildings and structures of the gas industry are touched upon in general architectural history texts, having a particular relevance to Victorian industrial architecture (Jones 1985, 69-72, 131, Miele 1996, Pevsner volumes). There have been a range of influences on gas industry architecture at different dates which should be catered for in the MPP selection process. These include the functional nature of the industry and its need to operate efficiently, its continually increasing scale of production and therefore prominence in urban landscapes, design variation to accommodate changing technologies (notably from horizontal to vertical retorts), the effect of available building materials and structural technology of the day, and the effect of the organisation and ownership of the industry at different dates.
- 5.2 Whilst larger companies and works could afford grander architectural statements, even the smallest gasworks were designed with some aesthetic consideration, and several components were subject to special architectural treatment (reflected in the 58 buildings and structures associated with the gas industry which currently hold listed building status - EH pers comm).
- 5.3 **Retort house** designs varied from very plain to the very ornate, in accommodating the change from early low profile buildings housing horizontal retorts to later tall buildings for vertical retort technology, with many stations employing classical features. Early noted classical compositions included the Hoxton gasworks, by Francis Edwards in 1823, Canon's Marsh gasworks, in 1819 and the Kendal gasworks, in 1825. The monumental Beckton works of 1869-70, by F R Evans and V Wyatt and built by Sir John Aird, employed classical brick facades for its vertical retort houses, with terracotta detailing for the wall ventilation, the interiors using elliptical-arch iron roofs supported by cast iron columns.
- 5.4 An early practice of the industry was to enclose gasholders within **gasholder houses**, which were an obvious opportunity for architectural embellishment. A pattern of twin octagonal towers flanking the entrance and offices, with the retort house to the rear, seems to have been used on many sites and is notably represented by the surviving example dated to 1822 in Warwick, with its 'restrained Palladian style'. Similarly, prominent components such as the **manager's house**, the **office** and **gateway** were usually given aesthetic consideration. Even **station meters** could be of ornate design (for example the Bromley Works meter of 1876 - see Williams 1981, 20).
- 5.5 Innovative engineering design was used in both **retort house** construction and in the **gasholder**. An example of the former is the exceptional cast and wrought iron roof structure of the 1822 Birmingham gasworks (Williams & Donald 1993). Examples of the latter are the functional cast iron tripod supports of the Fulham no 2 gasholder of 1827-30, and, more noticeably, the extraordinary iron guide frame designs for telescopic **gasholders** in the late nineteenth-century, as seen in the 1880s St Pancras group, one of the most prominent elements of Victorian engineering architecture (Miele 1996).

6. REGIONALITY

- 6.1 The gas industry has an essentially national and international setting in terms of the development of its technology, so regional variation is less pronounced than for other industries. Nevertheless, some discussion of 'region' is important as the organisation and application of that technology, prior to nationalisation, did have some regional variation.
- 6.2 The nature of the early industry in providing lighting, meant that gas production was concentrated on towns and industrial areas. Beyond this the very early industry saw a division between private supplies (particularly in the North and the Midlands) and central stations (initially in London). To a certain extent this division lasted until the First World War. For the central station system, there was a further division between large statutory undertakings serving towns and the many small undertakings for small towns and villages (with markedly different scale of plant and production). Within this the importance and scale of the London Companies stood out. Municipal undertakings played a smaller role than was the case with the electricity industry. The Manchester municipal undertaking of the 1840s was an important early exception and the 1871 Act did lead to the emergence of a significant Municipal element to the industry (accounting for about one third of the statutory undertakings), again concentrated in the North and the Midlands.

7. COMPONENTS

Surviving **components** are grouped into three classes. Components are listed alphabetically within each class. Terms used are defined for MPP purposes, but have been chosen in an attempt to reflect the terminology used in the industry. The general importance of each component in isolation is given; the importance of a particular example depending on its date, condition and typological/regional variation. Plant is especially important within the electricity industry and major items have been included in the list. They are distinguished from structure and feature components by the use of *italics*. Early plant, as a general rule, rarely survives other than as museum pieces, and therefore *in situ* examples are rated high. The value of any component containing original or notable plant would be enhanced over and above the ratings given here.

7.1 GASWORKS

- 7.1.1 This term is used to cover any site associated with the production of manufactured gas irrespective of the fuel used or the use to which the gas is put.

RAW MATERIALS AND TRANSPORT

<u>Canal</u>	An artificial cut for the transportation of materials by water. Only included where specifically part of a gasworks.
Date range:	1800s
Importance:	Individually low.
<u>Coal handling plant</u>	Plant for conveying coal from <u>coal store</u> to <u>retort house</u> .
Date range:	MC19 - 1960s
Importance:	Early examples are high.
<u>Coal jetty</u>	River or canal berthing for receiving coal deliveries from ships and barges.
Date range:	1800 - present.
Importance:	Early examples are high.
<u>Coal store</u>	Area (yard or building) for storage of coal.
Date range:	1800 - 1960s
Importance:	Individually low.
<u>Coke handling plant</u>	Plant for conveying coke from <u>retort house</u> to <u>coke store</u> .
Date range:	MC19 - 1960s
Importance:	Early examples are high.
<u>Coke store</u>	Area (yard or building) for storage of coke.
Date range:	1800 - 1960s
Importance:	Individually low.

<u>Lime shed</u>	Covered shed for storing lime prior to use in <u>purifiers</u> .
Date range:	1840s - 1960s
Importance:	Individually low.
<u>Oxide shed</u>	Covered shed for storing iron oxide during revivifying process and prior to use in purifiers
Date range:	1840s - 1960s
Importance:	Individually low.
<u>Railway sidings</u>	Part of iron rail system used to bring fuel to a gasworks.
Date range:	Used in relation to gasworks from 1840s - present.
Importance:	Low individual importance, unless as part of early site.
<u>Refuse lime heap</u>	Covered shed or open yard for storing spent lime.
Date range:	1800s - 1960s
Importance:	Individually low.
<u>Weighbridge</u>	Plant for weighing incoming fuel. may be located on railway tracks or roadway.
Date range:	1800s - present.
Importance:	Early examples are moderate.
CARBONIZATION	
<u>Foul main</u>	Pipework which carried and cooled the gas on the way from the hydraulic main to the first of various purification plant.
Date range:	1811 - 1960s
Importance:	Any surviving examples important.
<u>Hydraulic main</u>	A large closed trough half filled with water, into which gas rose from each retort via an <i>ascension pipe</i> .
Date range:	1811 - 1960s
Importance:	Any surviving examples important.
<u>Producer gas plant</u>	Plant for manufacturing producer gas (used to fuel retort furnaces) by passing air over red hot coke. Devised 1861 by Siemens and subsequently adopted on large gasworks.
Date range:	1861 - 1960s.
Importance:	Any surviving examples important.
<u>Retort bench</u>	Bank of <i>retorts</i> and <i>furnace</i> . Several retorts heated by the same furnace were known as an <i>oven</i> . The pattern of retorts and furnaces was known as the <i>setting</i> .
Date range:	1800s - present. Essential development from <i>horizontal cast iron retort</i> to the <i>fireclay retort</i> of the mid-nineteenth century to <i>inclined</i> and <i>vertical retorts</i> of the late nineteenth and early twentieth centuries.
Importance:	Any surviving examples important.

Retort house Core of a gasworks, housing the **retort bench** and incorporating a *chimney* for the *furnace* exhaust. Early *horizontal retorts*, meant characteristically low profiles, later *vertical retorts* saw tall buildings with characteristic wall ventilation.

Date range: 1800s - 1960s.
Importance: Any surviving examples important, particularly with surviving plant.

Tar tower Pipework for conveying tar condensed out in the **foul main** to a **tar well**.

Date range: 1811 - 1960s
Importance: Any surviving examples important.

GASIFICATION

Carburetted water gas plant - used to generate *carburetted water gas*, a mixture of gases from two processes - *water gas* from passing steam over hot coke, and *oil gas* from cracking of oil on hot coke or brick.

Date range: 1890s - 1960s.
Importance: Any surviving examples important.

PURIFICATION

Benzole plant Plant for removing Benzole from town gas, used from the first world war, either by washing with gas oil or by passing gas through chambers with carbon pellets.

Date range: 1914 - 1960s
Importance: Any surviving examples important.

Condenser Device for condensing tar and ammonia out of town gas, devised by Murdoch, with numerous subsequent designs, particularly after 1860.

Date range: 1800s - 1960s
Importance: Any surviving examples important.

Cyanogen plant Plant for removing Cyanogen from town gas, employed on some large sites between 1885 and 1922, the liquor being of use in printing and dyeing.

Date range: 1885 - 1922
Importance: Any surviving examples important.

Electro-detarrers Plant for de-tarring town gas, introduced in the twentieth century, placed after the condenser.

Date range: C20
Importance: Any surviving examples important.

- Gas drying plant** Plant for reducing water vapour in town gas, so reducing problem of water deposition in mains, from 1930.
 Date range: 1930 - 1960s
 Importance: Any surviving examples important.
- Lime washers** Plant for purifying town gas using *wet process*.
 Date range: 1805 - MC19
 Importance: Any surviving examples important.
- Liquor tank** Pit for collecting ammoniacal liquor condensed out of the gas.
 Date range: 1800s - 1960s
 Importance: Individually low.
- Naphthalene plant** Plant for removing naphthalene from town gas, from c1912.
 Date range: 1912 - 1960s
 Importance: Any surviving examples important.
- Purifier** Plant for dry purification of town gas, a large cast iron box, holding trays of dry lime or iron oxide, always in groups with piping and *valves* to control the cycle of use of the boxes. From 1921 some sites used reinforced concrete instead of cast iron.
 Date range: 1817 - 1960s
 Importance: Any surviving examples important.
- Rotary washer** Device to remove the ammonia from town gas, devised by Hills in 1848, sprayed water onto brushwood in a rotating cylinder.
 Date range: 1848 - 1960s
 Importance: Any surviving examples important.
- Tar pit** Pit for collecting tar that had been condensed out of town gas.
 Date range: 1800s - 1960s
 Importance: Individually low.
- Tower scrubber** Device to remove the ammonia from town gas, devised by George Lowe in 1846, employed shelving and a water spray from the summit of the tower. Improved by Mann and Walker in 1871.
 Date range: 1846 - 1960s
 Importance: Any surviving examples important.
- Tower purifier** Device to remove Hydrogen sulphide from town gas, introduced from Germany in 1930, utilised trays operated by crane, and became popular for large sites.
 Date range: 1930 - 1960s
 Importance: Any surviving examples important.

- Washer** Device to remove tar from town gas. devised by Wilson in 1817; consisted of a gas-tight box in which gas was passed through perforated wooden boards running with water. Improved by Cathels (1868). Livesey (1870) and Walker (1872).
Date range: 1817 - 1960s
Importance: Any surviving examples important.
- PUMPING
- Electric pump** Type of exhauster.
Date range: C20
Importance: Any surviving examples important.
- Engine house** Building housing prime mover, with *boiler* and *chimney*, used on gasworks in relation to exhauster and booster.
Date range: EC19 - 1960s
Importance: Any surviving examples important.
- Exhauster** Pump for drawing town gas through purifying processes, devised by Broadmeadow in 1825, but only widespread from 1850s. Many developments Small *governor* alongside controlled 'pull'.
Date range: 1825 - 1960s
Importance: Any surviving examples important.
- Exhauster house** Building housing exhauster
Date range: EC19 - 1960s
Importance: Any surviving examples important.
- Gas engine** Prime mover based on internal combustion, drove exhauster, usually with line shafting
Date range: LC19 - 1960s
Importance: Any surviving examples important.
- Power house** Building housing electric power generating plant.
Date range: C20.
Importance: Any surviving examples important.
- Steam engine** Prime mover used to drive exhauster, common practice was for each pump to be driven by its own steam engine, but line shafting was also employed.
Date range: EC19 - 1960s
Importance: Any surviving examples important.
- Steam turbine** Prime mover used to drive exhauster.
Date range: EC20 - 1960s
Importance: Any surviving examples important.

STORAGE

- Gasholder** Structures used to store gas (town gas, waste gas or natural gas). Specific type is important (*single lift, telescopic, cable-guided, spirally guided, dry, or pressure*).
- Date range: 1800s - present.
- Importance: Good examples of the different types will be high. Otherwise moderate.
- Gasholder house** Building housing gasholder, commonly used in early industry.
- Date range: EC19.
- Importance: Any examples likely to be important.

METERING AND PRESSURE

- Meter house** Building housing station meter and station governor (latter could be located in **valve house**)
- Date range: EC19 - 1960s.
- Importance: Any examples likely to be important.
- Station governor** Device for maintaining constant pressure into the gas mains.
- Date range: 1815 - 1960s.
- Importance: Any examples likely to be important.
- Station meter** Device to allow town gas production to be monitored.
- Date range: 1817 - 1960s.
- Importance: Any examples likely to be important.
- Valve house** Building housing valves controlling gas flow into and out of **gasholders**, may also house **station governor**.
- Date range: EC19 - 1960s
- Importance: Any examples likely to be important.

ADMINISTRATION

- Administrative block** Staff offices, canteen toilet etc. of a gasworks.
- Date range: LC19 - present.
- Importance: Low technological importance, but may be significant as part of a site.
- Boundary wall** Property marker around a gasworks compound.
- Date range: EC19 - present
- Importance: Moderate within complete sites.
- Car park** Motor vehicle parking area for gasworks employees and visitors.
- Date range: C20.
- Importance: Low, unless part of complete site.

<u>Entrance gate</u>	Entranceway to gasworks compound.
Date range:	EC - present.
Importance:	Moderate within complete sites.
<u>Gas showroom</u>	Building forming retail outlet for gas appliances.
Date range:	C19 - 1960s.
Importance:	Moderate within complete sites.
<u>Laboratory</u>	For period to c1805 a place for experimentation concerning the nature and use of gas. Subsequently a component of a gasworks where on-site tests and checks could be made.
Date range:	C18 - present.
Importance:	Any examples of experimentation laboratories are high. Gasworks laboratories vary.
<u>Manager's house</u>	Accommodation for gasworks manager/engineer
Date range:	C19 - EC20.
Importance:	Moderate within complete sites.
<u>Office</u>	Building used for administrative purposes.
Date range:	C19 - present.
Importance:	Moderate except as part of complete site.
<u>Smithy</u>	Building housing blacksmith's workshop for running repairs
Date range:	EC19 - 1960s.
Importance:	Moderate within complete sites.
<u>Stable</u>	Building for horses.
Date range:	EC19 - C20.
Importance:	Moderate within complete sites.
<u>Stores</u>	Area for storage.
Date range:	1800s - present.
Importance:	Moderate within complete sites.
<u>Workshops</u>	Area for carrying out on-site repairs.
Date range:	1800s - present
Importance:	Moderate within complete sites.

7.2 DISTRIBUTION

- 7.2.1 This term is used to cover any site associated with the distribution of gas, irrespective of scale or system.

Boosters Pumps to boost pressure at times of low gasholder levels or during heavy demand. Situated in a **booster house** driven

	either by steam, gas engine or electric motor. Turbine-driven fan-type boosters common in twentieth century.
Date range:	C19 to present.
Importance:	<i>In situ</i> example high.
<u>Booster house</u>	Housed <i>boosters</i> . Located at <u>gasworks</u> or <u>gasholder stations</u> .
Date range:	C19 to present.
Importance:	Potentially high.
<u>Gasholder stations</u>	Located to maintain even pressure in <u>mains</u> . Receive gas via <i>medium pressure network</i> and feed into <i>low pressure network</i> via <i>governors</i> .
Date range:	C19 to present.
Importance:	Potentially high.
<u>Mains</u>	Pipework for transmitting gas over distances. May be part of <i>Low, Medium or High pressure network</i> . Material of manufacture should be noted.
Date range:	1800 to present.
Importance:	Isolated examples low; may be high if associated with surviving gasworks.

7.3 NATURAL GAS INSTALLATION

7.3.1 This term is used to cover any site associated with the refining of natural gas.

<u>Shore terminal</u>	Alternatively known as <i>beach</i> or <i>reception terminal</i> . Large complex site where natural gas is brought in by tanker or pipeline refined and stored before being passed into the transmission system refined.
Date range:	C20
Importance:	In terms of the MPP it is the terminal as a whole that is of interest.

7.4 ADMINISTRATIVE SITE

7.4.1 This term is used to cover any site associated with the central administration of gas supply, by gas company, municipal authority or nationalised industry.

<u>Company office</u>	Building used for administrative purposes of a gas undertaking.
Date range:	1880s on.
Importance:	Early examples may be high. Later examples depends on historical associations and architectural considerations.
<u>Gas showroom</u>	Building or rooms used by a gas undertaking to present information about its services to the public.

Date range: C20
Importance: Early examples may be high. Later examples depends on historical associations and architectural considerations.

8. SOURCES OF INFORMATION

The bibliography has been arranged to reflect the varying types of sources described in this section. Contacts and consultees for compiling the step 2 shortlist are given as an appendix. Whilst it is not possible to be comprehensive within the time limits of a study such as this, it is hoped that the material described gives a representative picture of the available sources.

8.1 PUBLISHED WORKS

- 8.1.1 There is a very considerable, but widely distributed literature for the gas industry, and this material tends to focus on technological and business history with less on field remains. Several general textbooks include sections on gas, and give a useful introduction to the subject. These include Bracegirdle (1973), Cossons (1987), and Elton (1958). Specific histories include Chandler (1947), Chandler and Lacy (1949), Everard (1949), and Williams (1981). Trinder (1992) includes many useful entries relating to the industry (including Biggar, coal gas, Fakenham, gas, gas engine, gasholder, gasworks, town gas, natural gas, producer gas, Warwick, and water gas). The more recent history and the conversion to natural gas is covered by Elliot (1980), Williams (1981, 1982, 30-35), and Wilson (1974). Cotterill (1976) has given a summary of the Scottish industry (and Hassan 1978 has discussed its development in relation to the coal and oil industries). Possibly the most useful historical and technical accounts are those of Stewart (1958) and Wilson (1976). A good, simple explanation of the technical side of the industry is the Gas Council's undated 'Notes for Teachers on Gas'. Architectural and historic studies include Chantler (1939), Chick (1995), Falkus (1967 & 1982), Jones (1985, 69-72, 139), Matthews (1985, 1986 & 1988), and Millward & Ward (1991), together with entries in the many volumes in the Pevsner 'Buildings of England' series.
- 8.1.2 Many aspects of the industry, whilst dealt with in general works, are also covered by more specific studies. These include: anon (1849), on gas meters, Sturt (1980) on gas holders, and Watkins (1978) on engines and pumps. Works which focus on the history of gas lighting include Gledhill (1981) and O'Dea (1958). The lives and work of individual engineers and industrialists are examined by, for example, Mills (1989) on Livesey; Clow (1941) on Dundonald; Stewart (1962) on Clegg; Cullen (1943), McCash (1966) and Griffiths (1992) on Murdoch; and Miele (1996, 15) on Aird. Gas in relation to other industries is also covered by Kelley (1986) and Mott (1936), on wood gasification; Mott (1936) & Trinder (1992 coke entry), on the coking industry; and Campbell (1971) and Gardner (1915) on the coal tar and chemical industry.
- 8.1.3 A further useful recent source is the *Historic Gas Times*, produced since 1994 as the newsletter of the IGE's Panel for the History of the Gas Industry.

8.2 REGIONAL WORKS

- 8.2.1 The series of *Bibliographies of Industrial Archaeology and Industrial History* by Greenwood (1985, 1987, 1988, 1990) provide the quickest inroad to what had, by the

date of each volume, been published for North England (1985), the Midlands (1987), London (1988), and the South East (1990).

- 8.2.2 Regional and local histories are numerous, those encountered from the literature search are given in the bibliography. Whilst possibly unfair to highlight particular examples, a notable group is the series of booklets on Midlands undertakings by Roberts (1975 to 1983). Historical accounts are distinguished from the many accounts of local industries included in the industrial archaeology guides published by David & Charles and others.
- 8.2.3 Libraries with useful collections of secondary material include: the Science Museum in London, the Birmingham reference Library, ICE library, IGE library.

8.3 CONTEMPORARY WORKS

- 8.3.1 A large number of works have been written by gas industry practitioners. These constitute a valuable group of historical sources, and frequently contain information about specific sites. Some of the more obvious early general works including anon (1842), Accum (1819), Clegg (1841), Jones & Clegg (1847), Meade (1934), Newbigging (1870), Newbigging & Fewtrell (1878), Peckston (1819), Rees (1819-20, available as Cossons 1972); and Woodall (1908). A useful index to early published works is Chester (1892). The PEP (1939) report is also a valuable source on the history of the industry and in particular its condition in the inter-war period. More modern general textbooks are those of Anderson (1984), and BP (1972 & 1977).
- 8.3.2 Various academic and trade journals contain a great deal of useful historical information, much of it with regard to specific sites. These journals include: *The Builder*, *Engineer*, *Engineering*, *Gas Engineer's Compendium* (from 1924), *Gas World* (from 1884), *The Illuminating Engineer*, *Journal of Gas Lighting* (from 1849, later renamed the *Gas Journal*), *Mechanics Magazine*, *Philosophical Transactions of the Royal Society*, and *Transactions of the Institute of Gas Engineers*.
- 8.3.3 A further, very important source are the centenary publications produced by many gas undertakings, and available at the BG archives office at Partington and in local record offices.

8.4 PRIMARY RECORDS AND LIBRARY COLLECTIONS

- 8.4.1 The National Gas Archive, at Partington in Manchester, is the central company archive for BG plc. formed in 1995 it includes corporate records of BG plc and its predecessors, together with records of former Regions of the nationalised industry (excluding Southern and West Midlands) and the individual gas undertakings absorbed by nationalisation. In addition a great deal of material is held in local record offices especially for the pre 1945 industry; for example in the 1960s all minute books which survived into nationalisation were deposited with Record Offices in East & West Sussex, Surrey, Kent and London (Sturt pers comm). For archives relating to London and for sites in London see Sturt (1989) and Stewart (1957).

- 8.4.2 The Institution of Gas Engineers library also has an important collection of published works and primary records. The origins of the IGE are the 1863 formation of the British Association of Gas Managers. In 1881 this association change its name to the Incorporated Gas Institute; at the same time a conflict between members led to the formation of the separate Institution of Gas Engineers. These two bodies were reunited in 1903 as the Incorporated Institution of Gas Engineers, becoming the Chartered Institution of Gas Engineers in 1929 (Williams 1981, 45, 66).
- 8.4.3 Other gas industry bodies are listed below. Historical material in relation to these bodies has not been investigated.
- Gas Companies Protection Association, formed in 1898.
 - Society of British Gas Industries, formed in 1905 (to represent makers of plant and apparatus)
 - British Commercial Gas Association formed in 1912 (a publicity agency for industry)
 - National Gas Council of Great Britain and Ireland, formed in 1916.
 - Federation of Gas Employers was formed, formed in 1919
 - British Gas Federation was set up to represent five existing bodies, formed in 1934
 - Gas Research Board, formed in 1939 (under the IGE and the Society of British Gas Industries, to conduct co-operative research for industry).
- 8.4.4 Other important sources for the industry are: the Boulton and Watt collection at Birmingham Reference Library; numerous British Patents; Parliamentary select committee reports; and the records of gas plant manufacturers, for example those of Newton Chambers & Co of Sheffield, who sold plant all over the country, have been highlighted by the work of Falkus (1967, 495).

8.5 MUSEUMS, MUSEUM COLLECTIONS AND HISTORICAL SOCIETIES

- 8.5.1 In England, there are museums in former gasworks buildings at Fakenham Gas Works in Norfolk (a hugely important and more or less complete small gasworks of the mid-nineteenth century), Leicester Gas Museum (mainly displaying appliances) and Bromley by Bow (currently closed to public). In Scotland there is a preserved gasworks at Biggar, Lanarkshire. Other important collections are held by the Science Museum in London, Manchester Museum of Science and Industry (Gas Gallery); and the Leeds Gas Heritage Collection at Tingley)
- 8.5.2 IGE's Panel for the History of the Gas Industry, with wide contacts for history of the industry. Gas Industry genealogical Index being compiled by members David Loveseed and Terry Mitchell. Society has also proposed compilation of a Gasworks Index, currently underway. Gas Historical Societies exist for the North West, South West and Wales.

8.6 SOURCES FOR STEP 2 DATA AND CONSULTATION

- 8.6.1 The following categories of source material should be consulted in compiling a step 2 shortlist: published works suggesting historically important sites; published works covering specific sites (including Pevsner volumes, and local industrial archaeology guides such as those published by the AIA, David & Charles, and others); archaeological databases (the NMR and SMR, English Heritage's listed buildings database and Scheduled Monuments databases, PHEW, and the AIA's IRIS database); correspondents (to include the IGE and its Panel for the History of the Gas Industry, the several gas historical societies, AIA societies and identified individuals beyond the constant list of consultees). The latter are given in the address list.
- 8.6.2 During the course of the step 1 work, a questionnaire was circulated to County Sites and Monuments Records and National Park Officers and to AIA affiliated societies. All responses were helpful and the majority gave useful information. All expressed willingness to provide further information for the step 2 work. The *RCHME* Threatened Buildings Section (Swindon Office) recorded the Birmingham Gas Street works: recording work by the section is ongoing and is the responsibility of Mike Williams. Dr Peter Wakelin (Cadw) and Dr Miles Oglethorpe (RCAHMS) should be consulted for comparative information in Wales and Scotland.

9. PRIORITIES AND RECOMMENDATIONS

9.1 IMPORTANCE

- 9.1.1 The history of the gas industry in England is a topic of international importance in terms both of scientific and technological development and in social and economic history. Any remains of Britain's industry for the period up to the conversion to natural gas in the 1960s have the potential to contribute to our knowledge of these fields and are therefore of significance. For example, the very early industry was dominated by technological developments taking place in England and the British gas industry of the nineteenth century is a classic example of the balances struck between 'laissez faire' and public controls, both through legislation and later by municipalisation. In addition, the late nineteenth century saw the building of gasworks that gave grandiose displays of Victorian industrial architecture. The period of, and after, conversion to natural gas is of lesser technological importance, although the fact of this change and the establishment of the National Transmission System obviously had national significance. The nationalised industry, and in particular the natural gas industry, was dominated by increases of scale and efficiency, and sites of this era would be difficult to preserve.
- 9.1.2 The essence of a gasworks is its plant, little of which will survive in the field. However, this report has specifically attempted to summarise the technical complexities of gasworks as they developed through the history of the industry, on the basis that a sound understanding of process must lie behind assessment of the archaeological worth of surviving fabric.

9.2 RARITY

- 9.2.1 The level of survival of town gasworks is low, largely because the conversion to natural gas led to their redundancy and steady dismantling. The museums at Fakenham and Biggar are exceptional survivals. However, as demonstrated in Birmingham in 1993-4, substantial remains may still be identified (Demidowicz 1993 and LUAU 1994b).
- 9.2.2 Currently there are three gas industry sites in England with Scheduled Monument status. The Fakenham gasworks in Norfolk is a typical compact small gasworks dating from 1852. The Shaw Lodge Mills gas plant in West Yorkshire was a private gas plant for a textile mill, dating from 1860-90. The Lavenham gasworks site in Suffolk retains an 1862 iron gasholder, but there are no remains of the retort house or other features. In addition to this there are 58 buildings and structures associated with the gas industry which currently hold listed building status. These include the Warwick gasholder house of 1822, and seven other gasholder sites such as the Fulham no 2 holder of c1830 and the St Pancras gasholders of the 1880s. The Birmingham Gas Street retort house of 1822 is listed, as are elements of the Canons Marsh gasworks in Bristol (possibly dating to the 1870s), and a range of other structures.

9.3 RECOMMENDATIONS

9.3.1 The following general criteria should be applied in selecting sites for protection:

- The aim should be a balanced sample of sites covering the chronological, regional, and typological range of the industry.
- Sites may be important as representing technical advances and, equally, as demonstrating common practices.
- In general terms, gasworks are sufficiently rare that any above-ground remains are likely to be of archaeological importance. It is unlikely that further complete sites survive to any level approaching their original condition. Plant in particular is unlikely to survive. As such, whilst complete sites would be of major significance, the reasonable survival of portions of gasworks will also be significant.
- Where buildings have survived, they should be assessed in terms of their architectural merit, the potential for archaeological investigation of standing fabric, and the potential survival of buried remains. Both standing fabric and buried remains may contain evidence for the particular utilisation of gas technology on a given site, over and above information available from documentary sources.
- The survival of gasholders is generally a consequence of their re-use value for the natural gas industry. Their significance will depend on their technological and architectural value.
- Distribution sites will generally be underground and virtually impossible to identify without ground disturbance. Museum preservation of a representative sample of the types of piping used is likely to be the most practical conservation policy, and should be combined with archaeological recording through the planning system for any remains that are encountered.
- The Natural Gas industry is dominated by large scale plant, extensive pipelines and storage facilities. A policy of seeking the preservation *in situ* of elements of this post-1967 industry is unlikely to be either practical or desirable. It is recommended however that a policy should be pursued of carrying out selective recording and the preservation of documentary records.

9.3.2 Finally, in view of the nature of the purification processes used on town gasworks, and the presence of toxic metals and compounds associated with them, it is likely that land contamination will be a major factor in considerations of their conservation.

BIBLIOGRAPHY

GENERAL

- | | | | |
|---|-------|---|--|
| Bracegirdle, B | 1973 | <i>The Archaeology of the Industrial Revolution</i> | London: Heinemann |
| Brockman, H A N | 1974 | <i>The British Architect in Industry 1841-1940</i> | London: George Allen & Unwin Ltd |
| Buchanan, R A | 1982 | <i>Industrial Archaeology in Britain</i> | Penguin |
| Bucknell, L H | 1935 | <i>Industrial Architecture</i> | London: Studio |
| Butt, J | 1967 | <i>The Industrial Archaeology of Scotland</i> | |
| Butt, J | 1967 | <i>Industrial Archaeology in the British Isles</i> | |
| Butt, J &
Donnachie, I | 1979 | <i>IA in the British Isles</i> | |
| Cossons, N | 1987 | <i>The BP Book of Industrial Archaeology</i> | Newton Abbot: David & Charles |
| Demidowicz, T | 1993 | <i>Early Gasworks, Gas Street/Berkley Street,
City Centre Birmingham</i> | Birmingham City Council ms report |
| DoE | 1990 | <i>Planning Policy Guidance: Archaeology and
Planning (PPG16)</i> | HMSO |
| English Heritage | 1992 | <i>Monuments Protection Programme: The
Evaluation and Selection of Industrial
Monuments for Statutory Protection</i> | MS paper by Archaeology Division,
dated March 1992. |
| Fakenham Town
Gasworks Museum
Trust | nd | <i>Making Town gas: a short guide to the
Fakenham Gas Works</i> | (site guide) |
| Gledhill, D &
Daniel, P | 1994 | 'Wedmore Gasworks' | <i>Bull Somerset I.A.S.</i> 66, 2-9 (Aug 1994). |
| Gould, S &
Cranstone, D | 1992 | <i>Monuments Protection Programme: The Coal Industry, Step 1 report</i> | London: English Heritage ms. |
| Gregory, R | 1994 | <i>The Other Beverley</i> | |
| Hay, G D & Snell,
G P | 1986 | <i>Monuments of Industry: an illustrated
historical record</i> | pp176-80 - Inveraray Gasworks, Argyll |
| Hughes, S | 1992 | 'The Welsh IA Panel' | in Briggs 1992 |
| Jones, E | 1985 | <i>Industrial Architecture in Britain</i> | London: Batsford |
| LUAU | 1994a | <i>Monuments Protection Programme: Electric
Power Generation Step 1 Report</i> | unpubl client rep |
| LUAU | 1994b | <i>Gas Street/Berkley Street Gasworks,
Birmingham</i> | unpubl client rep |
| Miele, C | 1996 | <i>Gasholders nos 8, 10, 11 and 12, St Pancras
Station, Battle Bridge Road and Goods Way
(London Borough of Camden)</i> | Historical Analysis and Recording
Team, English Heritage internal
document |
| Raistrick, A | 1973 | <i>Industrial Archaeology</i> | London: Granada Publishing |
| RCHME & English
Heritage | 1992 | <i>Thesaurus of Archaeological Site Types</i> | London |
| Riley, R C | 1969 | The Retort houses of Hilsa Gasworks,
Portsmouth | <i>J Portsmouth Coll Tech Ind Archaeol
Soc.</i> no 2, 3-11 |
| Trinder, B | 1981 | <i>The Industrial Revolution in Shropshire</i> | London: Phillimore |
| Trinder, B | 1982 | <i>The Making of the Industrial Landscape</i> | London: Dent & Sons. |

- | | | | |
|-------------------------|------|--|--------------------------------------|
| Trinder, B (ed) | 1992 | <i>The Blackwell Encyclopedia of Industrial Archaeology</i> | Oxford: Blackwell |
| Whittick, A | 1974 | <i>European Architecture in the twentieth century</i> | Aylesbury: Leonard Hill Books |
| Williams, M & Donald, A | 1993 | <i>Former Gasworks Retort House, Gas Street, Birmingham, West Midlands</i> | RCHME Historic Building Report (ms). |
| Williams, M & Stoyel, A | 1993 | <i>Buildings to South West of Retort House, Gas Street/Berkley Street, Birmingham, West Midlands</i> | RCHME Historic Building Report (ms). |

BIBLIOGRAPHIES

- | | | | |
|--------------|------|--|--------------------------|
| Chester, W R | 1892 | <i>Bibliography of Coal Gas</i> | Nottingham |
| Greenwood, J | 1985 | <i>The Industrial Archaeology and Industrial History of North England</i> | Open University |
| Greenwood, J | 1987 | <i>The Industrial Archaeology and Industrial History of the English Midlands</i> | Cranfield: Kewdale Press |
| Greenwood, J | 1988 | <i>The Industrial Archaeology and Industrial History of London</i> | Cranfield: Kewdale Press |
| Greenwood, J | 1990 | <i>The Industrial Archaeology and Industrial History of South East England</i> | Cranfield: Kewdale Press |

INDUSTRY JOURNALS

- Engineer*
Engineering
Gas Engineer's Compendium
Gas Journal (continuation of Journal of Gas Lighting)
Gas World
Journal of Gas Lighting
Journal of the Society of Chemical Industry
Mechanics Magazine
Penny Magazine
Philosophical Transactions of the Royal Society
The Builder
The Illuminating Engineer
Trans Inst of Gas Engineers

REGIONAL HISTORIES

- | | | | |
|------------|------|--|--|
| anon | 1946 | <i>Hartlepool Gas and Water Company: 100 years of progress 1846-1946</i> | |
| anon | 1970 | <i>Natural Gas and Black Country Industry</i> | <i>Blackcountryman</i> III.3. 35-39 |
| Abram, W A | 1878 | <i>History of the Blackburn Gas-light Company</i> | |
| Awty, B G | 1974 | <i>The Introduction of Gas-Lighting to Preston</i> | <i>Trans Hist Soc of Lancs and Chesh.</i> cxxv. 82-188 |

- | | | | |
|-----------------------------|------|--|--|
| Brown, P A | 1956 | Some geographical aspects of gas production in the East Midlands | <i>E Mids Geogr.</i> I, no 5, 22-28 |
| Butler, D | 1982 | The gas works of Sherburn Hopital 1867-1920 | <i>Durham Cty Loc Hist Soc Bull.</i> 29, 30-44. |
| City of Manchester Gas Dept | 1949 | <i>143 years of Gas in Manchester</i> | |
| Clark, A | 1969 | Lincoln Gas Light and Coke Co Ltd | <i>Lincs Ind Archaeol.</i> iv, no 3, 43-46. |
| Clegg, J | 1872 | <i>The Bolton Gas Company, 1818-1872: an historical perspective</i> | |
| Co Borough of Salford | 1920 | <i>The Salford Gas Undertaking</i> | |
| Cotterill, M S | 1976 | <i>The Scottish Gas Industry Up to 1914</i> | PhD thesis. Univ of Strathclyde |
| Cotterill, M S | 1981 | The Development of Scottish Gas Technology. 1817-1914: inspiration and motivation | <i>Ind Arch Rev.</i> 5 |
| Crew, K | 1982 | The 'Well and Proper Lighting' of Halesowen Streets by gas | <i>Blackcountryman.</i> xv, no 4, 21-22. |
| Davenport, B J | 1948 | <i>The history and development of the Manchester Gas Undertaking: a case study in municipal trading</i> | MA thesis. Manchester University |
| Davies, P | 1996 | All Change at St Pancras | <i>Conservation Bulletin.</i> 30, 12-13 |
| Demont, J A | 1969 | 'The Introduction of North Sea gas into the East Midlands' | <i>East Midlands Geogr.</i> iv, 1966/69, 379-86 |
| Dimmock, D J & Wilding, R J | nd | <i>Smethwick Gas Works (a brief history, 1855-1949)</i> | Tipton: Black Country Soc. Studies in Ind Archaeol. no 4, 30pp |
| Eastwood, K | 1988 | <i>Preston Gas Light Co: a story of faith and determination</i> | Paper presented to the Manchester District Junior Gas Association |
| Everard, S | 1949 | <i>The History of the Gas Light & Coke Company, 1812-1949</i> | London: Ernest Benn. 428pp |
| Foster, D | 1973 | The gas industry, the tube trade and the Fosters | <i>Blackcountryman.</i> vi, no 4, 36-40 |
| Friends of the Earth | 1991 | <i>Gas Works in London - an investigation into contaminated land</i> | FoE: author Sean Humber, researcher Sally Beave |
| Gibson, M A | 1927 | The early days of coal gas as an illuminant | <i>Trans Lancs Chesh Antiq Soc.</i> xliv, 37-40 |
| Golisti, K | 1984 | <i>The Gas Adventure and Industry in NEGas, 1802-1949</i> | Paper presented to NEGas, Bradford |
| Hacking, B | | <i>The Municipalisation of Bolton Gas Co, 1818-1872</i> | Howard Greenfield Archive (Partington), see Wilson 1991 |
| Hales, I | 1983 | 'Gas comes to Maidstone' | <i>Bygone Kent.</i> iv/5, 283-4. |
| Hanmer, J & Winterbottom, D | 1991 | <i>The book of Glossop</i> | |
| Hardie, D W F | 1950 | <i>A History of the Chemical Industry in Widnes</i> | |
| Harris, S A | 1956 | <i>The Development of Gas on North Merseyside, 1815-1949: a historical survey of the former gas undertakings of Liverpool, Southport, Prescot, Ormskirk and Skelmersdale</i> | Liverpool: North-Western Gas Board |
| Hartland, G L J | 1969 | 'Gas making in Banbury' | <i>Cake and Cockhorse.</i> iv/4, 47-53 (also <i>CBA Group 9 Bull.</i> no 8, 9-12). |

Hassan, J A	1978	Relationships between Coal, Gas and Oil Production : a nineteenth-century Scottish case study	<i>Industrial Archaeology Review</i> , 2/3, 277-89
Hemingway, G Y	1977	<i>The Newark Gas Company</i>	typescript (Nottingham Public Library)
Hereward, C	1977	'Fakenham Gas Works'	<i>Cambridge Soc Ind Archaeol Newsl</i> , ix/3, 5-6.
Holmes, W C & Co Ltd	1950	<i>The story of one hundred years of endeavor in the service of the gas industry, 1850-1950</i>	The Firm, 64p
Hunt, J R	1958	The Widnes Gas and Water Co	<i>Trans Hist Soc Lancs and Chesh</i> , 110
Hunter, M & Thorne, R (ed)	1990	<i>Change at King's Cross: from 1800 to the present</i>	London: Historical Publications
Laycock, J	1925	<i>A century of gas lighting in Keighley: a short historical sketch, AD1825-1925</i>	91p
Lockwood, A	1980	The Origins of Gas in Leeds: the Leeds Gas Light Company, 1817-35	<i>Thoresby Soc Pubs</i> , xvii, 114-36
Longden	1988	<i>The Industrial Revolution in East Cheshire</i>	
Matthews, D	1983	<i>The London Gasworks: a technical, commercial and labour history to 1914</i>	PhD thesis, Hull Univ
Middleton, A S	1973	The Gas Industry in Newcastle upon Tyne	<i>Tyne Ind Archaeol Group Newsletter</i> , no 9, Nov 1973, 1-4
Middleton, K	1970	'General Living Conditions in Lincoln 1840-1914'	<i>Lines Ind Archaeol</i> , 5/3, 44-5
Mills, M	1988	The gasworkers of South London	<i>S London Record</i> , no 3, 6-18
Millward, R & Robinson, A	1971	'South-East England: Thameside & the Weald'	in <i>Landscapes of Britain</i>
Nabb, H	1986	<i>A History of the Gas Industry in the South West of England before 1949</i>	Bath PhD
Nabb, H	1987	The Bristol Gas Industry 1815-1949	<i>Bristol Branch of the Historical Association, Local History Pamphlets no 67</i> .
Nabb, H	1993	The Bristol Gas Light Company: the Breillat Dynasty of Engineers	<i>Bristol Branch of the Historical Association, Local History Pamphlets no 83</i> .
Nixon, E	nd	<i>The Derby Gas Light & Coke Company, 1820-1949</i>	British Gas east Midlands
Paterson, J	1877	<i>Brief Sketch of the History of Gas-Lighting in Warrington</i>	
Pattenden, D W	1979	'The Waste Heat and Gas Electricity Generating Stations Limited'	<i>Papers presented to the 7th IEE weekend meeting</i> , 53-71.
Pearson, A	1988	The Coal Gas Industry at Falmouth, 1819-1866	<i>Journal of the Trevithick Society</i> , 15, 43-52
Roberts, D E	1975	Controversies on Lighting in Nottingham	<i>Local Historian</i> , xi, 327-30
Roberts, D E	1976	<i>The Nottingham Gas-Light and Coke Company, 1818-1874</i>	MA, Loughborough University.
Roberts, D E	1978	<i>The Leicester Gas Undertaking, 1821-1921</i>	Leicester: EM Gas, 50p
Roberts, D E	1979	<i>The Sheffield Gas Undertaking, 1818-1949</i>	Leicester: EM Gas, 48p
Roberts, D E	1980	<i>The Nottingham Gas Undertaking, 1818-1949</i>	Leicester: EM Gas, 50p

Roberts, D E	1981	Source material relating to the gas industry in the East Midlands	<i>Bus Archives no 47</i> , 31-43
Roberts, D E	1981	<i>The Lincoln Gas Undertaking, 1828-1949</i>	Leicester: EM Gas, 46pp
Roberts, D E	1983	<i>The Grimshy Gas Undertaking, 1836-1949</i>	Leicester: EM Gas, 38pp
Roberts, D E & Frisby, J H	1980	<i>The Northampton Gas Undertaking, 1823-1949</i>	Leicester: East Midlands Gas
Stafford, D P J	1992	'St Audries gasworks'	<i>Bull SIAS</i> , 59, 12-14
Thompson, S		<i>The Municipalisation of Bolton Gas Co</i>	
Thornhill, R	1969	Bakewell Gas	<i>Derbys Misc</i> , v, no 1, 28-31
Ward, C	1988	<i>A History of the Hull Gas Supply Industry</i>	Hull Local History Archives Unit, 73p
Wilson, G B L	1976	The Small Country Gasworks	<i>Trans Newcomen Soc</i> xlvi, 33-43
Wilson, J F	1991 a	Ownership, Management and Strategy in Early North West Gas Companies, 1815-1830	<i>Business History</i> , xxxiii
Wilson, J F	1991 c	<i>Lighting the Town: a study of management in the north-west gas industry, 1805-1880</i>	
Wilson, J F	1991 b	Competition in the Early Gas Industry: the case of Chester Gas-Light Co. 1817-1856	<i>Trans Lancs and Chesh Antiq Soc</i> , 86
Woodford, L W	1966	The founding of the Sleaford Gas Light Company 1838-1839	<i>Lincs Loc Hist Soc Ind Archaeol Group Newsl</i> , no 4, 2-3
Wrench, D	1973	The Gas Works, Stone	<i>J Staffs Ind Archaeol Soc</i> , iv, 18-19
Wright, N R	1972	Gas Works in Lincolnshire	<i>Lincs Ind Archaeol</i> , vii, no 3, 36-45
York Gas Co	1924	<i>The centenary of gas lighting in York</i>	35p

INDUSTRY HISTORY

anon	1849	History of Gas Meters	<i>Journal of Gas lighting</i> , 10 Oct 1849
Bennett, A S	1983	<i>Dolphinholme 1811 - a historical investigation into the manufacture and supply of gas in Dolphinholme between 1811 and 1867</i>	MS report to British Gas.
Brownlie, D	1923	The early history of the coal-gas process	<i>Trans Newcomen Soc</i> , iii 1922-23, 57-68.
Campbell, W A	1971	<i>The Chemical Industry</i>	Longmans
Chandler, D	1947	<i>Outline of History of Lighting by Gas</i>	London: privately printed, 279pp
Chandler, D & Lacy, A D	1949	<i>The Rise of the Gas Industry in Britain</i>	British Gas Council
Chantler, P	1939	<i>British Gas Industry: an economic study</i>	
Chick, M	1995	British Business History: a review of the periodical literature for 1993	<i>Business History</i> , 38/1, 2
City of Carlisle gas Undertaking	1922	<i>Rome Street Gas Works. Official Inauguration, Oct 6th 1922</i>	
City of Coventry Gas Department	1923	<i>Foleshill Gasworks: official innauguration of the second section and vertical retort installation, Oct 1923</i>	

- | | | | |
|----------------------------|------|---|--|
| Clow, A & N I | 1952 | <i>The Chemical Revolution: a contribution to social technology</i> | Batchworth |
| Clow, A & N I. | 1941 | 'Lord Dundonald' | <i>Econ Hist Rev.</i> xii, 47-58 |
| Creighton, H | 1824 | Gas Lights | <i>Encyclopaedia Britannica - supplement to the 4th 5th and 6th edns.</i> Edinburgh, vol iv. |
| Cullen, W | 1943 | William Murdoch | <i>Chem Ind.</i> lxii, no 22, 201-203 |
| Downie, R A | 1939 | 'William Murdoch' | <i>Blackwoods Magazine.</i> 245, 266-74 |
| East Midlands Gas Board | 1954 | <i>Visit of the Institution of Gas Engineers (Midland Section) to Basford Gasworks, Fri 25 June 1954.</i> | |
| Edwards, K C | 1959 | The underground gasification of coal in England | <i>E. Midlands Geogr.</i> II, no 11, 30-36 |
| Elliott, C | 1980 | <i>The History of Natural Gas Conversion in Great Britain</i> | Cambridge Information and Research Services Ltd |
| Elton, Sir A | 1958 | 'Gas for Light and Heat' | in <i>Singer, C A History of Technology</i> , vol iv. Oxford: Clarendon Press. |
| Falkus, M E | 1967 | The British Gas Industry before 1850 | <i>Econ Hist Rev.</i> sec ser. xx, 491-508 |
| Falkus, M E | 1982 | The early development of the British Gas Industry, 1790-1815 | <i>Econ Hist Rev.</i> sec ser. xxxiii |
| Gardner, W | 1915 | <i>The British Coal Tar Industry</i> | London |
| Gas Council | nd | <i>Notes for Teachers on Gas</i> | London: Gas Council |
| Gledhill, D | 1981 | <i>Gas Lighting</i> | Shire Album 65 |
| Gledhill, D | 1995 | Gas engines and water wheels in Somerset Power Stations | <i>Bull SIAS</i> 70, Dec 1995, 2-8 |
| Griffiths, J | 1992 | <i>The Third Man</i> | Deutsch |
| Haber, L F | 1958 | <i>The Chemical Industry during the nineteenth century</i> | OUP |
| Haber, L F | 1971 | <i>The Chemical Industry 1900-1930</i> | OUP |
| Hardie, D W F & Pratt, J D | 1966 | <i>A History of the Modern British Chemical Industry</i> | Pergamon |
| Hunt, C | 1907 | <i>A History of the Introduction of Gas Lighting</i> | |
| Kelley, D W | 1986 | <i>Charcoal and Charcoal Burning</i> | Shire Publications (Shire Album 159). |
| Liberty, W J | 1913 | The Century of Gas Lighting and Its Historical Development | <i>The Illuminating Engineer</i> |
| Livesey, G | 1902 | A Talk on the Development of Gasholders | <i>Proceedings of the Incorporated Institution of Gas Engineers.</i> 162-79 |
| Mathews, W | 1832 | <i>An Historical Sketch on the Origin, Progress and Present State of Gas-Lighting</i> | London: Hunter. 434pp |
| Matthews, D | 1985 | Rogues, Speculators and Competing Monopolies: the early London Gas Companies | <i>London Journal.</i> xi, no 1, 39-50 |
| Matthews, D | 1986 | Laissez-faire and the London Gas Industry in the Nineteenth century: another look | <i>Econ Hist Rev.</i> sec ser. xxxix, no 2, 244-63 |
| Matthews, D | 1988 | Profit sharing in the gas industry, 1889-1949 | <i>Business History.</i> xxx/3, 306 |

McCash, J A	1966	William Murdoch - faithful servant	in <i>Engineering heritage: highlights from the history of mechanical engineering</i> , v2. Heinemann for the Institution of Mechanical Engineers, 50-55.
Miall, S	1931	<i>History of the British Chemical Industry</i>	Benn
Millichip, M	1994	<i>Gas Light and Steam</i>	British Gas, London Gas Museum
Mills, M	1989	'George Livesey'	<i>London's Industrial Archaeology</i> : no 4, 41-48
Millward, R	1986	<i>The Emergence of Gas and Water Monopolies in nineteenth-century Britain: why public ownership?</i>	Salford Papers in Economics, 86-4
Millward, R & Ward, R	1991	From private to public ownership of gas undertakings in England and Wales, 1851-1947: chronology, incidence and causes	<i>Working Papers in Economic and Social History, University of Manchester</i> , no 1; and <i>Business History</i> , 35/3, 1-21
Morgan, G T & Pratt, D D	1938	<i>The British Chemical Industry, its rise and development</i>	London: Edward Arnold
Mott, R A	1936	<i>History of Coke Making</i>	Cambridge: Heffer for Coke Oven Manager's Association
Multhauf, R P	1984	<i>The History of Chemical Technology</i>	Garland Publishing
Nabb, H	1997	History of Oil Gas	in <i>Engineers and Engineering</i> , Oxford: Drake International.
Nabb, H	1997	Oil Gas	<i>Historic Gas Times</i> , 12, 3
Newbigging, T	1901	<i>A Century of Gas Lighting</i>	
North Thames Gas Board	0	<i>Fulham Station</i>	
O'Dea, W T	1958	<i>The Social History of Lighting</i>	Routledge
Political and Economic Planning	1947	<i>The British Fuel and Power Industries</i>	London: PEP
Rowlinson, P J	1984	<i>Regulation of the gas Industry in the early-nineteenth century, 1800-1860</i>	Oxford PhD
Russell, C A & Goodman, D C	1972	<i>Science and the Rise of Industry since 1800</i>	Bristol: J Wright
Singer, C et al	1958	<i>A History of Technology</i>	Oxford: Clarendon Press
Singer, C: Holmyard E J; Hall, A R & Williams T I	1958	<i>A History of Technology, vols 4 & 5</i>	Clarendon Press: Oxford
Smith, N	1945	<i>Gas Manufacture and Utilization</i>	London: British Gas Council
Smith, R N & Lefevre, N	1932	<i>Domestic Utilisation of Gas</i>	
Stewart, E G	1957	<i>Historic Index of Gasworks Past and Present in the area now served by the North Thames Gas Board, 1806-1957</i>	London: the Board, 127pp
Stewart, E G	1958	<i>Town Gas: its manufacture and distribution</i>	London: HMSO for Science Museum
Stewart, E G	1962	<i>Samuel Clegg, 1781-1861: his life, work and family</i>	
Sturt, B	1980	'Low Pressure Gas Storage'	<i>London's Industrial Archaeology (GLIAS journal)</i> , no 2, 13-23.

Sturt, N F	1989	<i>A bibliography of archives relating to gas works in the Gas Light and Coke Co from 1812 to 1949</i>	
Taylor, F S	1957	<i>A History of the Chemical Industry</i>	Heinemann, 2 vols
Terrance, J		The Gas Industry	in <i>Terrace's Notebook for Gas Engineers and Students</i>
Timmins, S	1894	'William Murdock'	<i>Trans Birm & Mid Inst Archaeol Sect</i> , xx/113, 1-9
Tomlin, D	1996	'Gas Works of Cleveland'	<i>Cleveland History</i> , no 71.
Watkins, G	1978	<i>The Steam Engine in Industry - 1: the public services</i>	Ashbourne: Moorland Publishing
West Midlands Gas Board	1953	<i>The New Swan Village Gas Works</i> (inaugural pamphlet)	
Williams, T I	1981	<i>A History of the British Gas Industry</i>	OUP
Williams, T I	1982	<i>A Short History of Twentieth-Century Technology, c1900-c1950</i>	Oxford: Clarendon Press.
Wilson, D S	1974	<i>North Sea Heritage: the story of Britain's Natural Gas</i>	British Gas.

INDUSTRY TEXTBOOKS

anon	1842	A day at the Westminster Gasworks	<i>Penny Magazine</i> , 26 Feb. 1842, 81-88
anon	1851	Gas Apparatus and the Exhibition	<i>Expositor</i> , 1, 275
anon	1890	Gasholders Without External Framework	<i>Gas World</i> , 25 January 1890
anon	1927	'Bolton Municipal Gas, Water and Electricity Undertakings'.	in <i>Industrial Bolton, the Crompton Centenary Supplement to the Textile Manufacturer</i> , 75-77.
Accum, F	1815	<i>A Practical Treatise on Gas Light</i>	
Accum, F	1819	<i>Description of the Process of Manufacturing Coal gas for the Lighting of Streets, Houses and Public Buildings now Employed at the Gas Works in London</i>	Thomas Boyes
Anderson, R O	1984	<i>Fundamentals of the Petroleum Industry</i>	London: Weidenfield & Nicolson
Andrews, L & Porter, R	1909	The Use of Large Gas Engines for Generating Electric Power	<i>JIEE</i> 49, 3 on.
Board of Trade	1900	Returns relating to all authorised gas undertakings in the United Kingdom belonging to local authorities.	Published in <i>Parliamentary Papers</i> , 16 vols (1900-21).
BP	1972	<i>Gas Making and Natural Gas</i>	London: British Petroleum
BP	1977	<i>Our Industry: Petroleum</i> .	British Petroleum Company Ltd
Christison, R	1825	Comparative Advantages of Oil and Coal Gas	<i>Annals of Philosophy</i> , x, 190-3
Clegg, S	1820	<i>Description of an Apparatus by which Twenty Five Cubic Feet of Gas are obtained from each Cauldron of Coal</i>	London
Clegg, S	1841	<i>A Practical Treatise on the Manufacture and Distribution of Coal-Gas</i>	London: John Weale

Cochrane, A	1785	<i>An account of the qualities and uses of coal ar and coal varnish, with certificates from ship-masters and others.</i>	
Coe, A	1934	<i>The Science and Practice of Gas Supply</i>	Halifax: Gas College, 3 vols.
Colburn, Z	1865	<i>The Gasworks of London</i>	London: E & F Spon
Cossons, N	1972	<i>Rees' Manufacturing Industry 1819-20</i>	David & Charles reprint
Crane, R T	1893	The Early History of Wrought Iron Gas Pipe	<i>Gas World</i> , 28 Oct 1893
Davidson, W B	1923	<i>Gas Manufacture</i>	London: Longmans Green
Herring, W H	1893	<i>The Construction of Gasworks Practically Described</i>	London: Hazell, Watson & Viney
Hodgson, R B	1927	The Romance of the Gasholder	<i>Gas Journal</i> , 23 Nov 1927, 547-53
Holland, E T & Boardman, F H	1983	Guide to the Operation and Maintenance of Low Pressure Gasholders	<i>Gas Engineering and Maintenance</i> , March 1983, 101-27.
Hornby, J	1913	<i>A textbook of Gas Manufacture for Students</i>	
Hughes, S	1875	<i>A Treatise on Gas Works</i>	5th edn
Jones & Clegg (Surveying Officers)	1847	Observations or General report on the Existing System of Lighting Towns with Gas	<i>British Parliamentary Papers</i> , xxii, 95 local acts - Preliminary Inquiries 9 & 10 Vict c106.
King, W B	1879	<i>Treatise and on the Science and Practice of the Manufacture and Distribution of Coal Gas</i>	London
Mathews, W	1832	<i>A Compendium of Gas Lighting</i>	
Meade, A	1934	<i>The New Modern Gasworks practice</i>	London: Eyre & Spottiswood
Muspratt, S	1850	<i>Chemistry, Theoretical, Practical and Analytical, as applied and related to the Arts and Manufactures</i>	William McKenzie, various edns 1850s-1870s
Newbigging, T	1870	<i>The Gas Manager's Handbook</i>	1st edn
Newbigging, T & Fewtrell, W T (eds)	1878	<i>King's Treatise on the Science and Practice of the Manufacture and Distribution of Gas</i>	London: King
Newbigging, T & W	1899	<i>The Principals and Practice of the Valuation of Gas, Electricity and Water Works for Assessment Purposes</i>	2nd edn
O'Dea, W T	1967	<i>Lighting 2: gas, mineral, electricity</i>	HMSO.
Peckston, T S	1819	The Theory and Practice of Gas-Lighting	London
Peebles, W C	1912	Gas Governors	<i>North British Association of Gas Managers Handbook</i>
Popplewell, F	1911	Seasonal Fluctuations in Employment in the Gas Industry	<i>Journal of the Royal Stastical Society</i> , 1910-11
Richards, W	1877	<i>A Practical Treatise on the Manufacture and Distribution of Coal Gas</i>	London: E & F Spon
Rutter, J O N	1833	<i>Practical Observations on Gas Lighting</i>	
Rutter, J O N	1849	<i>Gas Lighting - its progress and prospects</i>	
Sharp, J	1850	<i>Practical Advantages attending the use of Coal Gas</i>	Southampton
Stelfox, J	1894	Experience with Carburetted Water Gas	<i>Gas World</i> , 21 July 1894
Taylor, G L	1848	<i>On Gas Works</i>	RIBA

Terrance, J	1948	<i>Terrance's Notebook for Gas Engineers and Students</i>	
Trueman, A E	1954	<i>The Coalfields of Britain</i>	Arnold
Wilson, A F	1864	Manufacture of Coal Gas	<i>Society of Gas Engineers, Transactions</i>
Woodall, W H	1908	Continuous Carbonization in Vertical Retorts	<i>Journal of Gas Lighting</i> , 19 May 1908

APPENDIX 1 - ILLUSTRATIONS


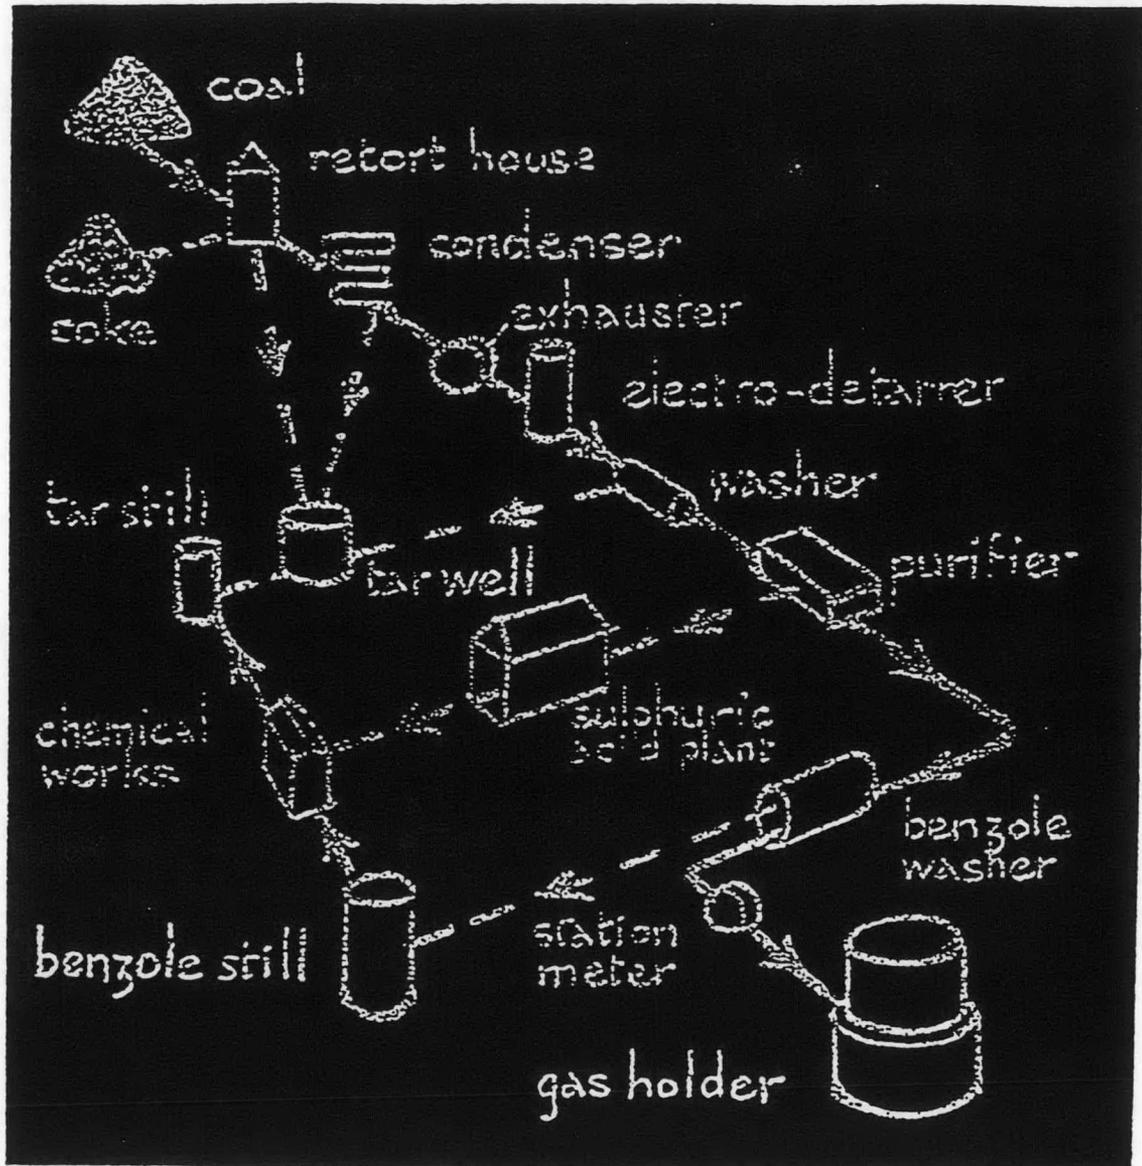


Figure 1: Diagram showing principal parts of a gasworks
(Gas Council - undated)

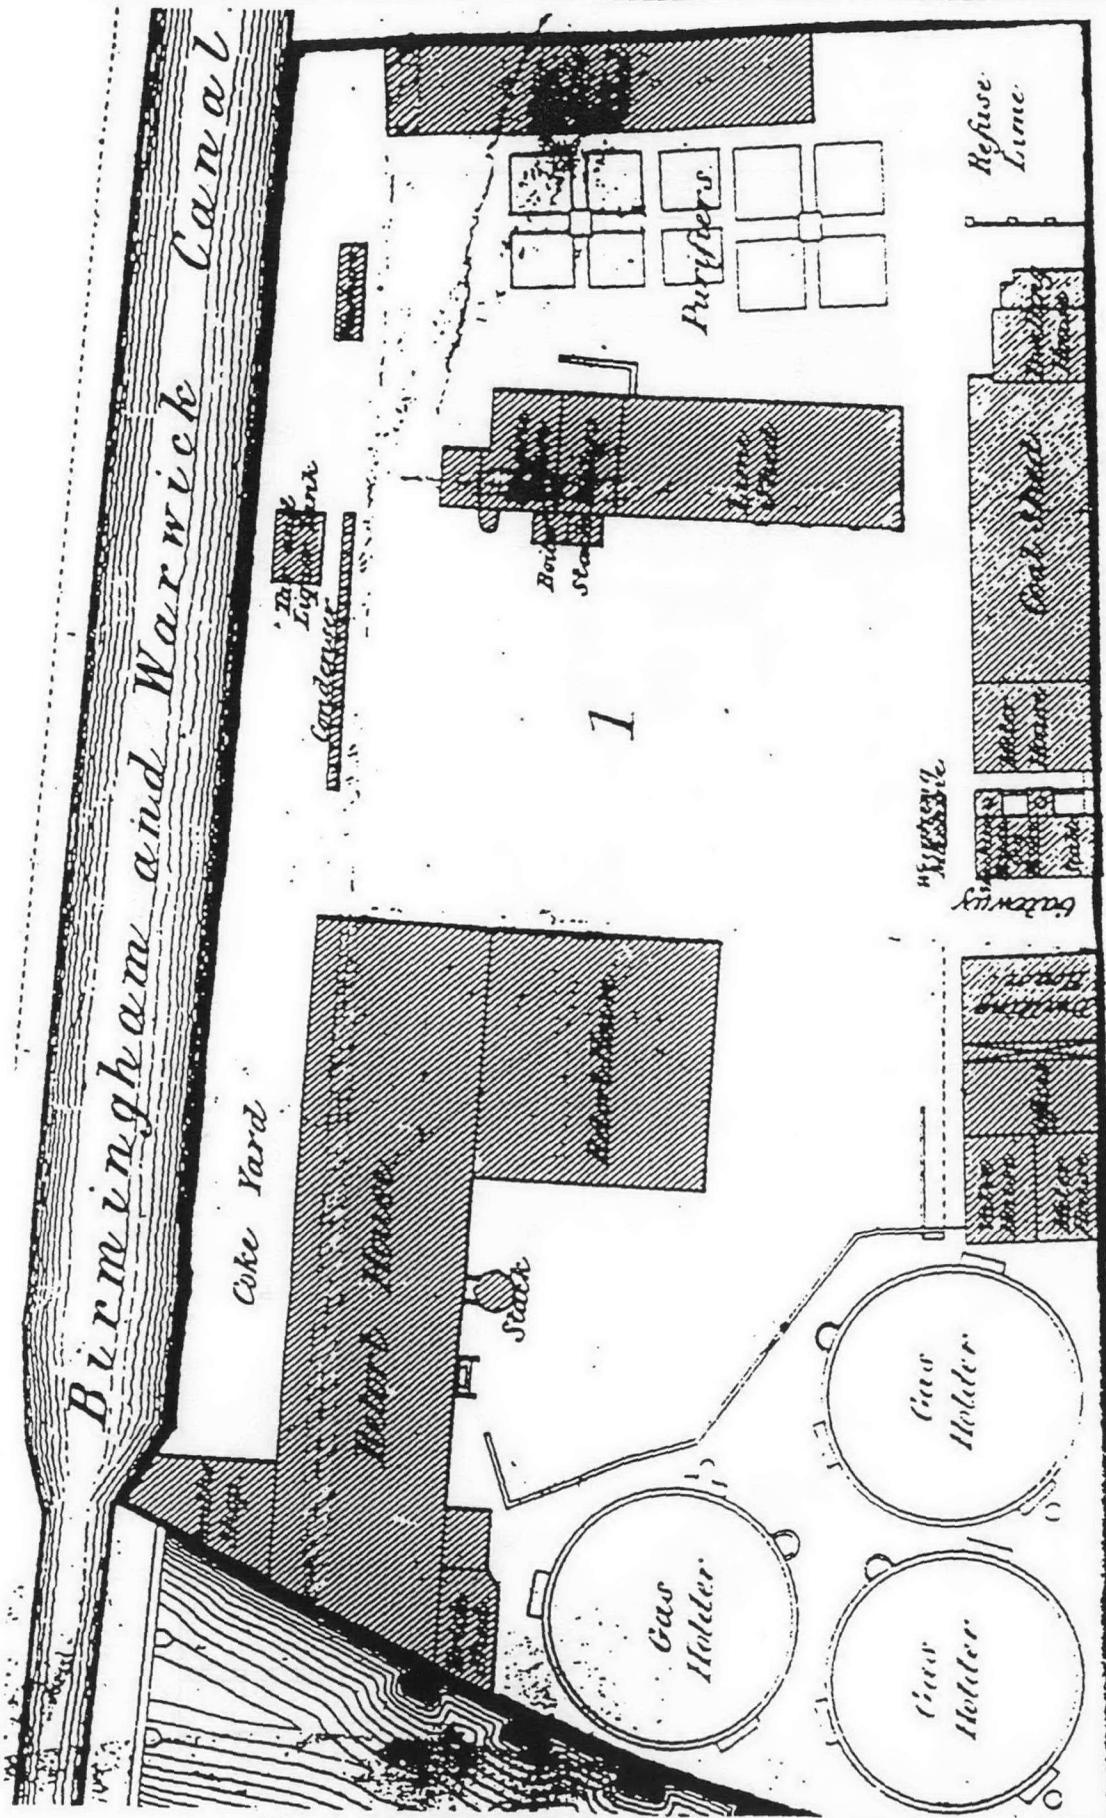

L O W E R F A Z E L E Y S T

Figure 2: Plan of the Fazeley Street gasworks, Birmingham of 1875

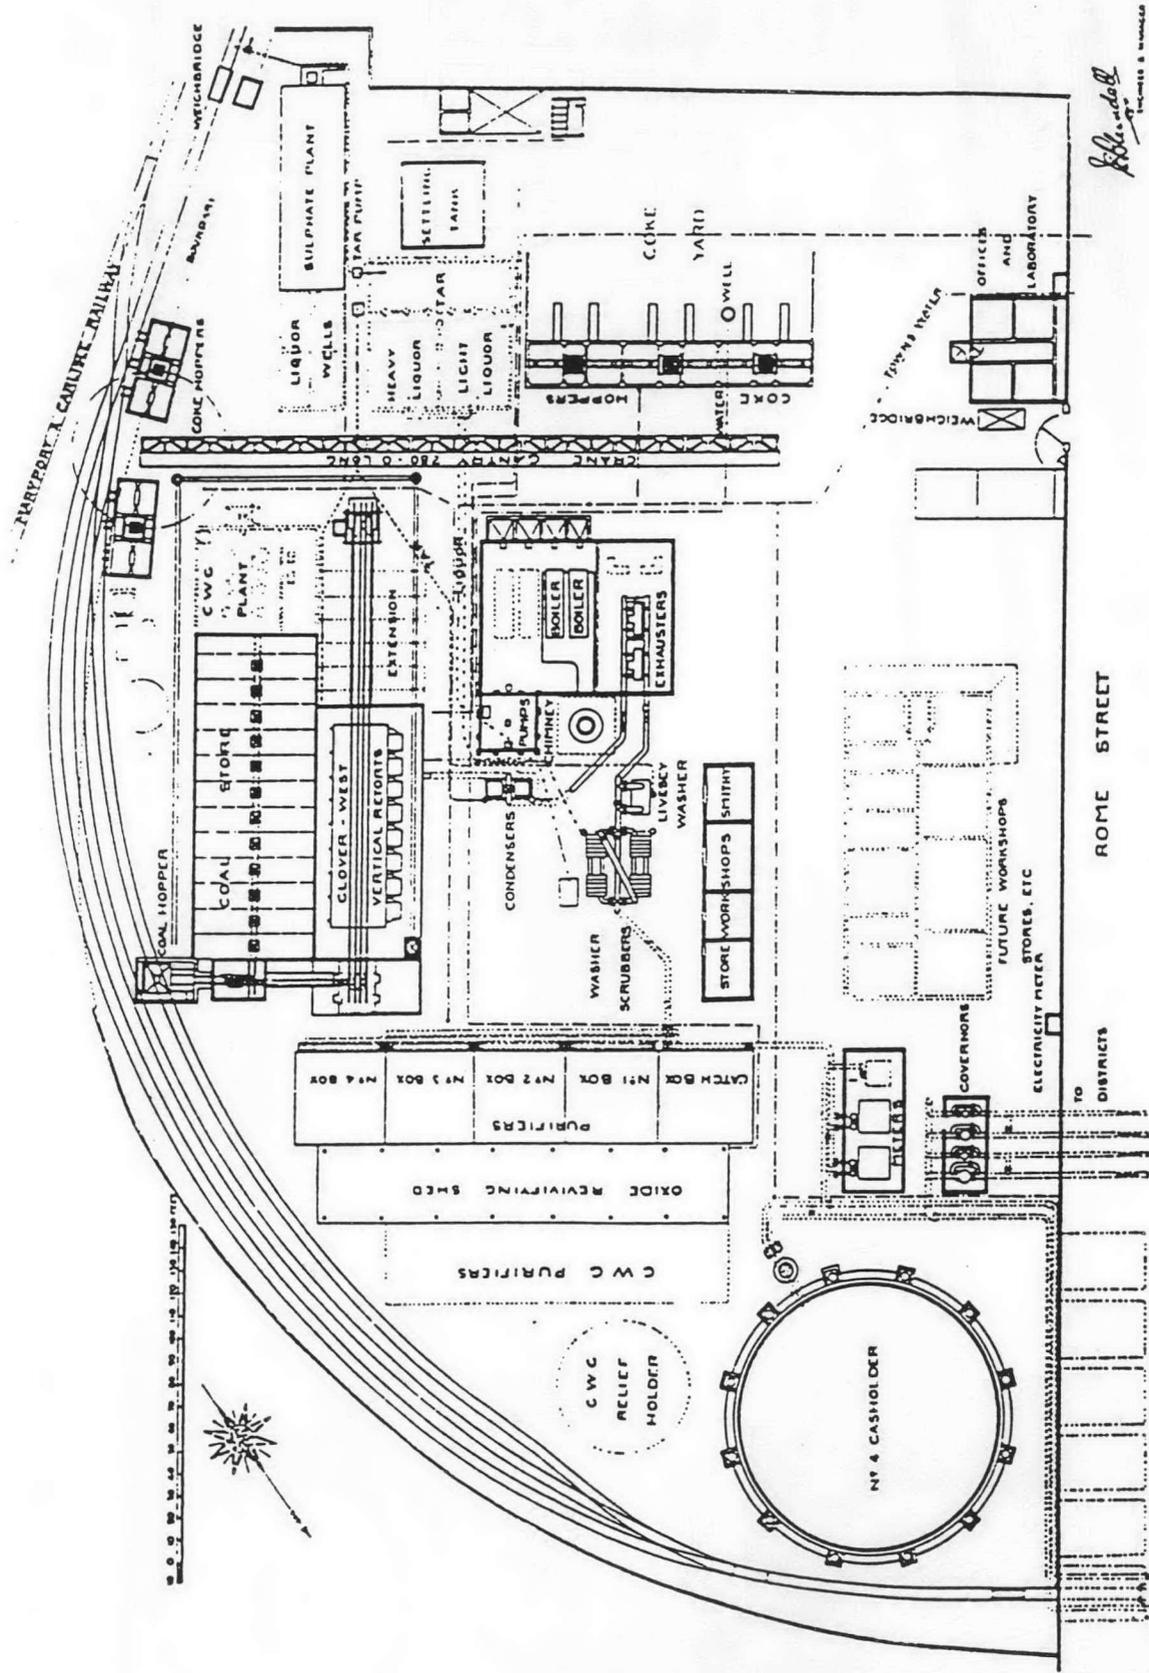


Figure 3: plan of Rome Street Gasworks in 1922 (City of Carlisle Gas Undertaking Rome St Gasworks official inauguration plant)

ROME STREET GAS WORKS GENERAL PLAN

Page Four

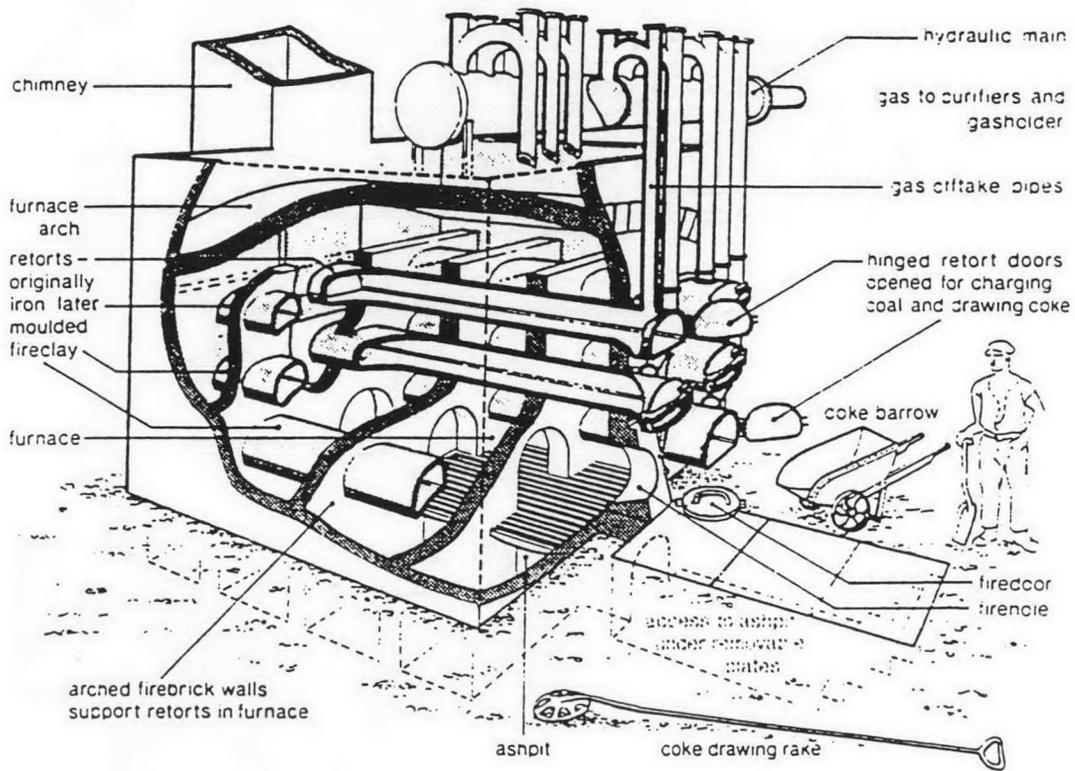


Figure 4: Horizontal gas retort bench, cut away diagram (Cossons 1987, 221)

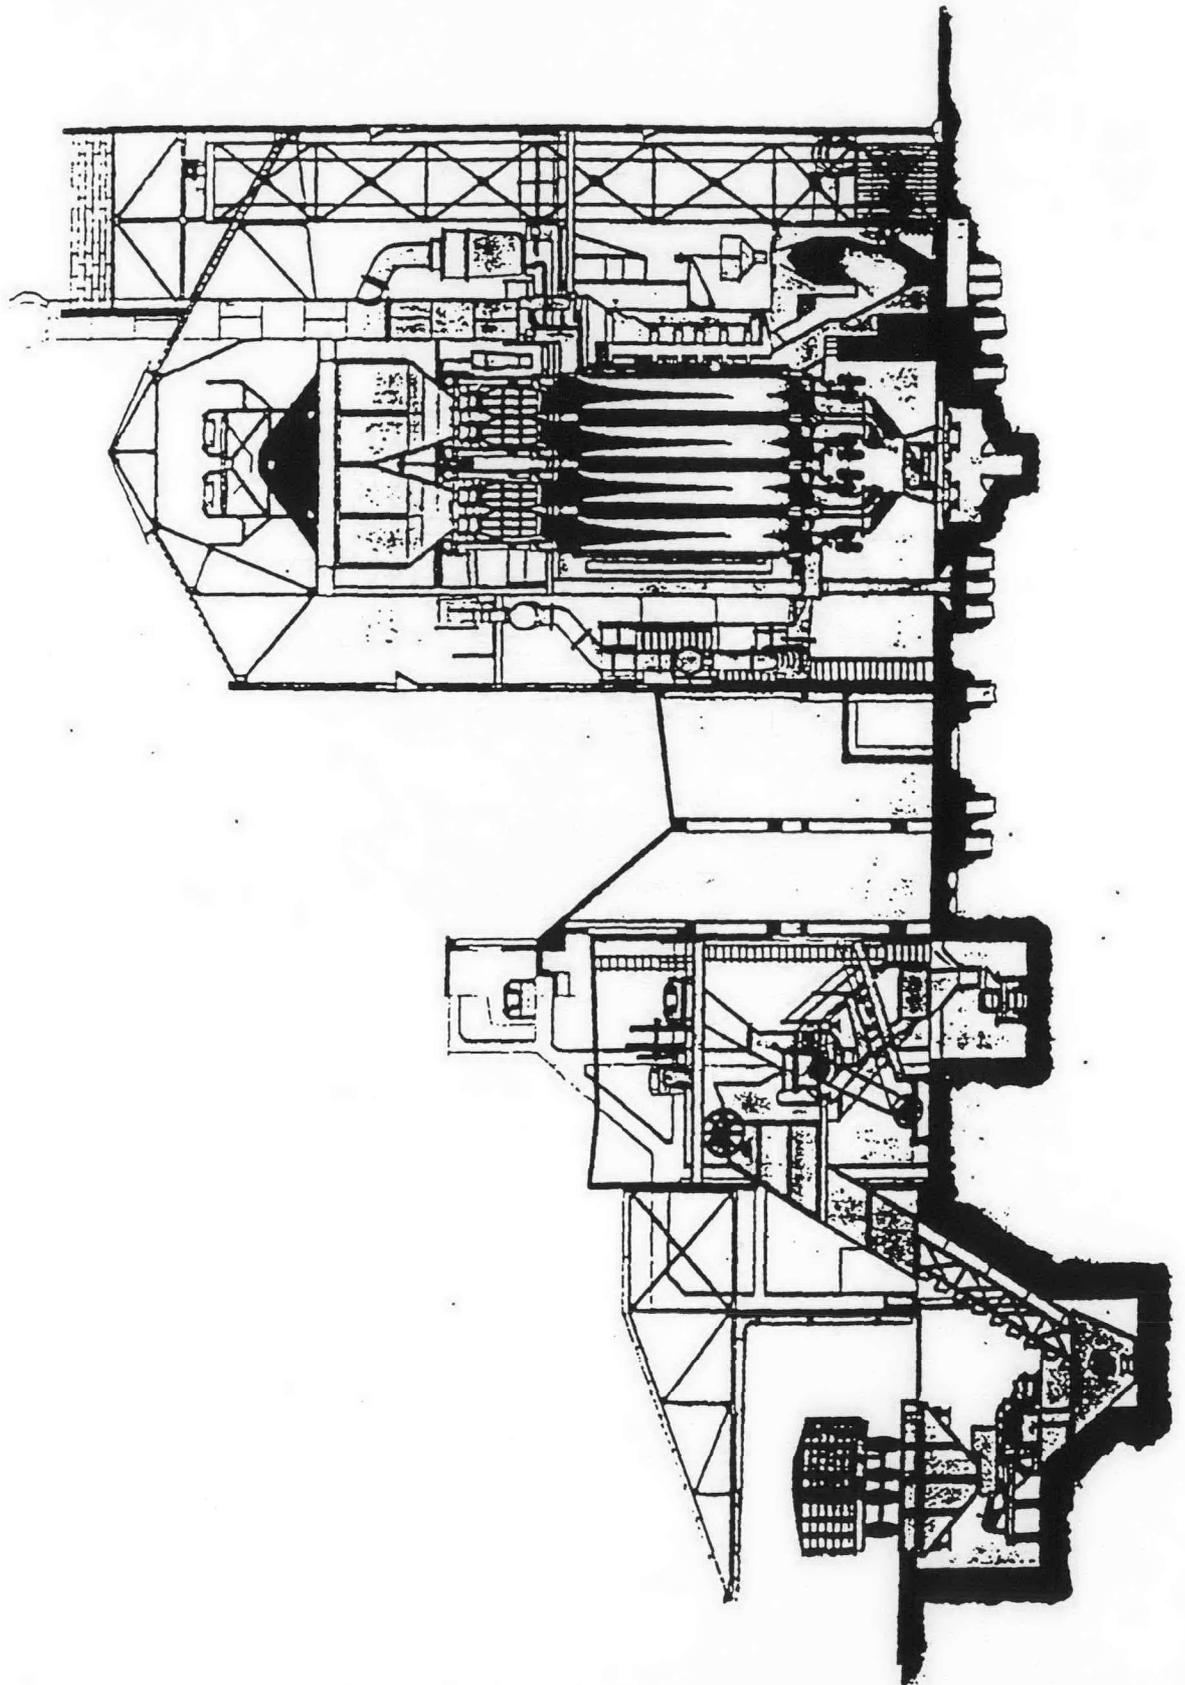


Figure 5: Cross-section of a Glover-West vertical retort bench with coal and coke handling plant (City of Carlisle Gas Undertaking Rome St Gasworks official inauguration plant)

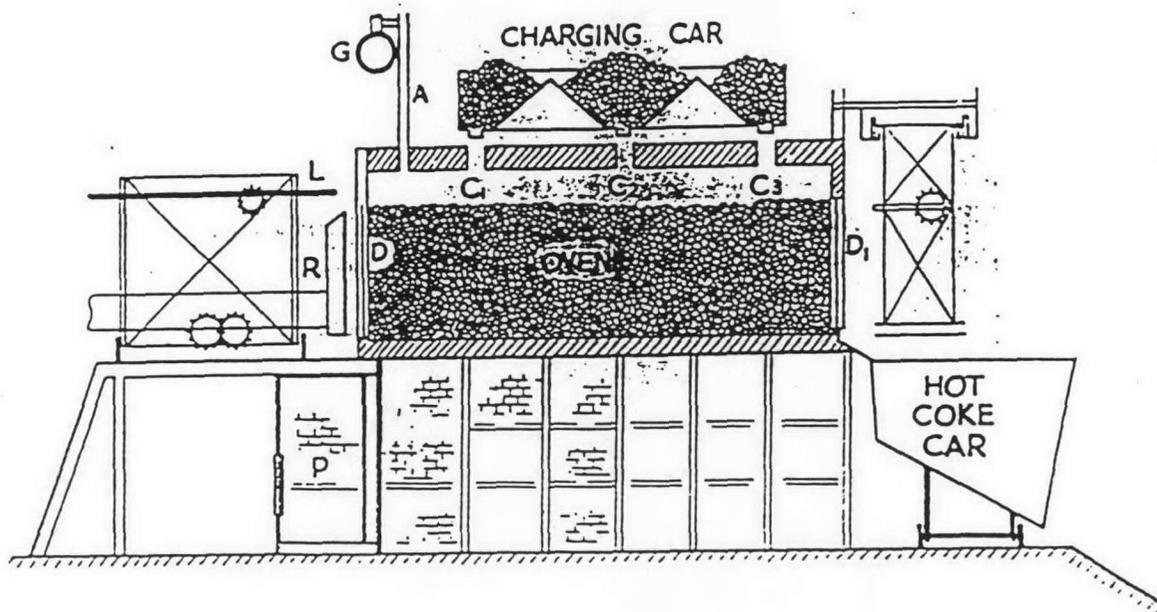


Figure 6: Diagram of coke oven plant
(Gas Council - undated)

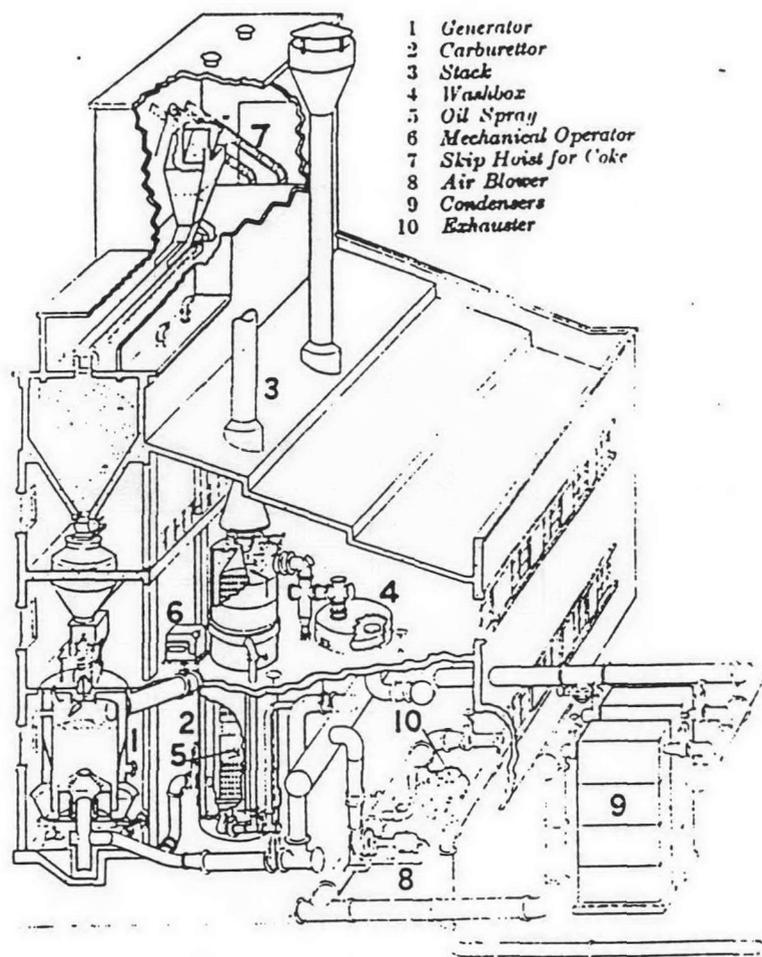


Figure 7: Diagram of Fulham Station Carburetted Water Gas Plant
(Fulham Station booklet)

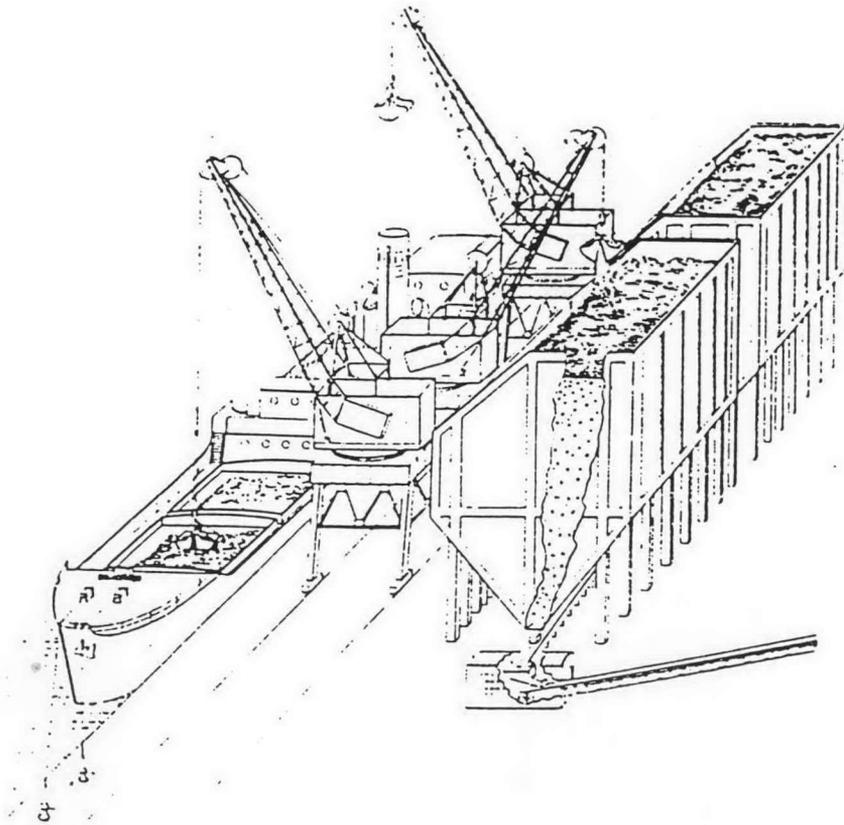


Figure 8: Diagram of coal handling plant at coal jetty (Fulham Station booklet)

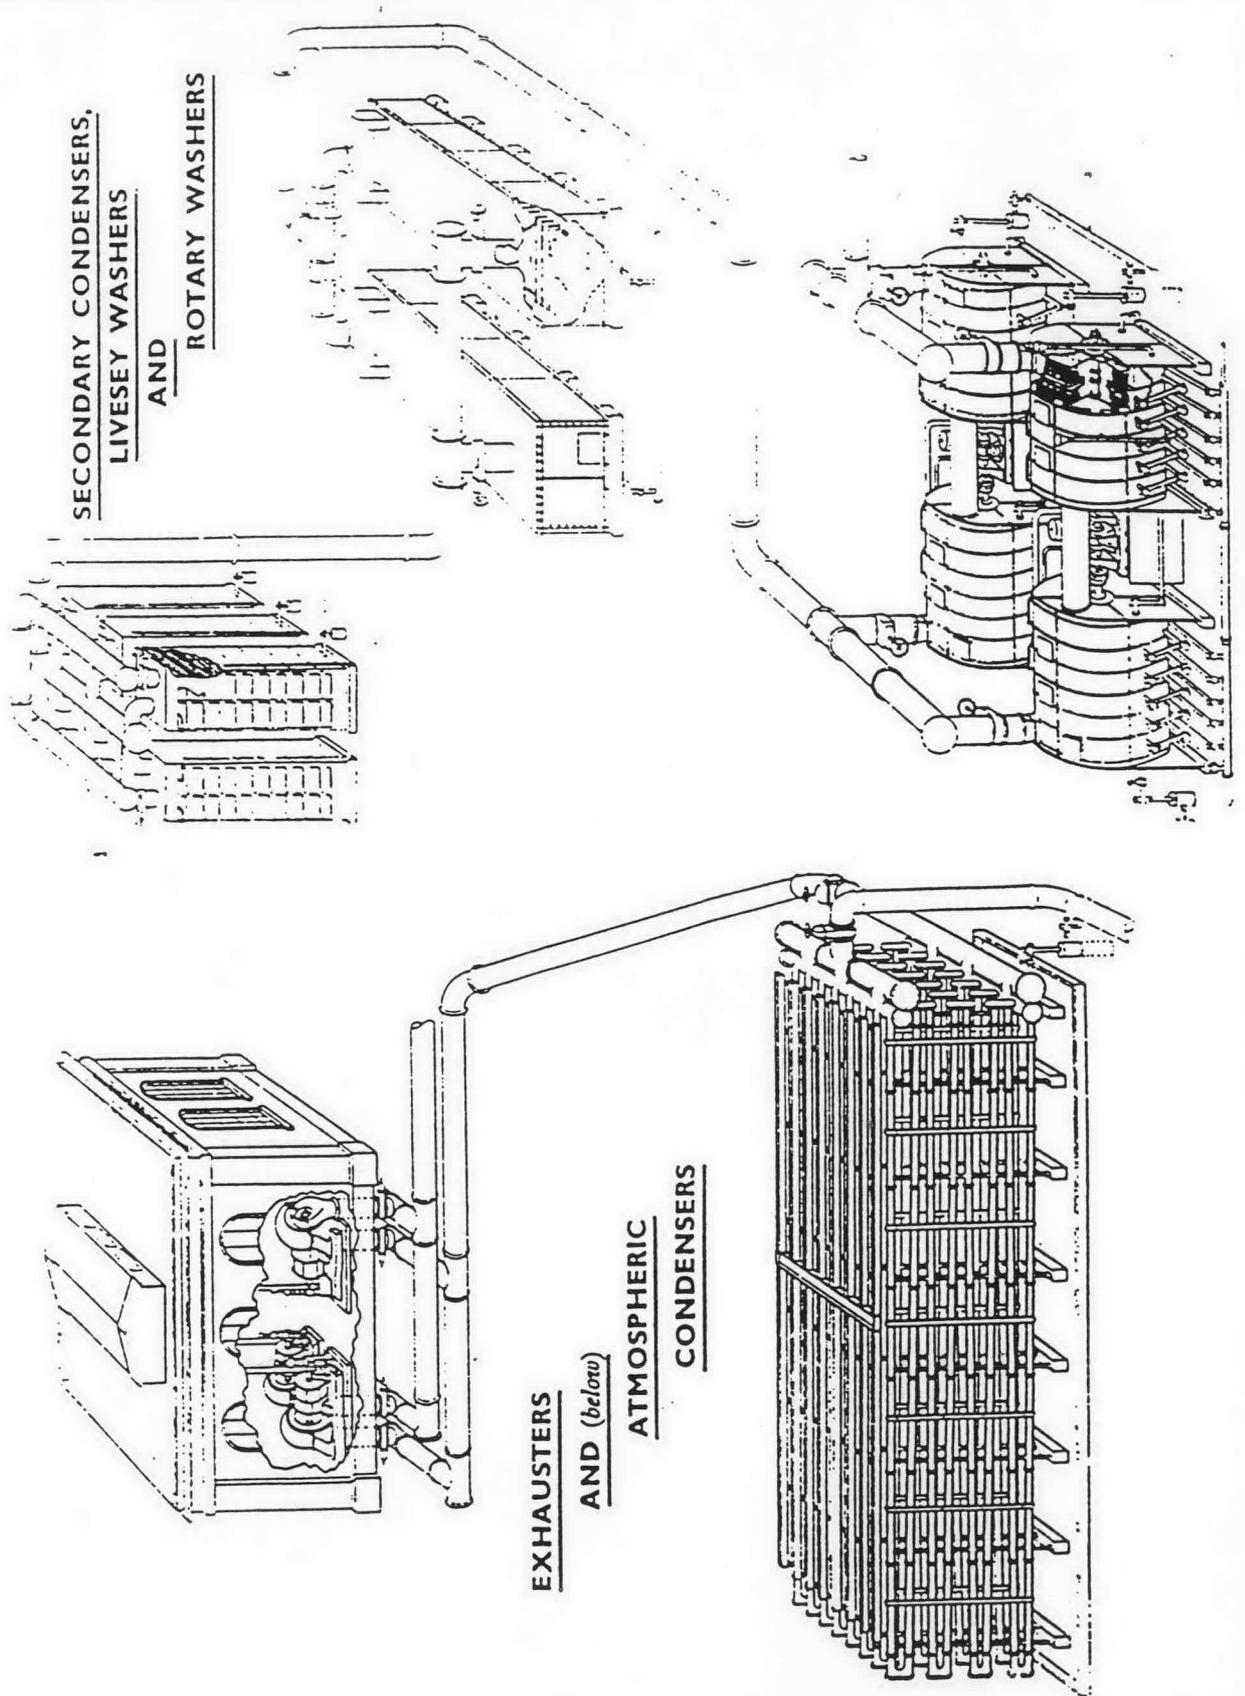


Figure 9: Diagrams of exhausters, condensers and washers at Fulham
(Fulham Station booklet)

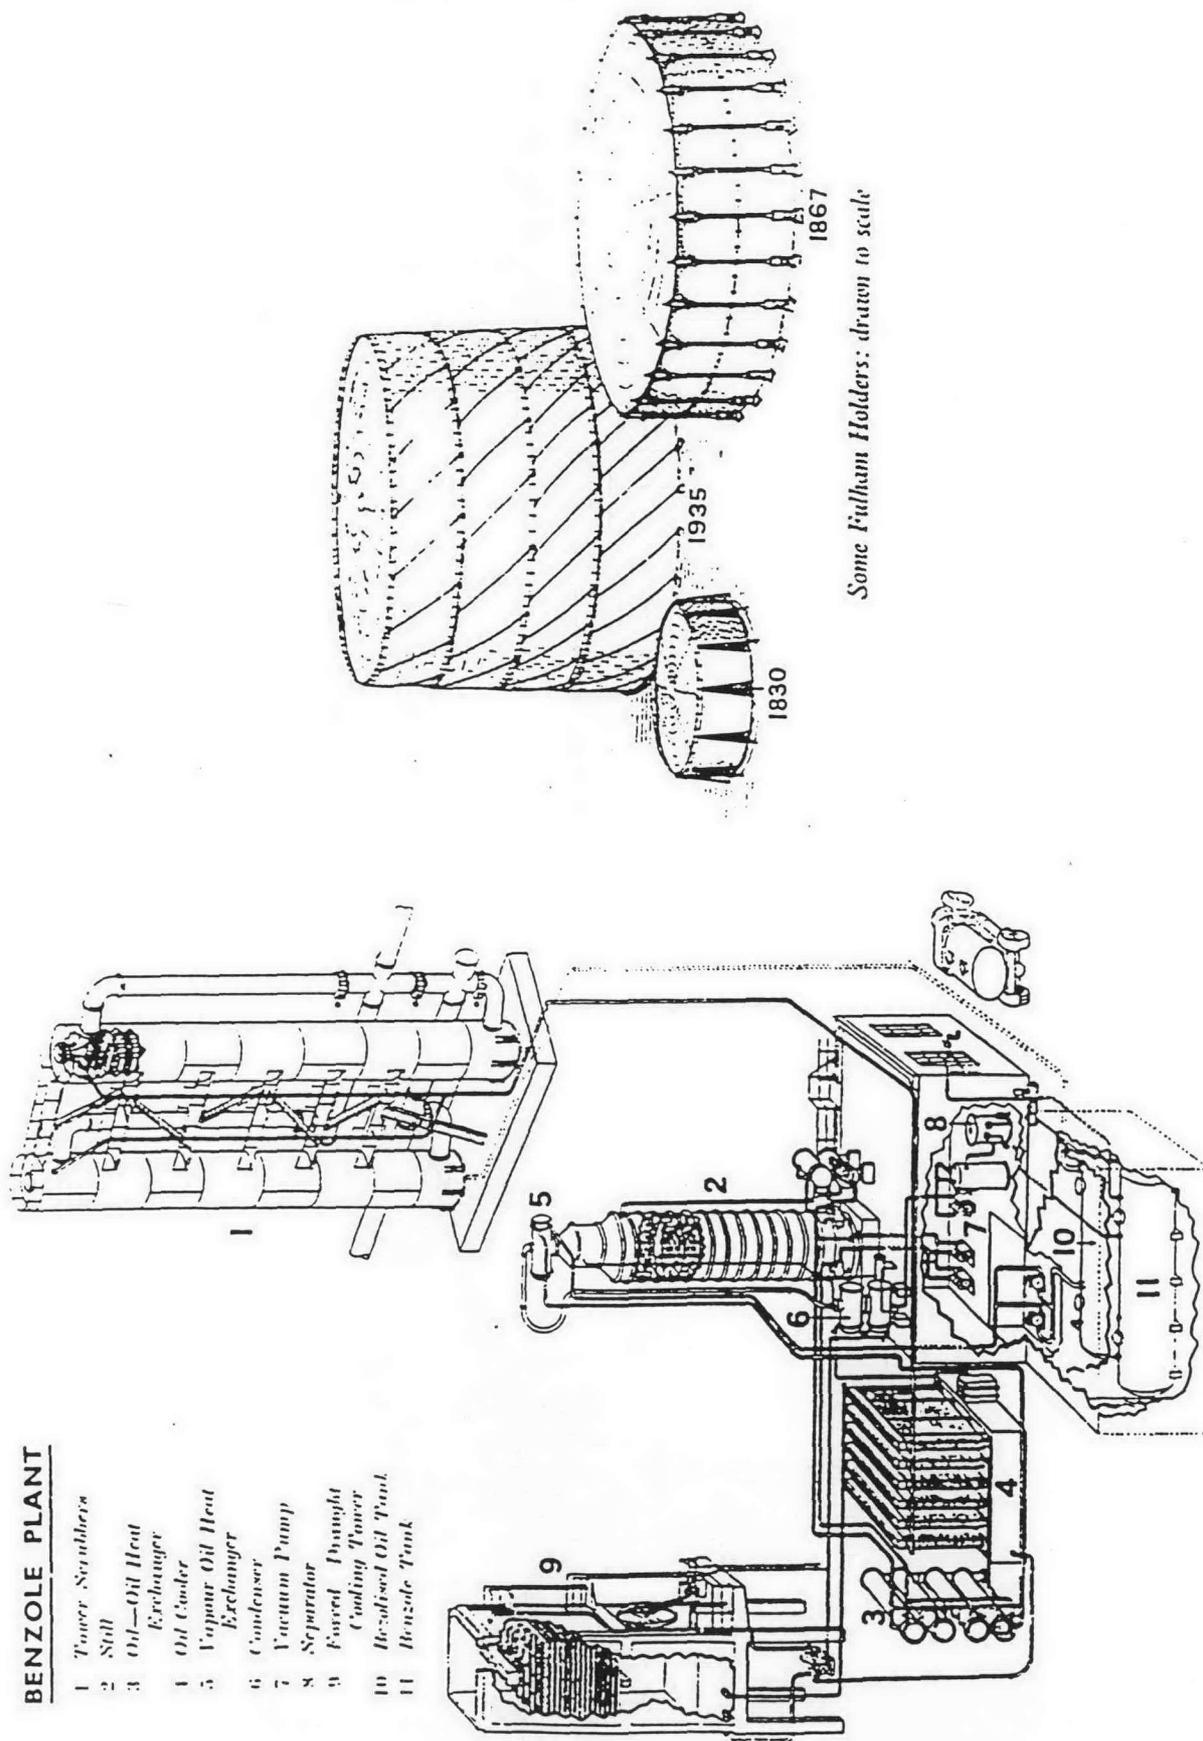


Figure 10: Benzole plant and gasholders at Fulham (Fulham Station booklet)

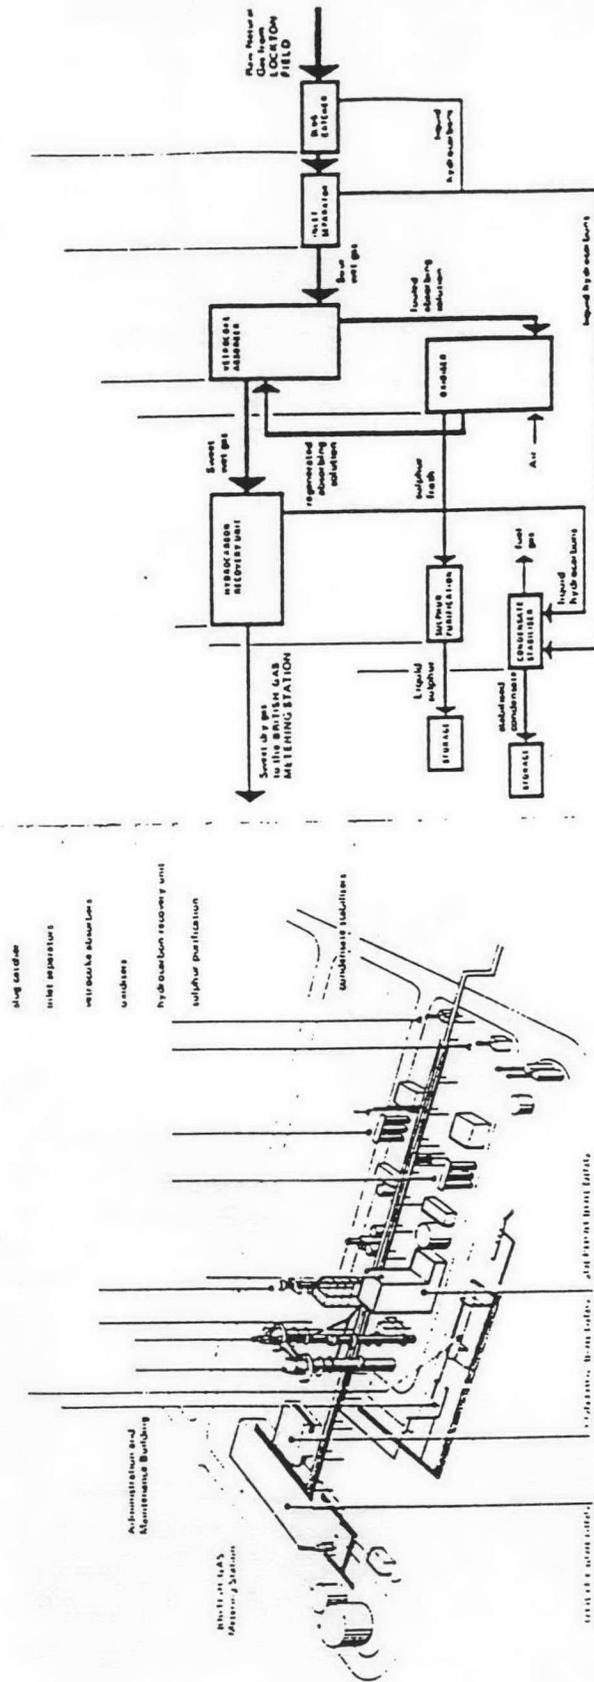


Figure 11: Diagram of Natural Gas Shore terminal (Wilson 1974, 32-3)

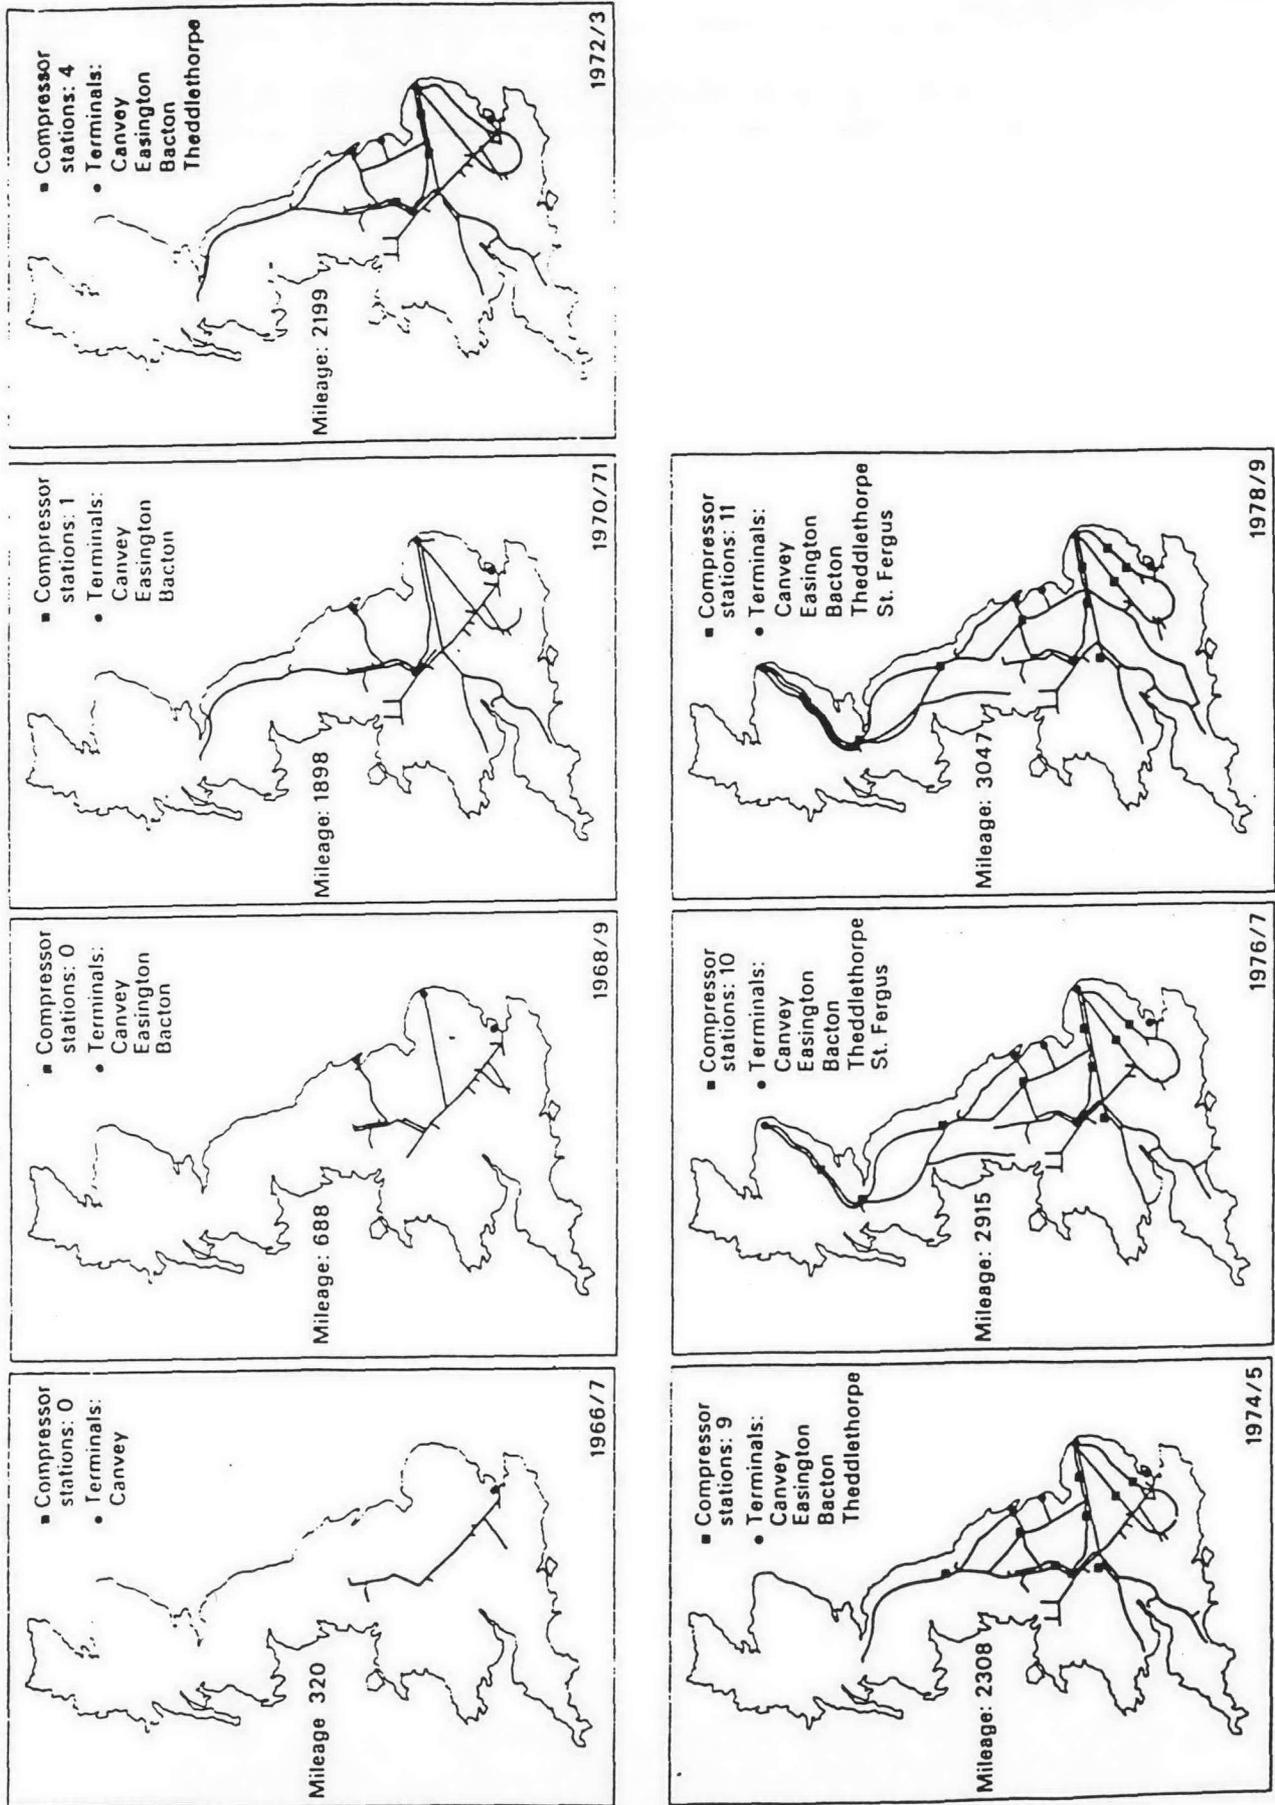


Figure 12: Growth of National Transmission System (Williams 1981, 226-7)

APPENDIX 2 - ADDRESS LIST FOR CIRCULATION

The following are in addition to the list of constant consultees maintained by English Heritage:

INDIVIDUALS

David Bick, Pound House, Newent, Gloucestershire. GL18 1PS
Dr Ivor Brown, 95 Manygates Lane, Sandal, Wakefield, West Yorkshire. WF2 7DL
Mike Davies-Shiel, Micklethwaite, Annisgarth Park, Windermere, Cumbria, LA23 2HX
K O M Golisti, 16 The Meadows, Hambleton, Selby, North Yorkshire, YO8 9HR
Jane Hatcher, 22b Bridge Street, Richmond, N Yorkshire, DL10 4RW
C J Lester, Wheel House, Waterwheel Lane, Branston, Lincoln, LN4 1LU
David Loverseed, 48 Flowery Field, Woodsmoor, Stockport, SK2 7ED
B R Minnitt, Seata House, Askrigg, Leyburn, N Yorkshire, DL8 3HG
Mike Rothwell, 237 Lammack Road, Blackburn, Lancashire.
Tim Smith, 30 Gaveston Drive, Berkhamstead, Herts, HP4 1JF
Brian Sturt, 94 Springbank Road, Wither Green, London, SE13 6SX
David Watt, De Montfort University, Leicester
Don Wilcock, 26 Bede Terrace, Bowburn, Durham, DH6 5DT
Barry Wilkinson, Editor Historic Gas Times, 19 Airedale Drive, Horsforth, Leeds, LS18 5ED
Neil Wright, Yarborough Lodge, 32 Yarborough Road, Lincoln, Lincolnshire, LN1 1HS

ORGANISATIONS

David Alderton, Association for Industrial Archaeology, 48 Quay Street, Halesworth, Suffolk, IP19 8EY
Professor Angus Buchannan, Centre for the Study of the History of Technology, Bath University, School of Humanities and Social Sciences, Claverton Down, Bath, Avon, BA2 7AY
London Gas Museum, BGplc, Twelvetrees Crescent, Bromley by Bow, London, Greater London, E3 3JH
Helen Ford, Archives Manager, National Gas Archive, BGplc, Common Lane, Partington, Greater Manchester, M31 4BR
Trevor Pickford, Curator, Leicester Gas Museum, BGplc, PO Box 28, Aylestone Road, Leicester, Leicestershire, LE2 7QH
Dr Jim Andrew, Birmingham Museum of Science & Industry, 136 Newhall Street, Birmingham, West Midlands, B3 1RZ
Nigel Crowe, Waterways Environment Services, British Waterways, The Locks, Hillmorton, Rugby, Warwickshire, CV21 4PP
Mick Hills, Curator, Bromley-by-Bow Gas Museum, London

- Dr Peter Wakelin, Cadw, Brunel House, 2 Fitzalan Road, Cardiff, CF2 1UY
- Dr Paul Collins, CBA (Midlands West), Beech Haven, Cobden Street, Wollaston, Stourbridge, West Midlands, DY8 3RU
- Tom Clare, CBA (NW England), School of Biological and Earth Sciences, John Moores University, Byrom Street, Liverpool, Merseyside, L3 3AF
- Carol Pyrah, Council for British Archaeology, Bowes Morrell House, 111 Walmgate, York, North Yorkshire, YO1 2UA
- Mark Sissons, Derbyshire Archaeological Society, 1 The Cottages, Far Coton, Market Bosworth, Nuneaton, Warwickshire, CV13 0PJ
- Dr Patrick Strange, Derbyshire Historic Buildings Trust, 1 Greenhill, Wirksworth, Derbyshire, DE4 4EN
- Chris Miele, English Heritage, Room 210, 23 Saville Row, London, Greater London, W1X 1AB
- John Ashley, Chairman, Fakenham Town Gasworks Museum Trust, . Fakenham, Norfolk.
- Alan Wilson, Curator, Greater Manchester Museum of Science and Industry, Liverpool Road, Castlefield, Greater Manchester, M3 4JP
- John Horne, Panel for the History of the Gas Industry, Institution of Gas Engineers
- K R Young, Secretary, Panel for the History of the Gas Industry, Institution of Gas Engineers, 21 Portland Place, London, W1N 3AF
- David de Hann, Ironbridge Gorge Museum, The Long Warehouse, Ironbridge Gorge Museum, Ironbridge, Telford, Shropshire, TF8 7AW
- John Powell, Ironbridge Gorge Museum, The Long Warehouse, Ironbridge Gorge Museum, Ironbridge, Telford, Shropshire, TF8 7AW
- Director, Ironbridge Institute, Ironbridge Gorge Museum, Ironbridge, Telford, Shropshire, 0952
- John Clayson, Keeper of Science and Technology, Museum of Science and Engineering, Blandford House, West Blandford Street, Newcastle-upon-Tyne, Tyne & Wear
- Mark Taylor, Director, Museums Association, 34 Bloomsbury, . London, WC1A 2SF
- Harry Beamish, Archaeologist, Northumbria Regional Office, National Trust, Scot's Gap, Morpeth, Northumberland, NE61 4EG
- David Thackray, Archaeological Advisor, Estates Advisory Office, National Trust, 33 Sheep Street, Cirencester, Gloucestershire, GL7 1QW
- Clive Ellam, Executive Secretary, Newcomen Society, c/o Science Museum, . London, SW7 2DD
- Peter Stephens, Technical Secretary, . Panel for Historical Engineering Works, Institution of Civil Engineers, Great George Street, Westminster, London, SW1P 3AA
- Dr Miles Oglethorpe, RCAHMS, John Sinclair House, 16 Bernard Terrace, Edinburgh, EH8 9NX

Mike Williams, Threatened Buildings Section, RCHME, Alexander House, 19 Fleming Way, Swindon, SN1 2NG

Andrew Williams, National Monuments Record, RCHME, Kemble Drive, Swindon, Wiltshire, SN1 2NG

Derek Robinson, Curator, Science Museum, Exhibition Road, London, Greater London, SW7 2DD

Society for Post-Medieval Archaeology, Museum of London, London Wall, London, EC2

Peter Daniels, Somerset IA Soc, 20 Shoreditch Road, Taunton, Somerset, TA1 3BU

Dr Harold Nabb, South Western Gas Society, Milestone, Warminster Road, Monckton Combe, Bath, Avon, BA2 7HY

J M Jones, Records Officer, Suffolk Industrial Archaeology Society, Hines Farm, Earl Stonham, Stowmarket, Suffolk, IP14 5HQ

Dr Stafford Linsley, Centre for Continuing Education, University of Newcastle-upon-Tyne, King George VI Building, The University, Newcastle-upon-Tyne, Tyne & Wear, NE1 7RU

Dr Richard Holder, Senior Architectural Advisor, Victorian Society, 1 Priory Gardens, Bedford Park, London, W4 1TT

Mr Lyndon Cave, Warwickshire IA Soc, 24 Portland Street, Leamington Spa, Warwickshire, CV32 5EY

AIA SOCIETIES

Mr J D Asteraki, Berkshire Industrial Archaeology Group, 122 Reading Road, Finchampstead, Wokingham, Berkshire, RG11 4RA

The Curator, Bewdley Museum, Load Street, Bewdley, Hereford & Worcester, DY12 2AE

The Director, Black Country Museum, Tipton Road, Dudley, West Midlands, DY1 4SQ

Mr Ron Moss, Industrial Archaeology Group, Black Country Society, 56 Lawrence Lane, Cradley Heath, Warley, West Midlands, B64 6EU

Mr R H Fullagar, Bristol Industrial Arch Society, 37 Perrycroft Avenue, Bishopsworth, Bristol, Avon, BS13 7RZ

Mr Robert J Flood, Cambridge IA Society, 21 Thodays Close, Willingham, Cambridge, Cambridgeshire, CB4 5LE

Ken Alger, Secretary, Cambridge IAS, 102 Cottenham Road, Histon, Cambridge, CB4 4ET

John Harrison, Cleveland Industrial Archaeological Society, 9 Campion Drive, Guisborough, Cleveland, TS14 8ZW

Mr T D Tomlin, Cleveland Industrial Archaeological Society, 63 Laburnum Road, Ormesby, Middlesbrough, Cleveland, TS7 9DQ

Miss C L Garnett, Cumbria Industrial Hist Society, The Garret, 135a Craig Way, Bowness-On-Windermere, Cumbria, LA23 3AX

Steven May, Derbyshire Archaeology Soc, 15 Gravel Pit Lane, Spondon, Derby, Derbyshire, DE21 7DA

- Brenda Innes, Hon Secretary, Dorset Ind Arch Soc, 10 Gold Hill, Shaftsbury, Dorset, SP7 8HB
- Mr K B Jones, Friends of Ironbridge Gorge, 2 Clee Rise, Little Wenlock, Telford, Shropshire, TF6 6AT
- Mr Pymm, Friends of Morwellham, C/O Morwellham Quay, Tavistock, Devon, PL19 8JL
- Dr R Wilson, Glos IA Soc, Oak House, Hamshill, Coaley, Dursley, Gloucestershire, GL11 5EH
- Mary Mills, Recording Group Secretary, Greater London IA Soc (GLIAS), 24 Humber Road, London, SE3 7LT
- Mr W Ineson, Halcrow Ind Arch Group, Sir W Halcro & Partners, Burderop Park, Swindon, Wiltshire, SN4 0QD
- J E E Robinson, Halifax Antiquarian Society, 8 Savile Royd, Savile Park Road, Halifax, West Yorkshire, HX1 2EY
- Mr Peter Eggleston, I A Recordings, PO Box 476, Telford, Shropshire, TF8 7RH
- Mr J Cooper, I.S.S.E.S, 73 Coniston Way, Blossom Hill, Bewdley, Hereford & Worcester, DY12 2QA
- P S Jarvis, Kent Mills Group, 16 Broadlands Crescent, New Romney, Kent, TN28 8JF
- Miss Susan Lee, Treasurer, Kettering Civic Society, 16 Charles Street, Kettering, Northamptonshire,
- Ron Fitzgerald, Leeds Industrial Museum, Armley Mills, Leeds, West Yorkshire.
- The Director, Leicestershire Museums, Arts & Records Service, 96 New Walk, Leicester, Leicestershire, LE1 6TD
- Mr Steve Little, Manchester Region Ind Arch Society, 19 Gibson's Road, Stockport, Greater Manchester, SK4 4JX
- J R Hammond-Seaman, , Meadhurst Club IA Section, BP Research Centre, Chertsey Road, Sunbury On Thames, Middlesex, TW16 7LN
- Adrian Jarvis, Chairman, Merseyside Industrial Heritage Society, National Museums & Galleries on Merseyside, Albert Dock, Liverpool, Merseyside, L3 4AA
- Mr Niall Roberts, Mills Research Group, 12 Laburnum Grove, New Malden, Surrey, KT3 3LQ
- Mr J D Storer, Curatorial Advisor, National Tramway Museum Society, Crich, Matlock, Derbyshire, DE4 5DP
- The Keeper, Newcastle Museum of Sci & Eng, Blandford House, Newcastle upon Tyne, Tyne & Wear.
- D J Manning, , Norfolk Industrial Archaeology Society, 223 St Faith's Road, Old Catton, Norwich, Norfolk, NR6 7AP
- Mr M Griffiths, Arch Section, North York CC, Planning Dept, County Hall, North Allerton, North Yorkshire, DL7 8AQ

Geoffrey Starmer, Northamptonshire Ind Arch Society, 34 The Crescent, Northampton, Northamptonshire, NN1 4SB

Hon Secretary, Northern Mill Engine Society, C/O 84 Watkin Road, Clayton-le-Willows, Chorley, Lancashire, PR6 7PX

Mike Gill, Northern Mine Research Society, 38 Main Street, Sutton in Craven, Keighley, Yorkshire, BD20 7HD

Don Morley, Notts IA Soc, 7 Woodside Road, Ravenshead, Mansfield, Nottinghamshire, NG15 9FX

Lynn Willies, Peak District Mines Hist Soc, Matlock Bath, Derbyshire,

Mr Roy Paulson, Hon Treasurer & Lib, Peak Mines District Mines Hist Society, Holt House, Holt Lane, Lea, Matlock, Derbyshire, DE4 5GD

Mr Stephen, Feber, Secretary, Quarry Bank Mill, Styal, Wilmslow, Cheshire, SK9 4LA

G. Edwards, Ryhope Engines Trust, Ryhope Engines Museum, Sunderland, Tyne & Wear, SR2 0ND

Mr Neil Barrow, Saddleworth Hist Society, Carr Farm Cottage, Diggle, Oldham, Greater Manchester, OL3 5ND

Mr G P Young, Society for Lincolnshire Hist & Arch, Jew's Court, Steep Hill, Lincoln, Lincolnshire, LN2 1LS

Hon Secretary, Somerset IA Society, 2 Blake Green, Ashcott, Bridgwater, Somerset, TA7 9QF

Brian J Murless, Hon Archivist, Somerset Industrial Archaeological Society, 46 Holway Avenue, Taunton, Somerset, TA1 3AR

David Gledhill, Somerset Industrial Archaeology Society, 9 Birch Grove, Taunton, Somerset, TA1 1EE

John Watts, South Wilts Ind Arch Society, 29 Salisbury Road, Fordingbridge, Hampshire, SP6 1EH

Graham Hague, South Yorkshire Industrial History Society, 39 Cobden View Road, Crookes, Sheffield, South Yorkshire, S10 1HP

Mrs E G Crabb, Staffs Ind Arch Society, 'High Oaks', 13 Holly Hill Road, Cannock Wood, Rugeley, Staffordshire, WS15 4RE

R D Greatrix, Staffs Narrow Gauge Railway Society, Holly Cottage, Gorse Lane, Knightley, Stafford, Staffordshire, ST20 0JP

Mr Steve Worsley, Suffolk Ind Arch Society, 24 Abbotsbury Close, Ipswich, Suffolk, IP2 9SD

Mrs Pam Moore, Vice Chairman, SUIAG, 59 Bodycoats Road, Chandlers Ford, Hampshire, SO53 2HA

P Tarplee, Hon Secretary, Surrey Ind Arch Group, 'Donard', East Street, Bookham, Leatherhead, Surrey, KT23 4QX

Ron Martin, Gen Secretary, Sussex Ind Arch Society, 42 Falmer Avenue, Saltdean, Brighton, East Sussex, BN2 8FG

Hon Secretary, The Arkwright Society, Cromford Mill, Mill Lane, Cromford, Derbyshire, DE4 3RQ

Mr Tony Hirst, Director, The Boat Museum, Dockyard Road, Ellesmere Port, South Wirral, L65 4EF

The Director, The Chalkpits Museum, Houghton Bridge, Amberley, Arundel, West Sussex, BN18 9LT

Neil Dowlan, The Secretary, Thwaite Mills Society, Thwaite Mills, Thwaite Lane, Stourton, Leeds, West Yorkshire, LS10 1RP

E W A Edmonds, Trevithick Society, Newlands, Tarrandean Lane, Perranwell Station, Truro, Cornwall, TR37 NW

W Newby, Trevithick Society, 5 Fairfield Close, Lelant, St Ives, Cornwall, TR2 36JY

Mr P Coldwell, Vale of the White Horse IA Grp, 4 Hyde Road, Denchworth, Wantage, Oxfordshire, OX12 ODR

Mr Martin J Green, Warwickshire Ind Arch Society, 'Argyll', 2 (B) Union Road, Leamington Spa, Warwickshire, CV32 5LT

Mr J D Hedges, West Yorkshire Archaeology Service, 14 St John's North, Wakefield, West Yorkshire, WF1 3QA

Mrs M Miles, Westonzoyland Engine Trust, Rose Cottage, Lower Durston, Taunton, Somerset, TA3 5AH

The Secretary, Wilts Arch & Nat Hist Soc, The Museum, 41 Long Street, Devizes, Wiltshire, SN10 INS

Pam Slocombe, Wiltshire Buildings Record, Library & Museum Service HQ, Bythesea Road, Trowbridge, Wiltshire, BA14 8BS

The Librarian, Worcestershire Arch Soc, Commandery, Sinbury, Worcester, Hereford & Worcester, WR1 2HU

Mrs Janine, Wheatley, Worcs Ind Arch & Loc Hist Society, 4 Hazewood Close, Worcester, Hereford & Worcester, WR5 1RH

Margaret Smith, Secretary, Yorkshire Arch Soc, 8 Roxholme Place, Leeds, West Yorkshire, LS7 4JQ