

BISHOPTHORPE

Conservation Area No. 12 (43.3 ha)

Introduction

Bishopthorpe Conservation Area was designated in 1989. It is quite extensive, encompassing Main Street, the Archbishop's Palace and grounds, and open areas that are important to the village setting.

History

Previously called St Andrewthorpe is known as the home of the Archbishop of York. This association began in the 13th Century when Archbishop Grey bought a Manor House and gave it to the Dean and Chapter of York. For centuries Bishopthorpe was really a hamlet centred around the palace. By 1800 its population was 218, and still only 439 at the turn of the 20th Century. Major expansion began in the 1930's, accelerating to treble the population in the last 30-40 years, to about 3250 people today.

Important Buildings

From 13th Century origins the Archbishop's Palace has evolved, with a re-modelling of 1763-9 by Thomas Atkinson. Magnesian limestone, and pinkish red and brown brick are the main materials. The Gatehouse, former stables, Brewster's Cottage and Brewhouse are of the same period. All are listed buildings, as is the folly in the Palace Grounds.

The ruins of the former St Andrew's Church date from 1768, on the site of a 13th Century Church. The present Parish Church of St Andrews (1898-1902) is by C Hodgson Fowler. The new Church Hall is a pleasing modern addition to the churchyard enclave. Listed buildings form most of the southern side of Chantry Lane: Chestnut Cottage (possibly a former inn), The Cottage, the White House and the Chantry. Other listed buildings are: Priory Corner (formerly The Home Farm) and the Ebor Inn (both mid-18th Century); and Bishopthorpe Garth (1908) and its accompanying cottage and mews by Walter Brierley.


Character

The Palace Gardens. Fields and The Garth retain an open landscape setting to the north of Bishopthorpe. Within this are two enclaves of valuable buildings: St Andrew's Church and Bishopthorpe Garth. Trees, especially along the northern fringes, screen the York by-pass. The walls of the Palace Gardens define the northern edge of Bishopthorpe with an intriguing air of privacy.

Archbishop's Palace and Grounds and Chantry Lane: the wedge of dense woodland in the Palace grounds is a strong landscape feature, important to the character of Bishopthorpe Road and the Riverside, each in their own way. These woods and the glade of trees along Chantry Lane protect and maintain a discreet, rural setting for the Palace and its attendant buildings. This is complemented by the dignity of the Group of Georgian houses forming the south side of Chantry Lane, with their subtle textures of brick, stone and colourwash, leading to the ruins of the former St Andrew's Church. Chantry Lane is evocative; a tranquil place to reflect upon Bishopthorpe past and present, just beyond the bustle and more secular attractions of Main Street.

Cricket Ground and Ferry Lane: the ferry across the River Ouse ceased in the 1930's. Ferry Lane, with its cottage, and the adjoining Cricket Ground are still disarmingly rural in character. The riverside has a strong woodland setting along its banks.


Main Street bustles, with its shops, pubs and social facilities. There has been some unsympathetic infill development and alterations, notably the loss of traditional sash windows. However, Main Street's historic form and character survives, based upon a typical medieval layout. Long narrow walled plots extend back from the street frontage, to North Lane (formerly "Black Lane") and the open fields beyond. On the south side, this open setting has been lost with "suburban" development. Outbuildings or additions

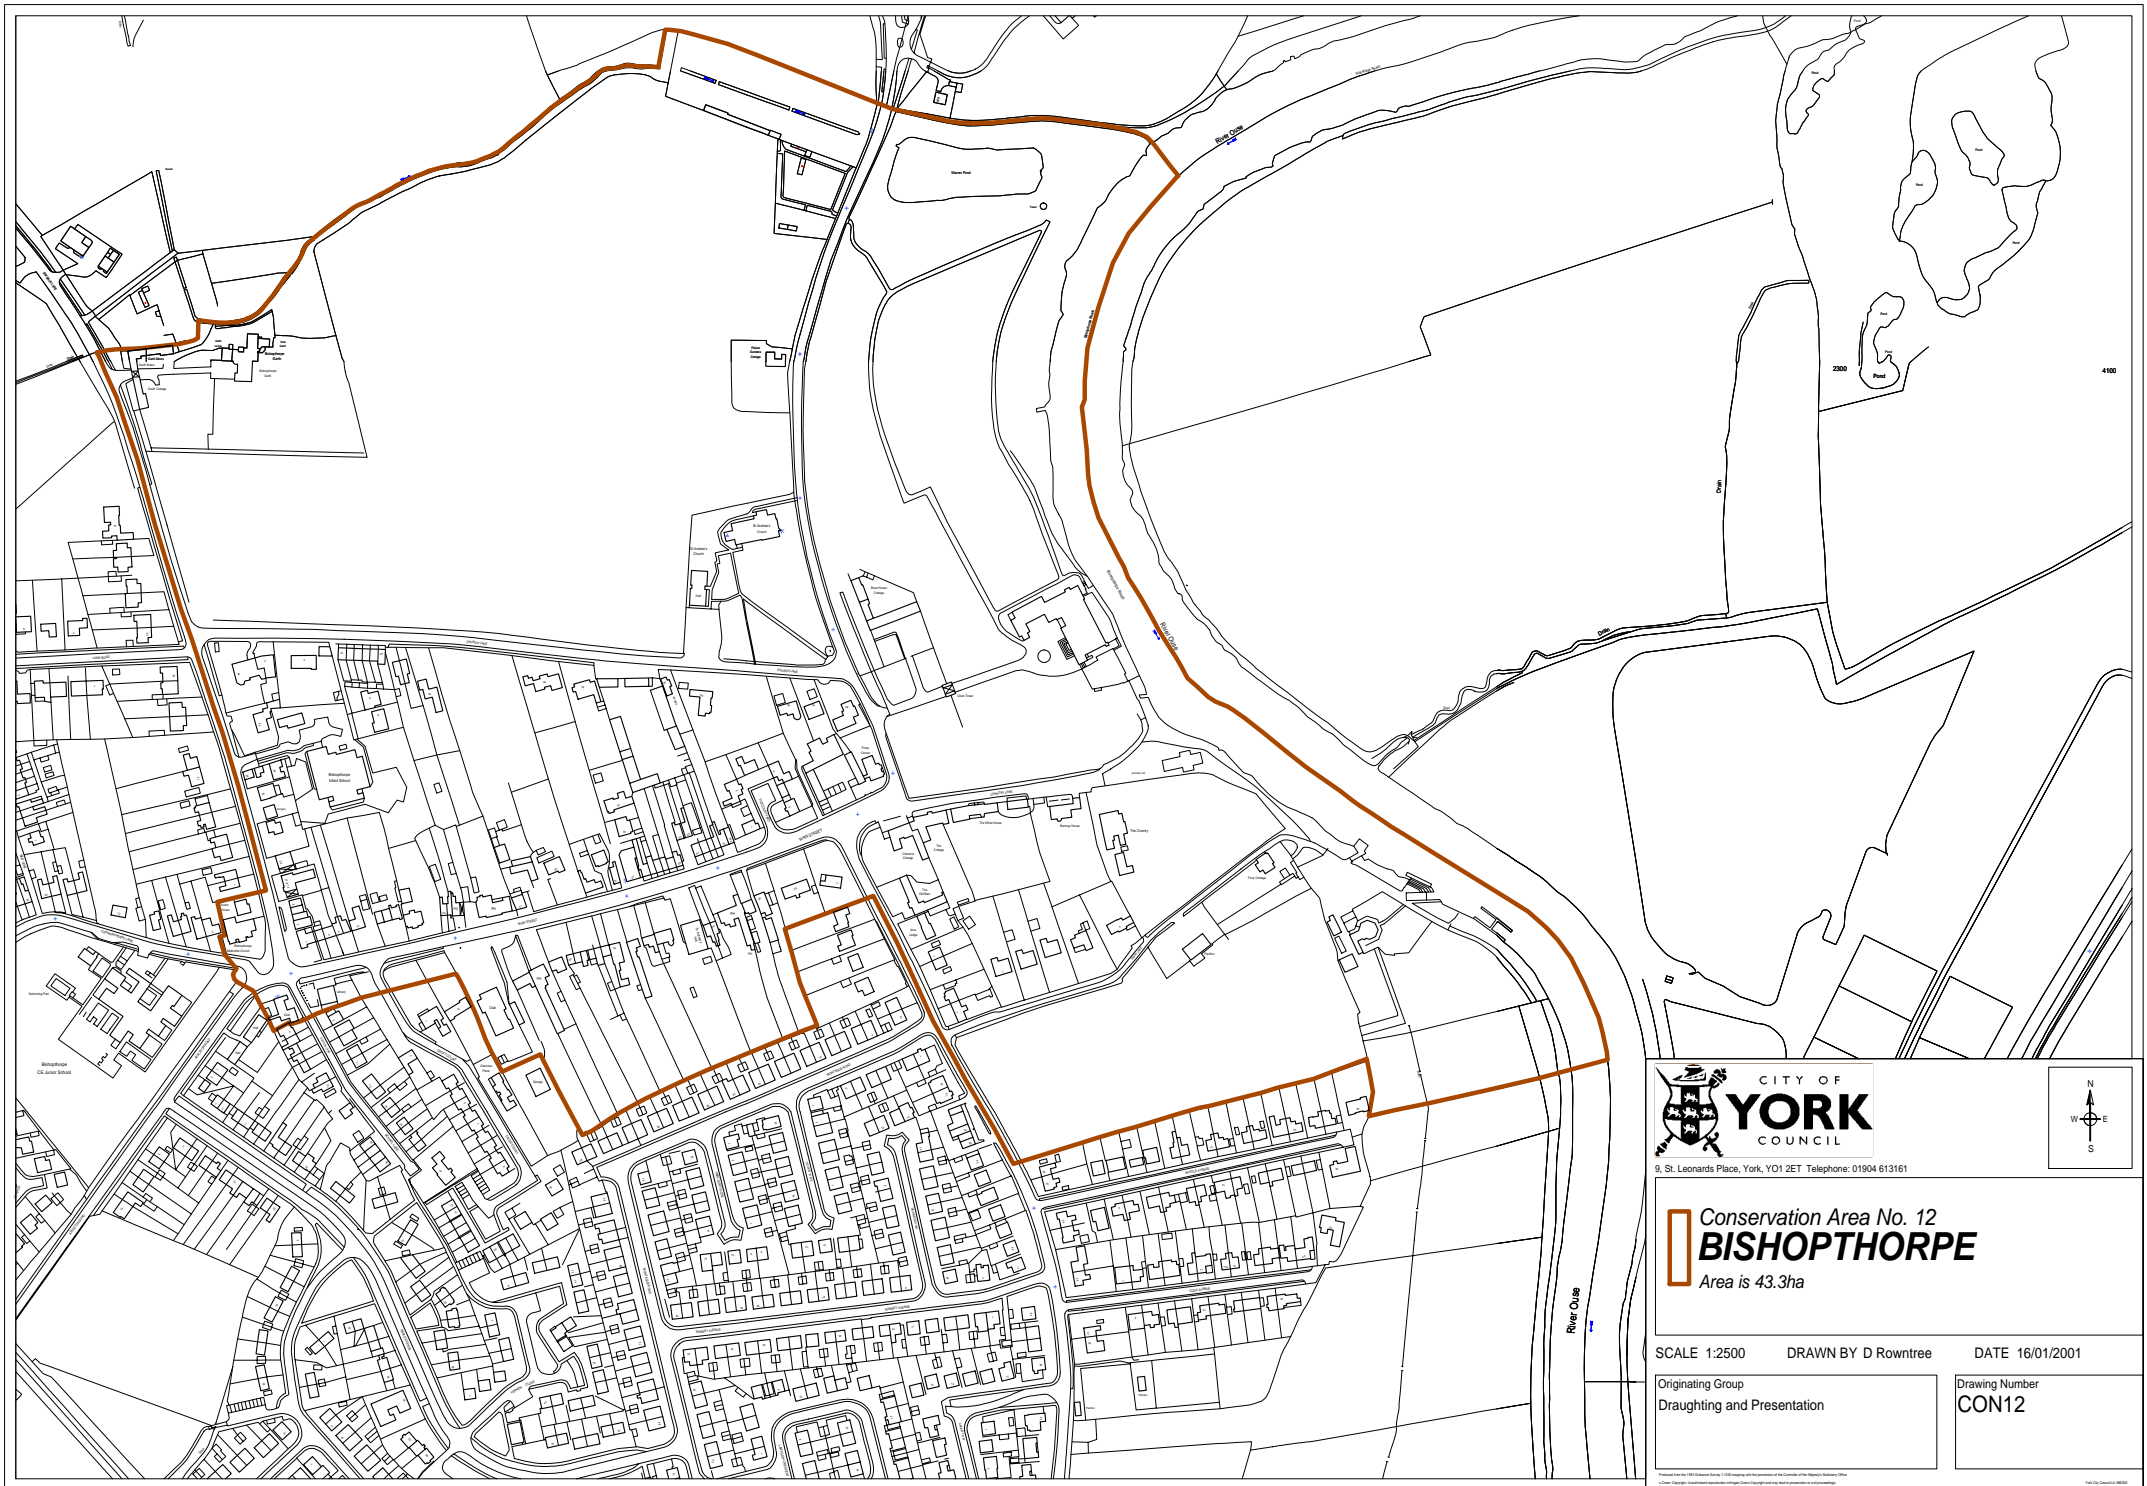


CITY OF YORK
 COUNCIL

9, St. Leonards Place, York, YO1 2ET Telephone: 01904 613161




Conservation Area No. 12
BISHOPTHORPE
 Area is 43.3ha

SCALE 1:2500	DRAWN BY D Rowtree	DATE 16/01/2001
Originating Group Draughting and Presentation		Drawing Number CON12

Printed on 100% recycled paper, 100% recycled ink. Printed in the UK. The City of York Council is a registered charity.